



WMT16 TOUCH ACTIVATED TIMER AND ON/OFF SWITCH OPERATING INSTRUCTIONS

Timing Range Switch Positions

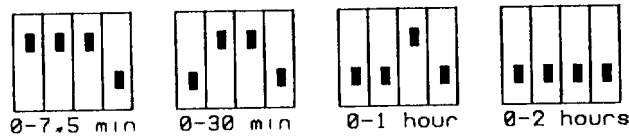

ON/OFF Switch only

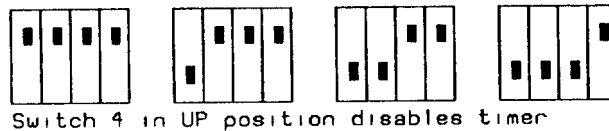


To use the WMT16 as a timer, position 4 on the DIL switch must be DOWN. Select timing range required with DIL switch positions 1, 2, and 3 as indicated in the diagram above. Then turn thumbwheel control to adjust timing. (Clockwise to increase).

To operate, touch designated area on the front panel. The timer will switch on, the mains output will be switched from terminal 2 to terminal 4 and the red LED indicator will light up. The timer will automatically switch off at the end of the timing period, or it can be switched off manually at any time during that period by touching the front panel again.

To disable the timer and use the unit as a touch activated SPDT switch only, position 4 on the DIL switch must be UP.

To operate, touch designated area on the front panel. The unit will switch on, the mains output will be switched from terminal 2 to terminal 4 and the red LED indicator will light up. To switch off, touch the front panel again when the switched output will revert to its original state.

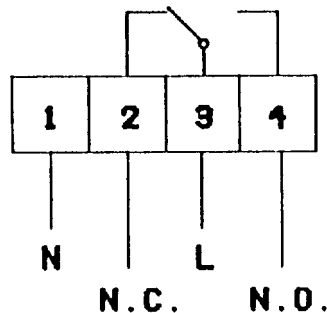

Operating voltage is 200-250VAC

Current rating @ 250VAC 16A Resistive
 10A Incandescent lighting
 6A Fluorescent lighting

In order for the unit to be protected to IP55, it is important to fit the plastic screw covers provided over the 2 fixing screws and to screw the front plate firmly onto the box.