

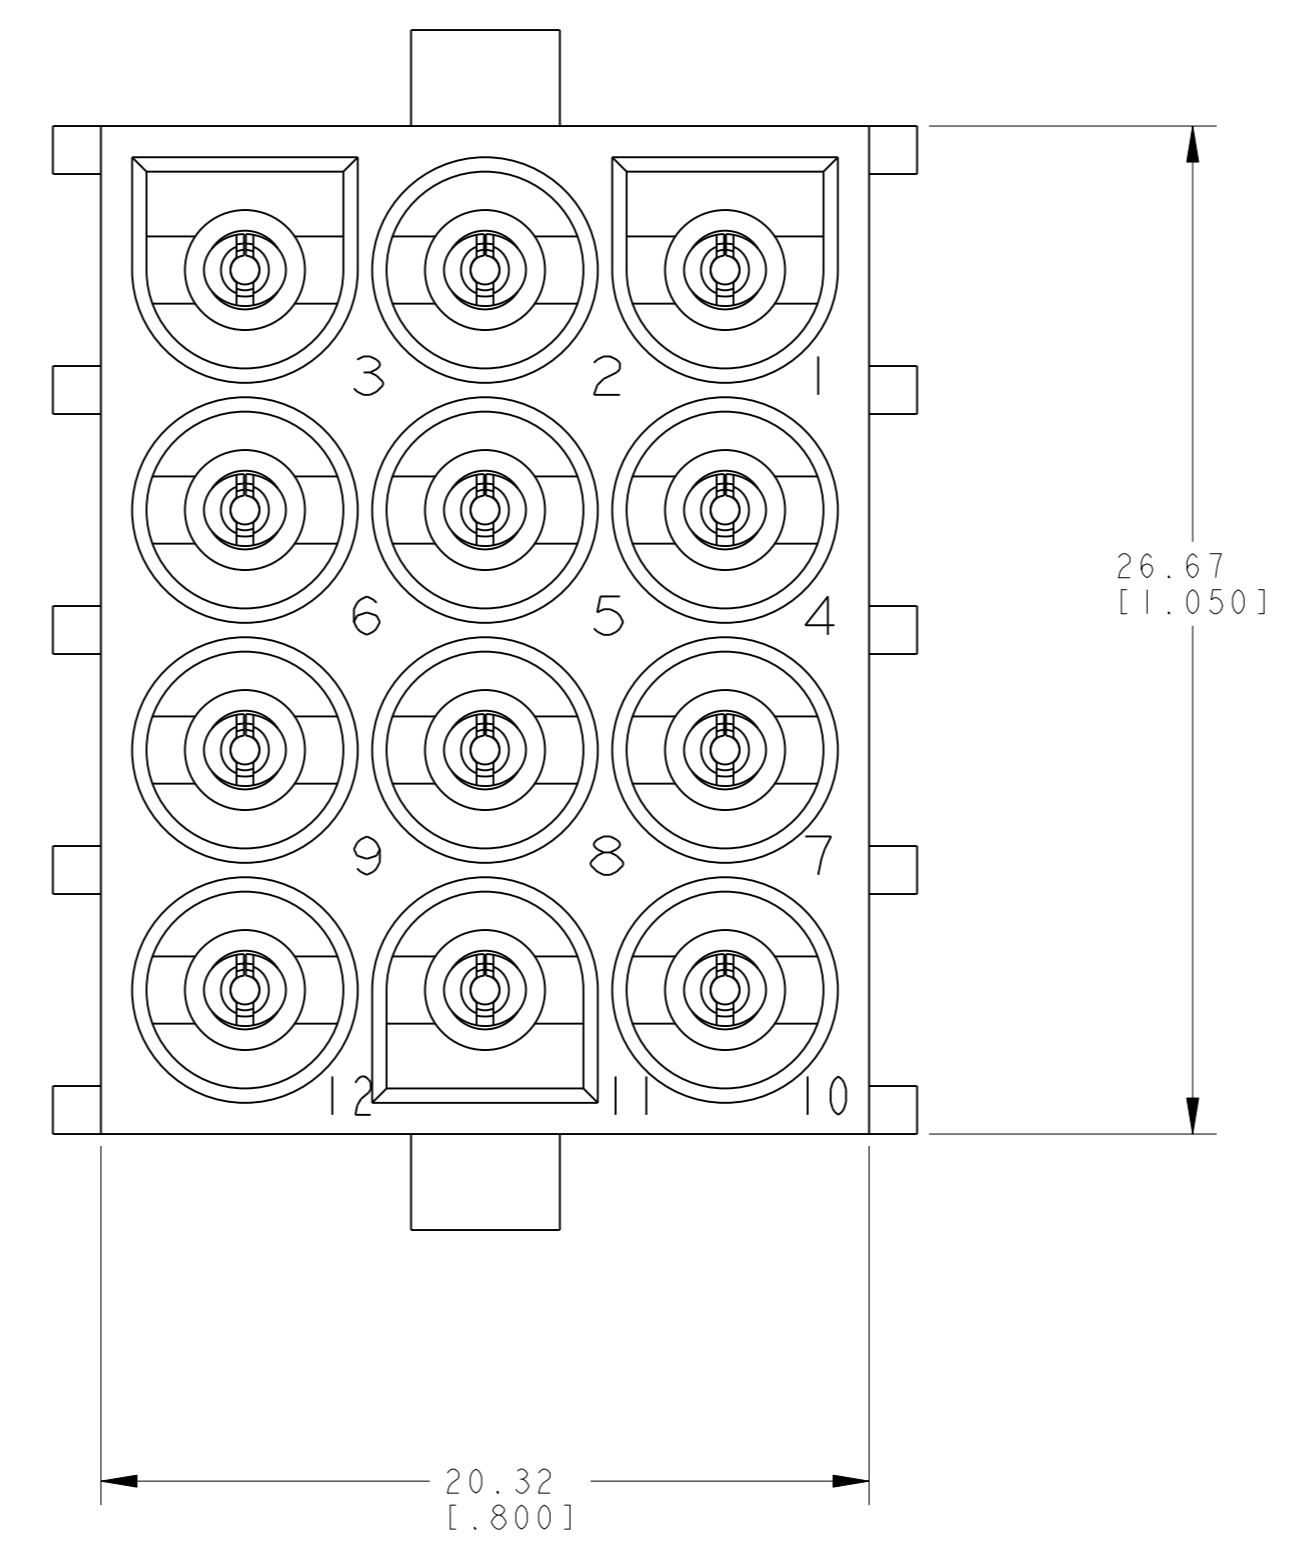
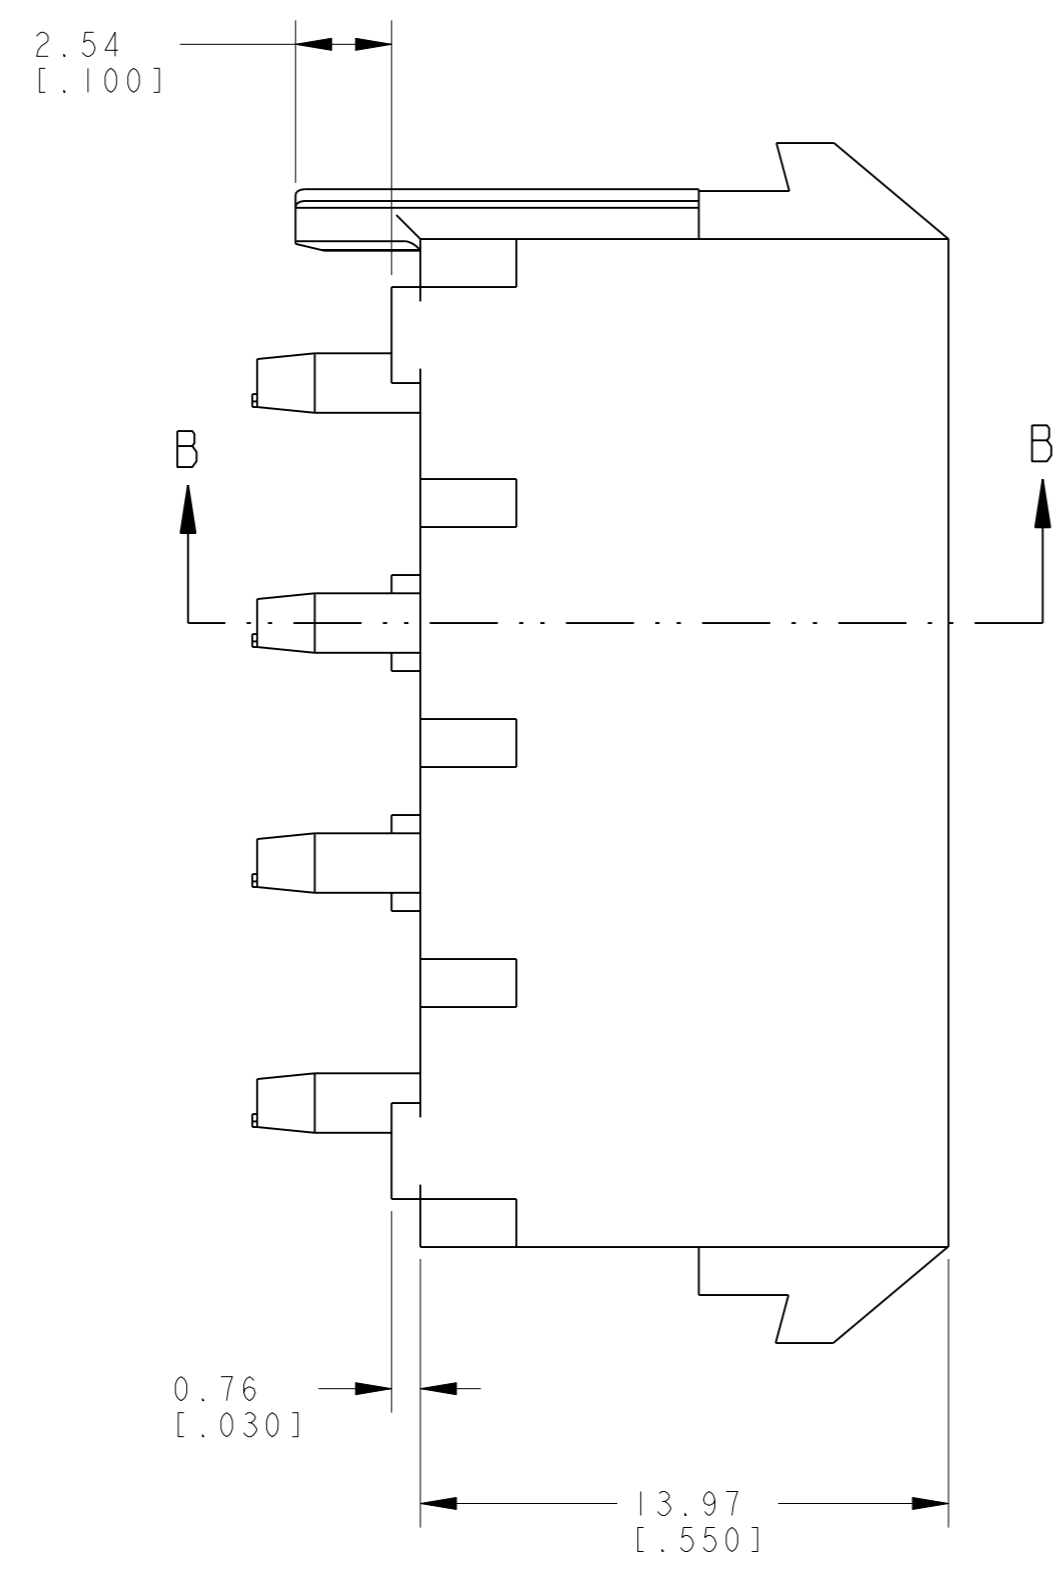
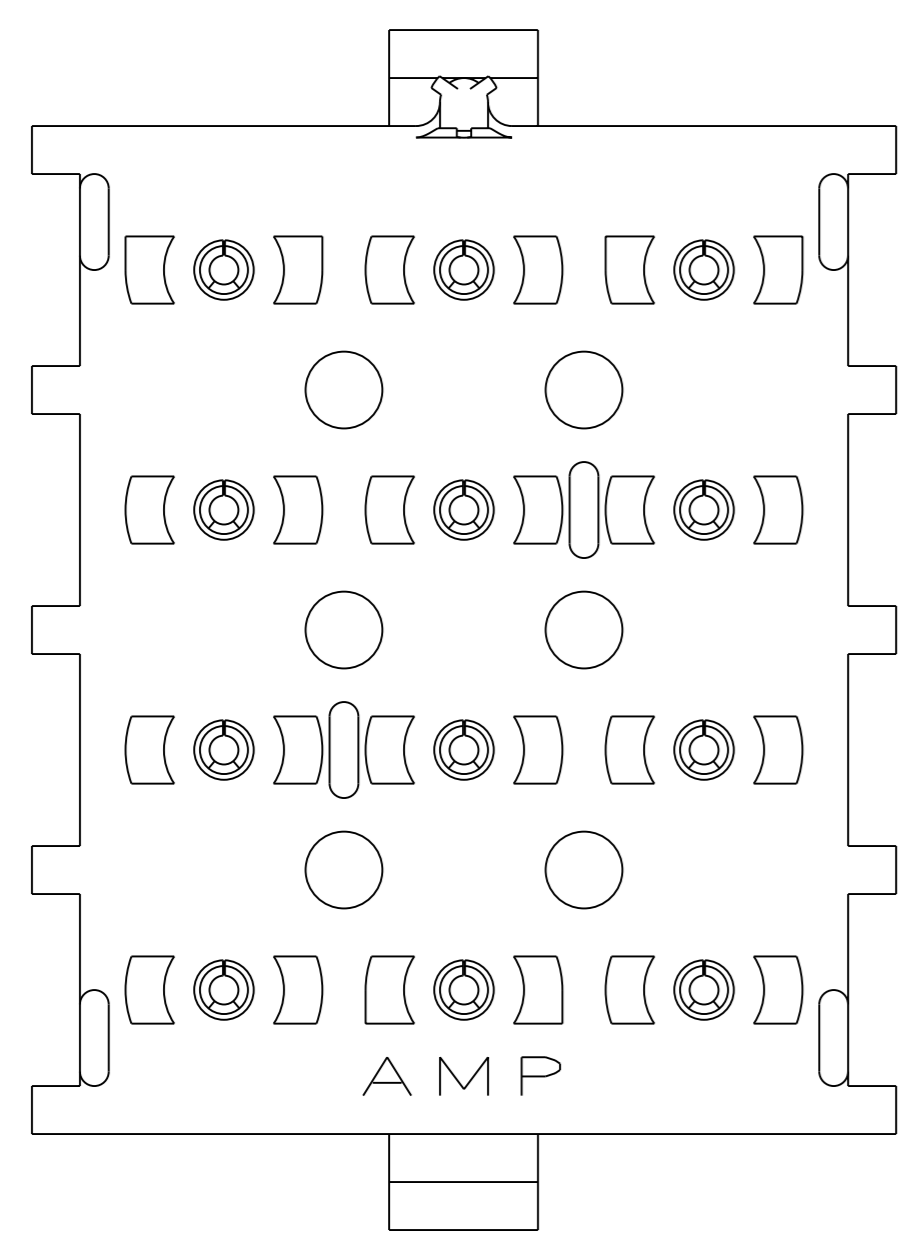
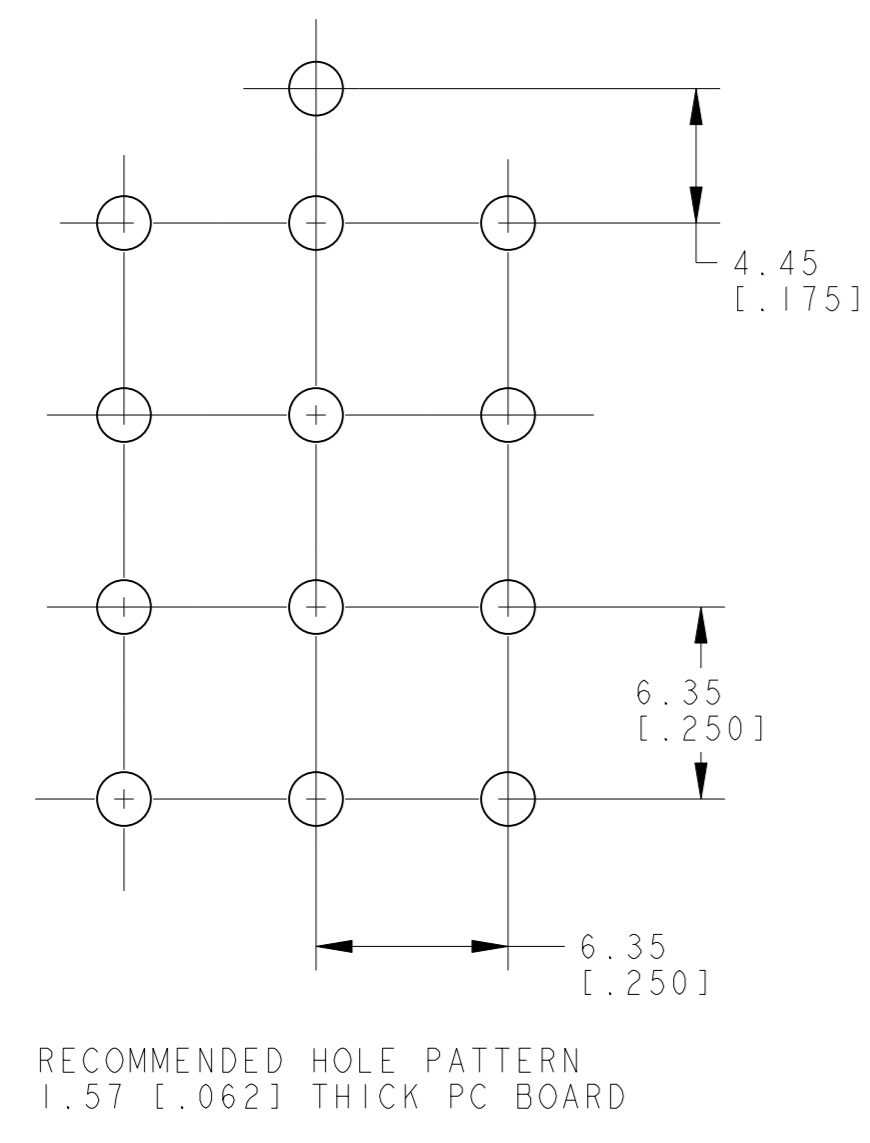


LOC	DIST	REVISIONS			
F	LTR	DESCRIPTION	DATE	DWN	APVD
P		REVISED PER 0G3B-1208-04	140CT05	KW	SR

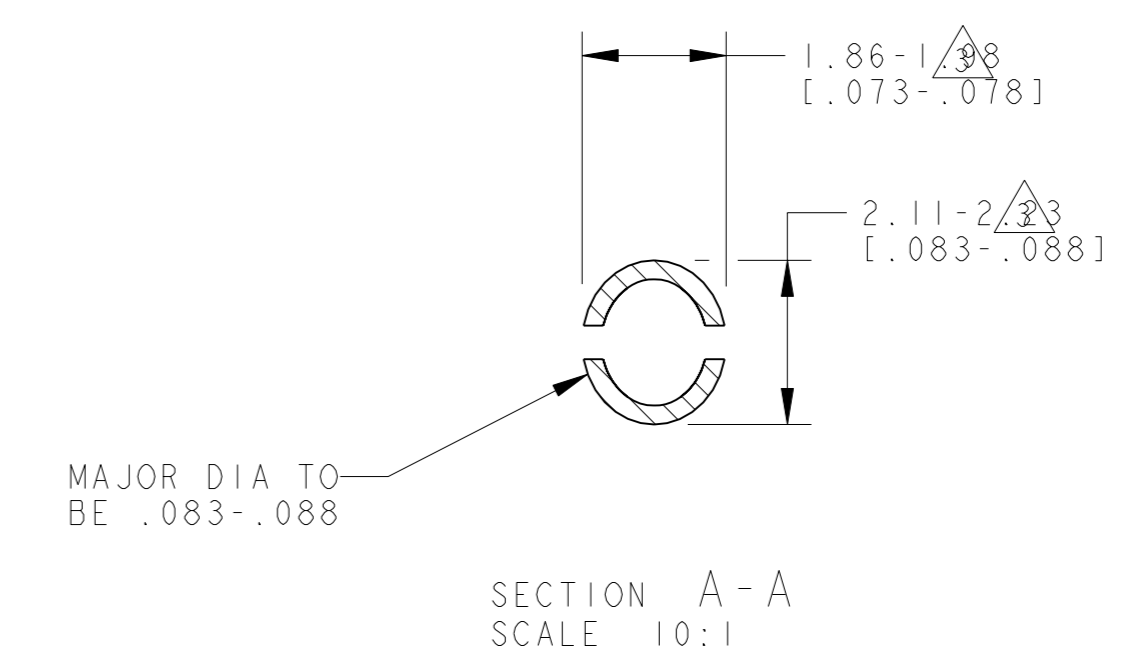

1. PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- △ CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND TIN LEAD ON SOLDER TAIL END.
- △ 3 CIRCUIT IDENTIFICATION ON CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- △ 4 CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

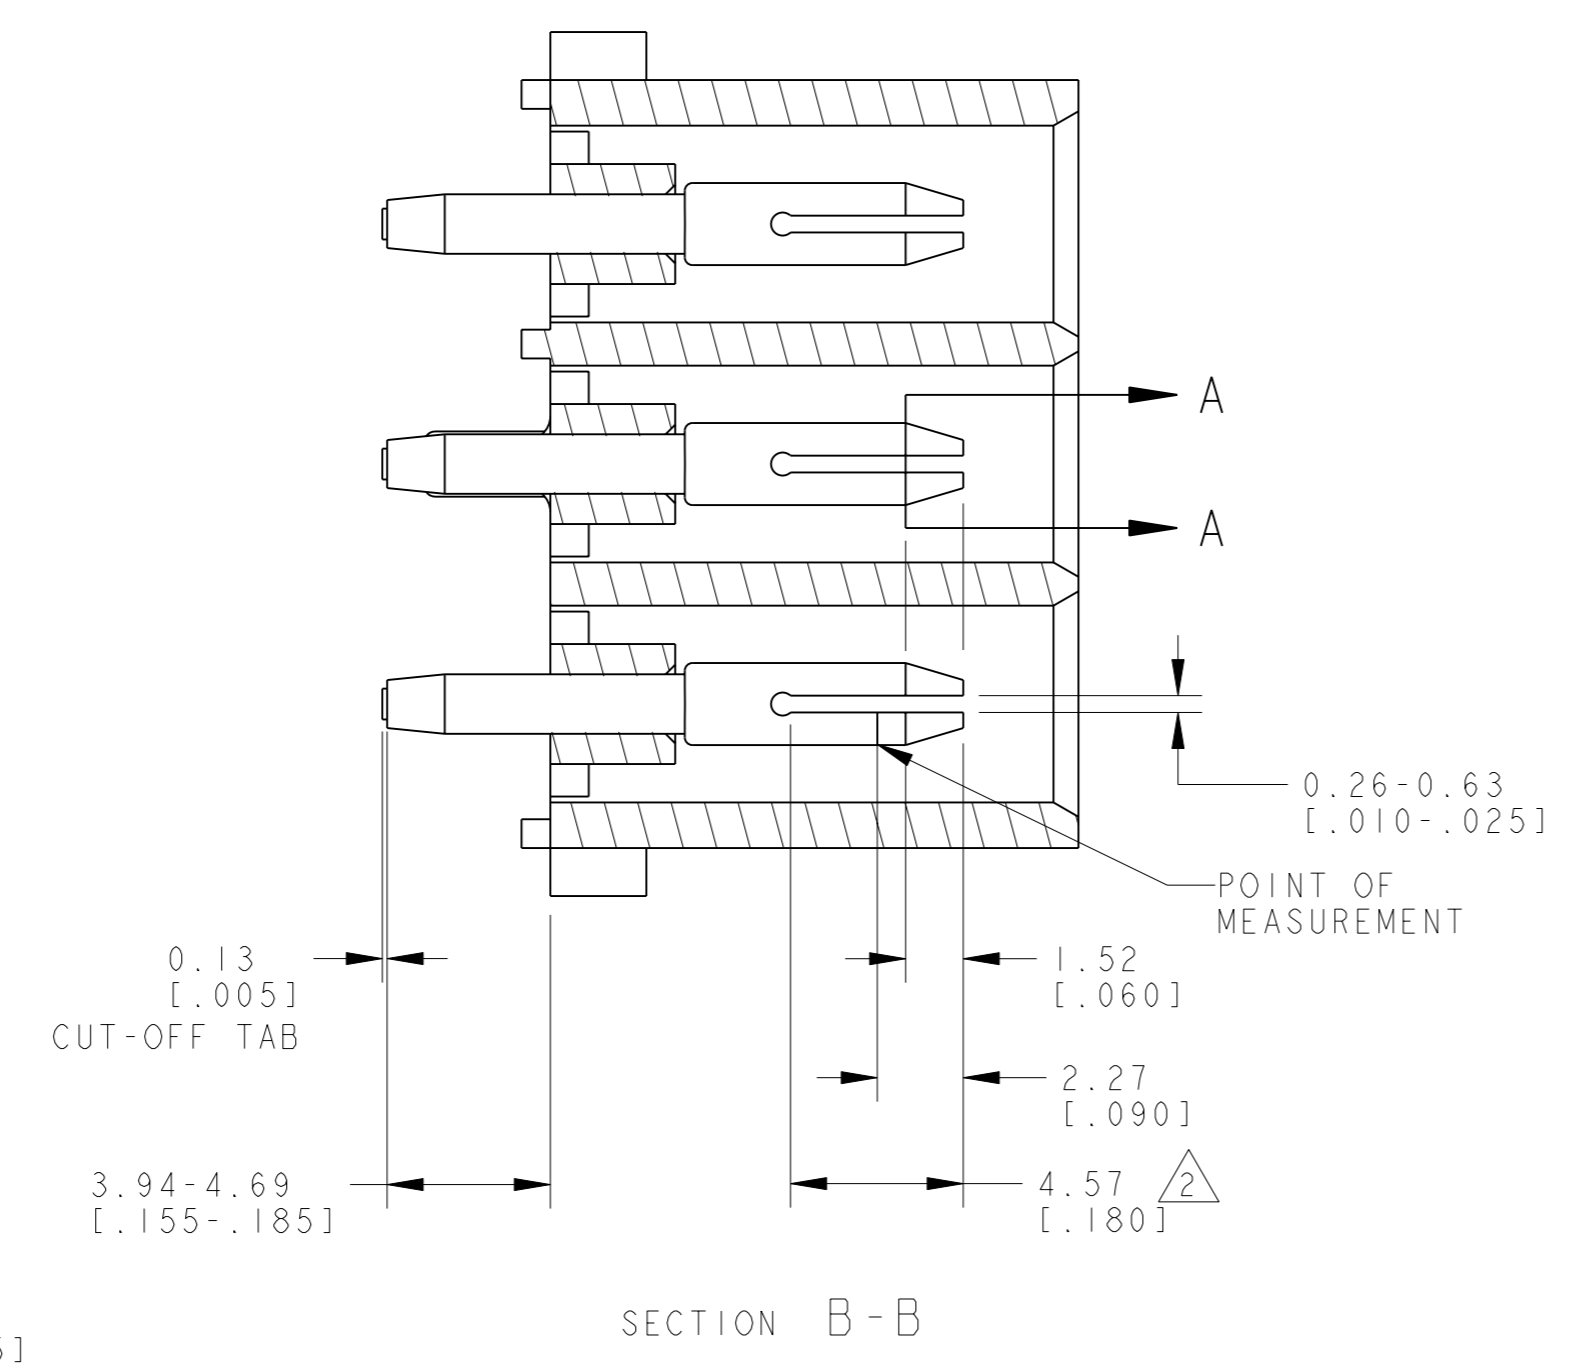

METRIC

MATERIAL	FINISH	MATERIAL	COLOR	PART NO
PH BRZ	PRE-TIN	NYLON, 94V-0	BLACK	1-641974-1
PH BRZ	GOLD △4	NYLON, 94V-0	WHITE	641974-3
PH BRZ	GOLD △2	NYLON, 94V-0	WHITE	641974-2
PH BRZ	PRE-TIN	NYLON, 94V-0	WHITE	641974-1

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN	
INCHES		0 PLC ±	1 PLC ±	K. WHITAKER	140CT2005
		2 PLC ±	3 PLC ±	S. RIDGILL	140CT2005
		4 PLC ±	ANGLES 40° 30'	S. RIDGILL	140CT2005
MATERIAL				NAME	
FINISH				tyco Electronics	
CUSTOMER DRAWING				Harrisburg, PA 17105-3608	
SCALE				DRAWING NO	
5:1				A 00779C=641974	
SHEET				RESTRICTED TO	
1 OF 1				P	