

Customer Information Sheet

DRAWING No.: S1741-46R

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)


NOT TO SCALE

THIRD ANGLE PROJECTION



ALL DIMENSIONS IN mm

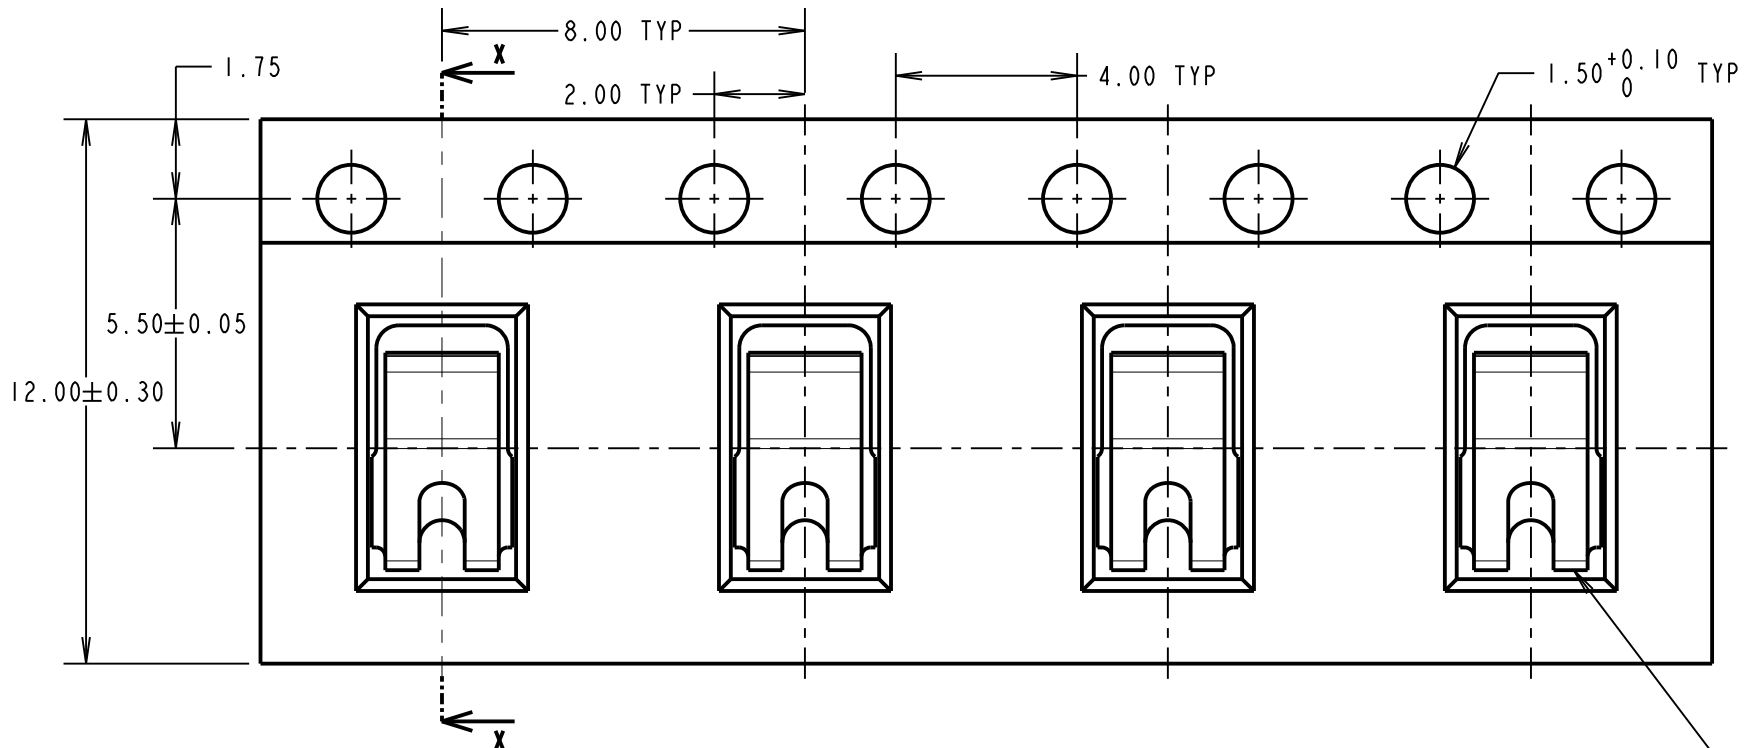


REEL DETAILS

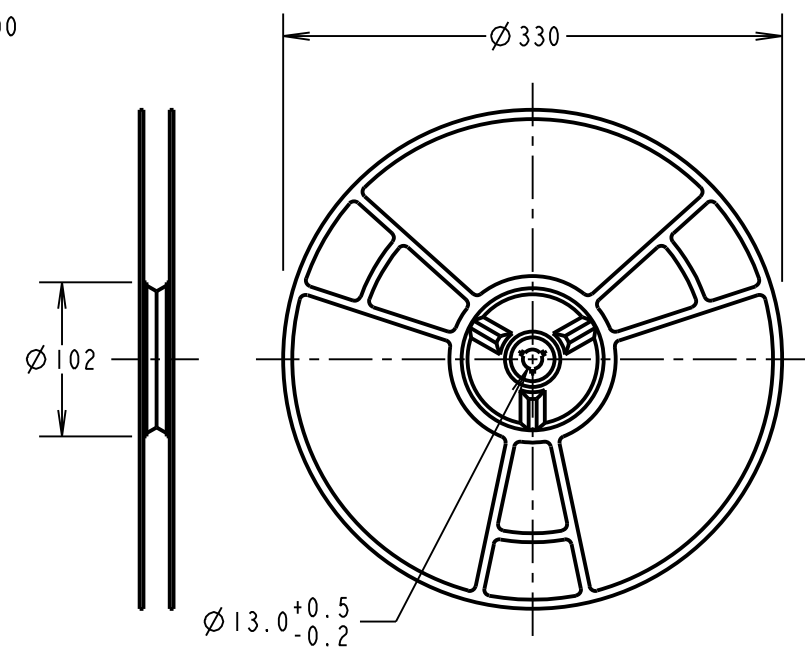

SINGLE COMPONENT DIMENSIONS

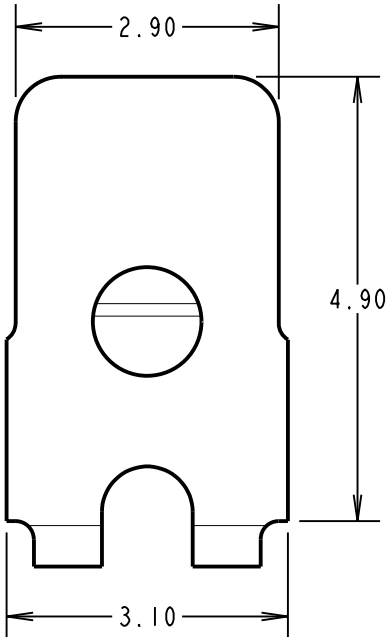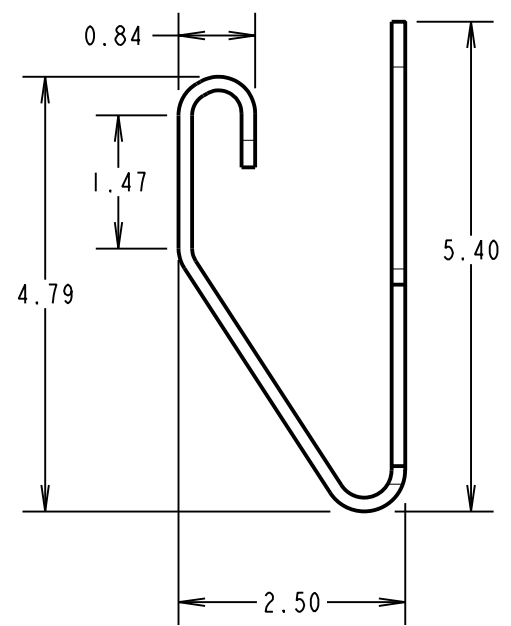


RECOMMENDED PAD LAYOUT

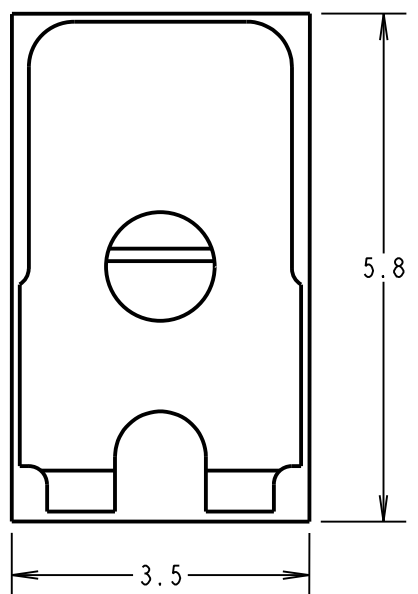


NOTES:

1. QUANTITY PER REEL = 2500.
2. THIS PRODUCT IS TAPED AND REELED IN ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).
3. FOR DETAILS OF CONTACT SEE DRAWING S1741-46.

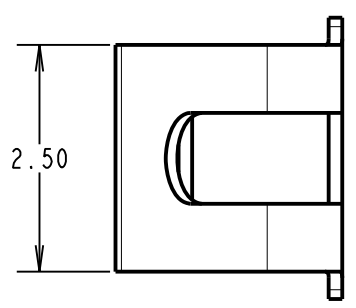

COMPONENT SPECIFICATION:
MATERIAL = PHOSPHOR BRONZE
FINISH = 4u BRIGHT 100% TIN OVER 2u NICKEL
RECOMMENDED WORKING HEIGHT = 1.75mm / MIN FORCE = 1.5N
MINIMUM WORKING HEIGHT = 1.50mm / MAX FORCE = 3.0N
MAXIMUM PERMANENT SET = 0.25mm

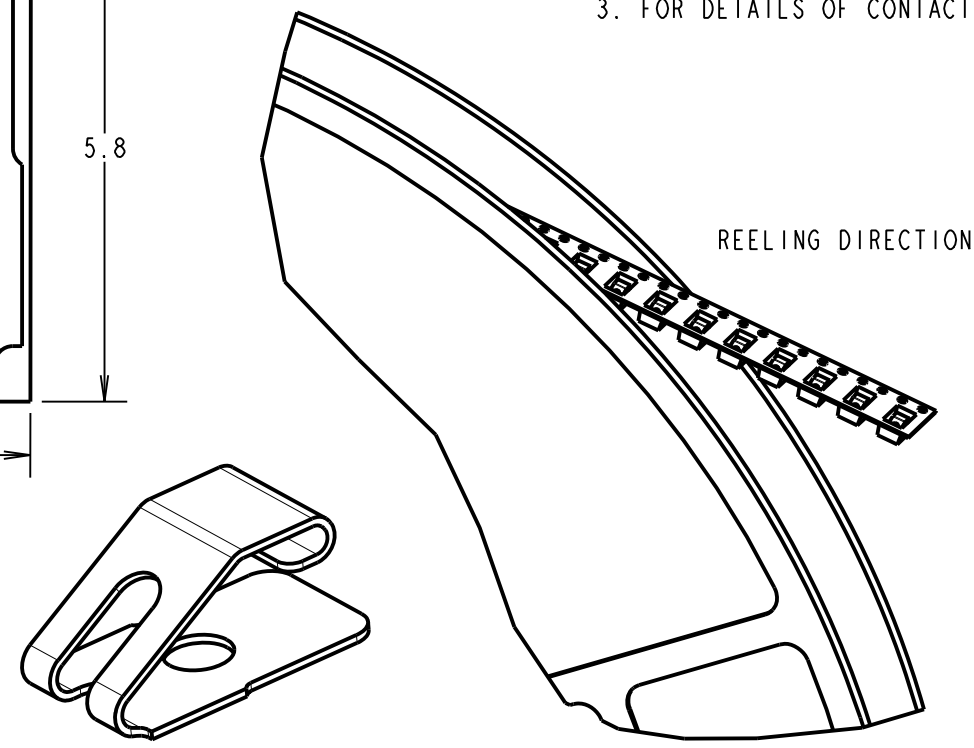

RA	I	22.11.11	11553
NAME	ISS.	DATE	C/NOTE
APPROVED: R.ADDE			
CHECKED: M.G.PLESTED			
DRAWN: N.CODLING			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE:
S1741-46 SMT CONTACT
IN TAPE AND REEL
DRAWING NUMBER:
S1741-46R
SHT 2 OF 2