


PART NO.
SEE CHART
DWG. NO.
SD-92321-001

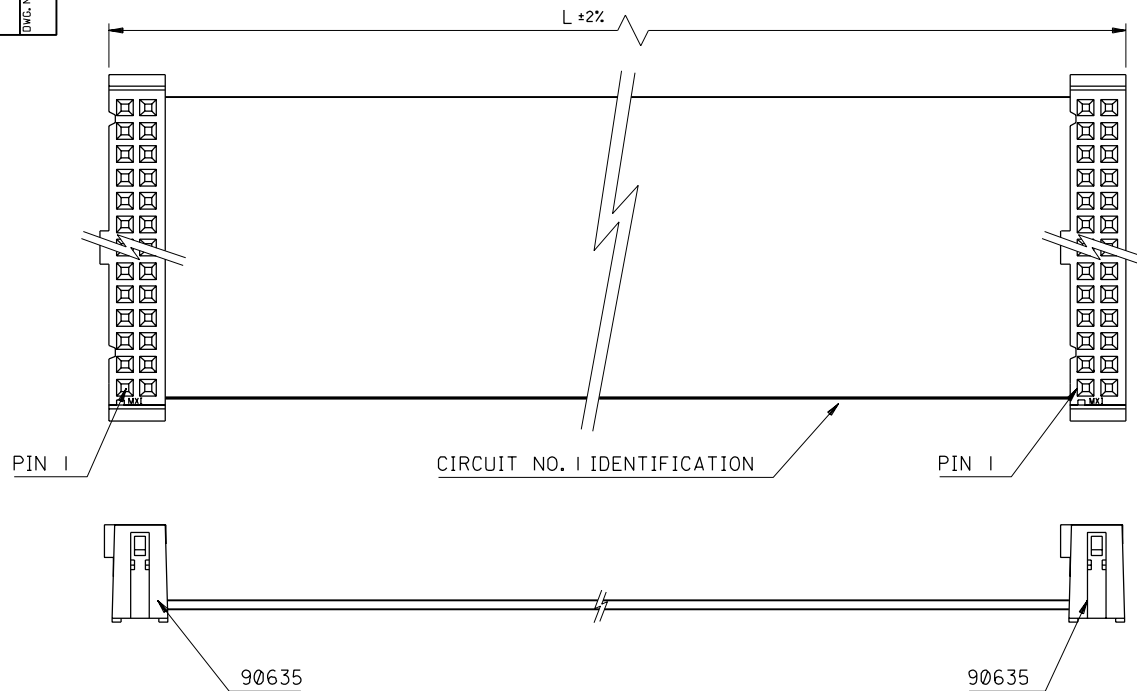

90635 CONNECTOR	
CIRCUIT SIZE	
10	
14	
16	
20	
26	
34	
40	
50	

CABLE DETAILS:

28 AWG , 1.27 MM PITCH , 7 STRANDS WITH TINNED COPPER ,
GREY PVC INSULATION WITH A COLOURED POLARITY STRIPE
INDICATING CIRCUIT NO. 1 , UL 2651.

PLATING DETAILS:

15U" GOLD FLASH PLATING.

NOTES:

1. SEE PRODUCT SPECIFICATIONS PS-99020-0015.
2. SEE CABLE SPECIFICATION ES-99027-0006.
3. HARNESSES WILL BE 100% ELECTRICALLY TESTED FOR SHORTS AND DISCONTINUITIES.

ORDERING INFORMATION

92321-****

CIRCUIT SIZE
LENGTH L IN CENTIMETRES

LENGTHS AVAILABLE FROM 5 CM TO 50 CM, IN STEPS OF 5.
05, 10, 15, 20, 25, 30, 35, 40, 45 & 50CM

e.g. 92321-1410 = 14 CIRCUIT
WITH LENGTH L OF 10 CM.

ORIGINAL RELEASE EC NO. 2000-0896 DRWN: D.RYAN CHK: / / APPR: / /	DESCRIPTION MAJOR CRITICAL C	QUALITY SYMBOLS	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 2 : 1	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION	DIMENSIONS: ☐ mm ☐ INCH ☒ mm ONLY		SHT	REV					
			mm	INCH												
AI	REV	DESCRIPTION	4 PLACES	±0.	±.	DRAWN BY & DATE D.RYAN 00/03/15		TITLE: QF50 TO QF50 STANDARD ASSEMBLIES								
			3 PLACES	±0.	±.	CHECKED BY & DATE BENRIGHT 00/03/15		MOLEX INCORPORATED								
			2 PLACES	±0.	±.	APPROVED BY & DATE MWILHITE 00/03/15										
			1 PLACE	±0.	±.	CAD FILENAME										
			ANGULAR: ± 1/2 °		MATERIAL NO. SEE CHART		DRAWING NO. SD-92321-001		SHEET NO. 1 OF 1							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.													