

1 Products affected

| Product hierarchy no. * | | | | Part no. | SBU | Type / Description | Customer part no. |
|-------------------------|-----|-----|------------|----------------|--------------------------------|--------------------|-------------------|
| SBU | PG | PGU | Type | | | | |
| 02 | 005 | 016 | 0000001103 | See list below | Power Entry Modules w/o Filter | 6200 | |

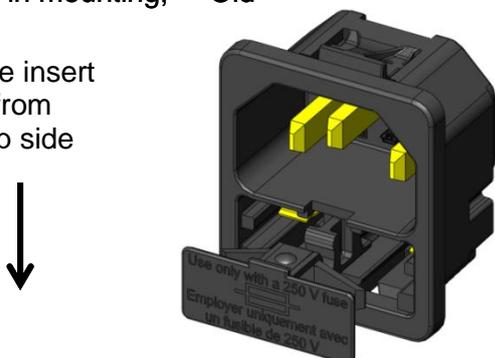
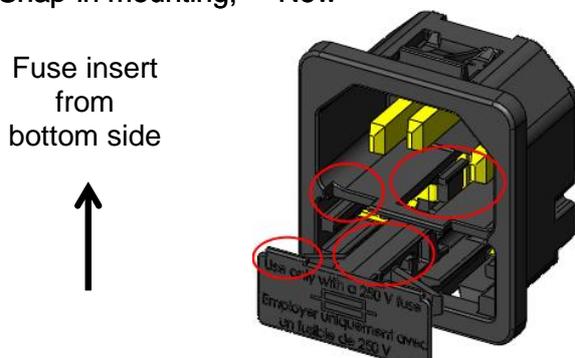
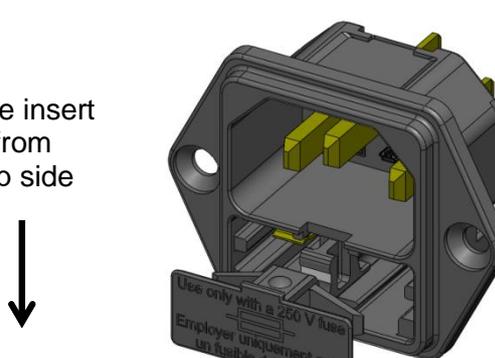
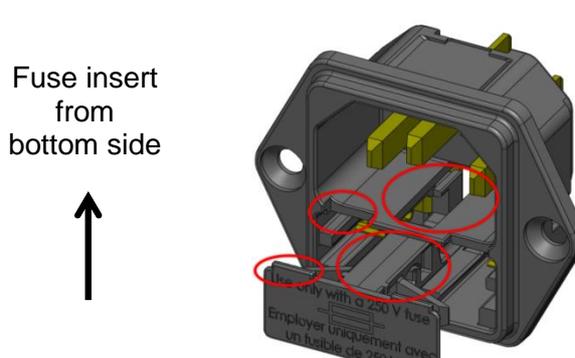
*SBU (2-digit) / PG (3-digit) / PUG (3-digit) / Type (10-digit)

| List of part numbers affected | | | | |
|-------------------------------|-----------|-----------|-----------|-----------|
| 6200.2100 | 6200.2200 | 6200.2300 | 6200.4110 | 6200.4112 |
| 6200.4115 | 6200.4120 | 6200.4125 | 6200.4130 | 6200.4210 |
| 6200.4212 | 6200.4215 | 6200.4220 | 6200.4225 | 6200.4230 |
| 6200.4310 | 6200.4312 | 6200.4315 | 6200.4320 | 6200.4325 |
| 6200.4330 | 6200.9100 | 6200.9200 | 6200.9300 | |

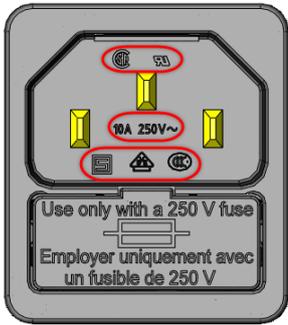
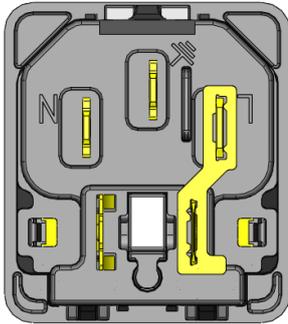
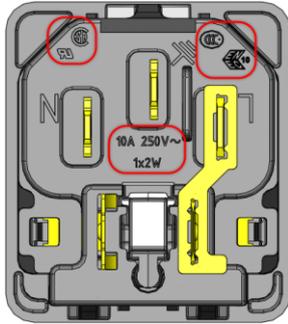
2 Type of change

1. V-Lock cord retaining integrated as standard
2. Material change
3. Modification of approval marks

3 Detailed description of change

| Old product appearance | | New product appearance | |
|--|--|------------------------|--|
| <ul style="list-style-type: none"> - Slot for V-Lock cord retention - Fuse assembling from opposite side - Fusedrawer has two latches on the side to pull-out the fusedrawer, until now is only one latch | | | |
| <p>Snap-in mounting; Old</p> <p>Fuse insert from top side</p>  | <p>Snap-in mounting; New</p> <p>Fuse insert from bottom side</p>  | | |
| <p>Screw-on mounting; Old</p> <p>Fuse insert from top side</p>  | <p>Screw-on mounting; New</p> <p>Fuse insert from bottom side</p>  | | |

| Product Change Notification | | | | | PCN 6200 | | |
|-----------------------------|---------------|--------------|-------------|-----------------|----------|--------|-------------|
| owner | creation date | release date | released by | change order no | rev | page | D10-004-681 |
| schaidro | 2016-05-30 | 2016-12-06 | buerglal | 2011605 | A | 1 of 2 | |

| Old product approval marks | New product approval marks |
|---|---|
| <p>Picture shows snap-in mounting, change also applies to screw version. All approval and rating marks are new on the rear side</p> | |
| <p>Old;</p>   | <p>New;</p>   |

4 Reason of change

- V-Lock cord retaining implemented as a standard feature
- VDE mark replaced by ENEC10
- Product improvement to fulfil the enhanced glow wire requirements according to the updated standard IEC 60127-6 and the standard IEC 60335-1 for appliances in unattended use.

5 Release date

The change will be rolled-out starting ww 47/2016 and lasts approx. 8 months depending on the variant.

6 Impact of change and recommended action

| | | |
|-----------------|-----|--|
| Form | Yes | - Slot (notch) for V-Lock cord retention - Insertion of the fuse is turned - Fusedrawer has 2 latches sideways |
| Fit | No | No dimensional change |
| Function | Yes | Compatible with V-Lock cordsets |
| Production Site | No | No change of the production site |
| Product Label | Yes | VDE mark replaced by ENEC10 |
| Customer Action | No | Notification only |

7 Reference Documents / Attachments

| Kind of document | Remarks |
|----------------------|-----------|
| 6200 | Datasheet |

| Product Change Notification | | | | | | PCN 6200 | |
|-----------------------------|---------------|--------------|-------------|-----------------|-----|----------|-------------|
| owner | creation date | release date | released by | change order no | rev | page | D10-004-681 |
| schaidro | 2016-05-30 | 2016-12-06 | buerglal | 2011605 | A | 2 of 2 | |