


# GSD

M55339/13-00492

**REVISIONS**


ISSUE	CHANGES
7	CN 35618 D KH 01/09/95

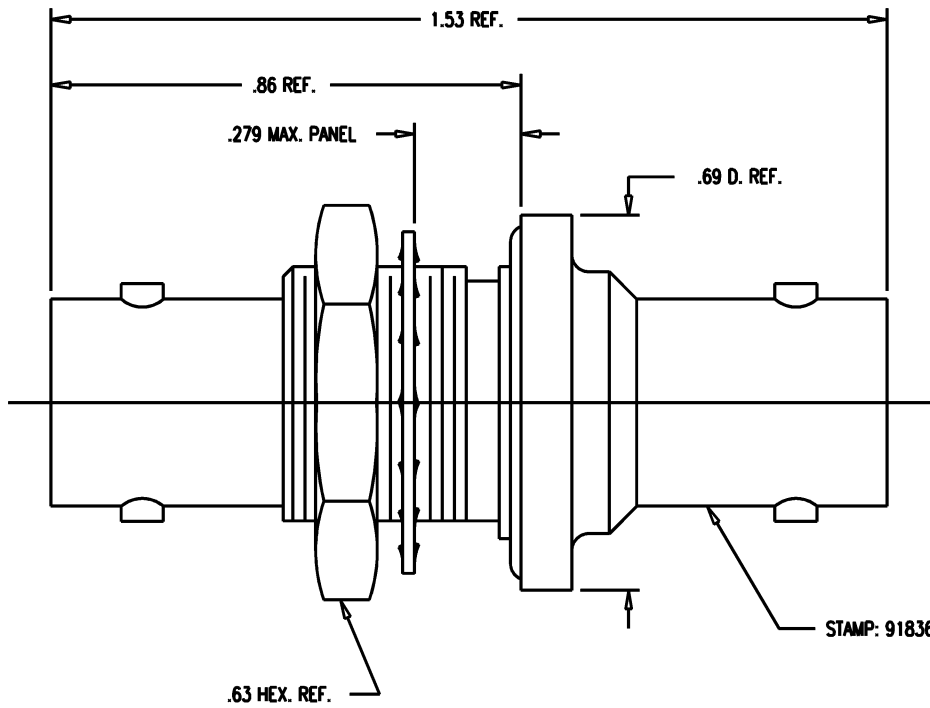

STAMP: 91836 M55339/13-00492  
759-2 XXXX (DATE CODE)

**NOTES:**

1. INTERFACE PER MIL-STD-348, FIG. 301-2.
2. MATERIALS:  
 INSULATORS: TEFLON, ASTM-D-4894  
 GASKET: SILICONE RUBBER, Z2-R-765  
 K-GRIP SLEEVE: COMMERCIAL BRONZE, ASTM-B-140  
 LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103  
 CENTER CONTACT: BER. COP., ASTM-B-196  
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:  
 CENTER CONTACT: GOLD PLATE PER MIL-G-45204  
 ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:  
 NOMINAL IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: DC TO 4 GHZ  
 WORKING VOLTAGE: 500 VRMS
5. ENVIRONMENTAL  
 UNIT WILL SHOW NO LEAKAGE AT 50 P.S.I.  
 LEAKAGE RATE SHALL NOT EXCEED  $1 \times 10^{-7}$  cc/sec OF  
 TRACER GAS AT ATMOSPHERIC PRESSURE



MOUNTING HOLE

# GSD

KAM6258

SCALE 4:1	
APPROX SURFACE AREA	
759-2	
USED ON	
REF:	
ADAPTER, F-F, BULKHEAD, HERMETIC SEAL, BNC	
DRAWN KH	DATE/01/95
DESIGN MJB	DATE/02/95
APPR.	DATE

**KINGS**  
ELECTRONICS CO., INC.  
TUCKAHOE, NEW YORK 10707

M55339/13-00492