

**1 Products affected**

Product hierarchy no. *				Part no.	SBU	Type / Description	Customer part no.
SBU	PG	PGU	Type				
01	002	012	0000000530	0031.3803	Circuit protection	FAC socket	n/a
				0031.3804		FAC socket	n/a
				0031.3801		FAC 6.3x32	n/a
				0031.3821		FAC 5x20	n/a
				0031.3822		FAC 6.3x32	n/a
				0031.3823		FAC finger-grip 6.3x32	n/a
				0031.3824		FAC finger-grip 5x20	n/a

\*SBU (2-digit) / PG (3-digit) / PGU (3-digit) / Type (10-digit)

**2 Type of change**


- Change of material
- Modified label
- Change of marking
- Improved voltage rating
- Improved electrical contact

**3 Detailed description of change**

The new materials fulfil the enhanced glow wire requirements according to the updated standard IEC 60127-6:2014 and are free of halogenated flame retardant and red phosphorus.

Old product approval		New product approval	
<b>UL 512</b> 16A, 400V <b>CSA C22.2 no. 39</b> 16A, 250V <b>IEC 60127-6 (VDE) Cert. 6945</b> 3.2W, 10A, 250V AC (6.3x32mm) 2.5W, 10A, 250V AC (5x20mm)		<b>UL 4248-1 - CSA C22.2 no. 4248.1</b> 16A, 600V AC or DC  <b>IEC 60127-6:2014 (VDE) Cert. 40045994</b> 3.2W, 10A, 250V AC (6.3x32mm) 2.5W, 10A, 250V AC (5x20mm)	
Old label		New label	
Old product marking		New product marking	

Product Change Notification					FAC improvement		
owner	creation date	release date	released by	change order no	rev	page	D10-013-731
dislercy	2017-02-09	2017-06-02	nowakfr	2010874	A	1 of 2	

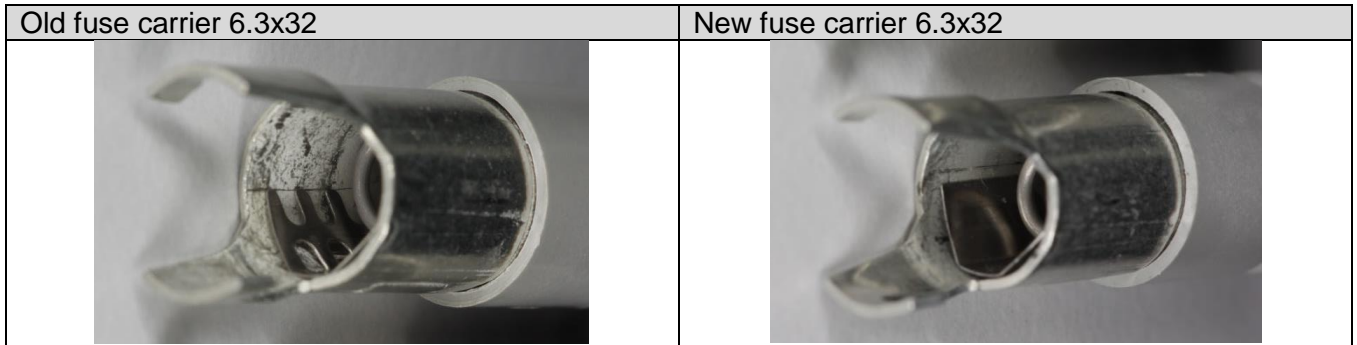

#### 4 Reason of change

Product improvement to fulfil the enhanced glow wire requirements according to the updated standard IEC 60127-6:2014.

#### 5 Release date

The change will be rolled-out starting ww 23/2017 (Date code 1723 or higher on label) and lasts approx. until October 2017, depending on stock.

#### 6 Impact of change and recommended action

Form	Yes	Inscription on socket, holding spring and isolation material changed
Fit	No	No change for dimension
Function	Yes	Rating enhancement acc. to UL
Production Site	No	No change of the production site
Product Label	Yes	Approvals and configuration code on label
Packaging	No	No change in packaging

#### 7 Reference Documents / Attachments

Kind of document	Remarks
<a href="#">Data sheet</a>	Fuseholder FAC

Product Change Notification					FAC improvement		
owner	creation date	release date	released by	change order no	rev	page	D10-013-731
dislercy	2017-02-09	2017-06-02	nowakfr	2010874	A	2 of 2	