

1 Products affected

Product hierarchy no. *				Part no.	SBU	Type / Description	Customer part no.
SBU	PG	PGU	Type				
01	002	012	0000000529	0031.3573	Circuit protection	FAU socket	n/a
				0031.3577		FAU socket	n/a
				0031.3572		FAU 6.3x32	n/a
				0031.3571		FAU 5x20	n/a
				0031.3581		FAU 6.3x32	n/a
				0031.3583		FAU finger-grip 6.3x32	n/a
				0031.3584		FAU finger-grip 5x20	n/a

*SBU (2-digit) / PG (3-digit) / PGU (3-digit) / Type (10-digit)

2 Type of change


- Change of material
- Modified label
- Change of marking
- Improved voltage rating
- Improved electrical contact

3 Detailed description of change

The new materials fulfil the enhanced glow wire requirements according to the updated standard IEC 60127-6:2014 and are free of halogenated flame retardant and red phosphorus.

Old product approval	New product approval
UL 512 16A, 250V CSA C22.2 no. 39 16A, 250V IEC 60127-6 (VDE) Cert. 6946 3.2W, 10A, 250V AC (6.3x32mm) 2.5W, 10A, 250V AC (5x20mm)	UL 4248-1 - CSA C22.2 no. 4248.1 16A, 600V AC or DC IEC 60127-6:2014 (VDE) Cert. 40045994 3.2W, 10A, 250V AC (6.3x32mm) 2.5W, 10A, 250V AC (5x20mm)
Old label	New label
Old product marking	New product marking

Product Change Notification					FAU improvement		
owner	creation date	release date	released by	change order no	rev	page	D10-013-730
dislercy	2017-02-09	2017-06-02	nowakfr	2010875	A	1 of 2	

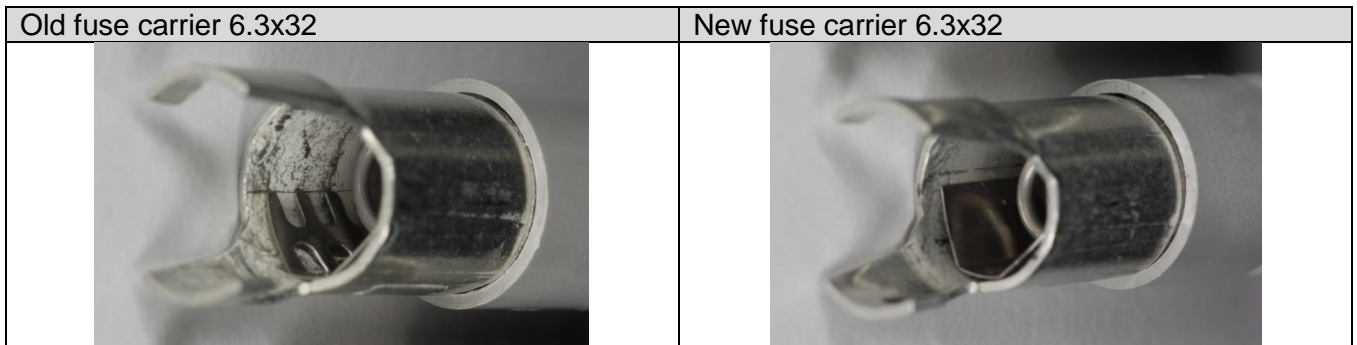

4 Reason of change

Product improvement to fulfil the enhanced glow wire requirements according to the updated standard IEC 60127-6:2014.

5 Release date

The change will be rolled-out starting ww 23/2017 (Date code 1723 or higher on label) and lasts approx. until October 2017, depending on stock.

6 Impact of change and recommended action

Form	Yes	Inscription on socket, holding spring and insulation material changed
Fit	No	No change for dimension
Function	Yes	Rating enhancement acc. to UL
Production Site	No	No change of the production site
Product Label	Yes	Approvals and configuration code on label
Packaging	No	No change in packaging

7 Reference Documents / Attachments

Kind of document	Remarks
Data sheet	Fuseholder FAU

Product Change Notification					FAU improvement		
owner	creation date	release date	released by	change order no	rev	page	D10-013-730
dislercy	2017-02-09	2017-06-02	nowakfr	2010875	A	2 of 2	