

multicomp	PART NO.			REVISIONS						
		ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	1.0	RELEASED	DO	01/04/14	ER	01/04/14	ER	01/04/14



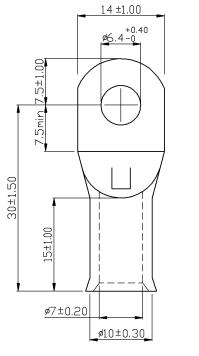

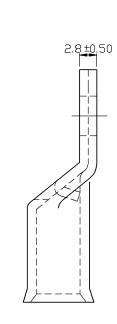

Dimensions : Millimetres

Specifications:

Maximum Electric Current

Wire Range Surface Treatment Thickness : AWG 4 Amp 25 : 4AWG (25mm²) : Tin Plated : 1.5mm

Part Number Table

Description	Part Number				
Crimp Terminal, Tubular Lug, 25-M6, Flared	MC000753				

www.element14.com www.farnell.com www.newark.com

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negli- gence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group is liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Famell plc 2012.	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:						
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE	DO	01/04/14		Non-Insulated Copper Tubular Lug, Flared					
		CHECKED BY:	DATE:	SIZE	DWG NO.	ELECTR		ONIC FILE	REV	
		ER	01/04/14	A4	MC000753-01		MC000753		1.0	
		APPROVED BY:	DATE:	SCALE: NTS				SHEET: 1 of 1		
		ER	01/04/14			0.0.wi.: mr	U.O.M.: mm			