



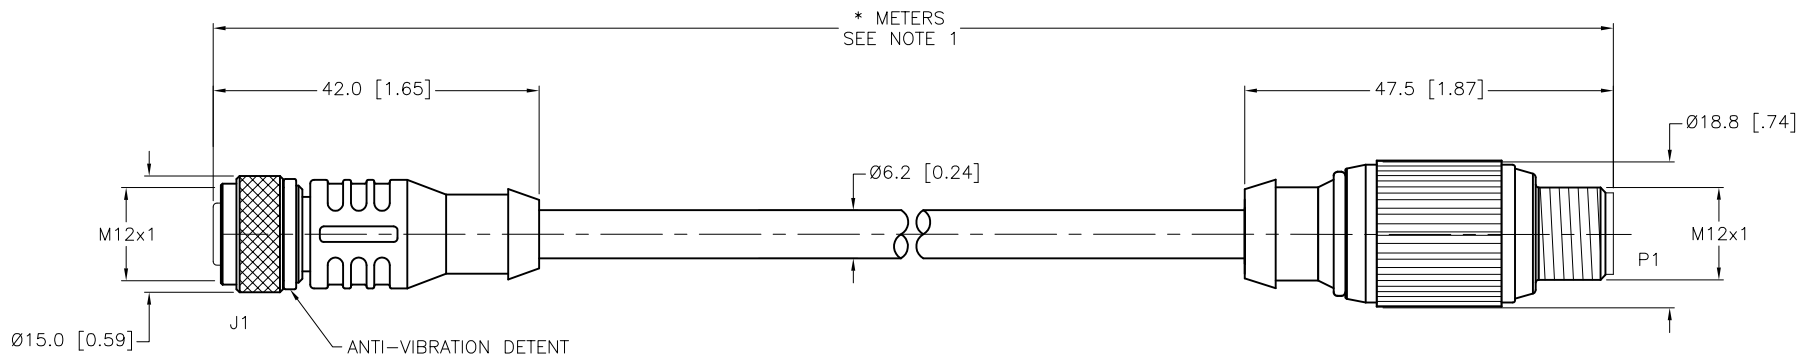


FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p> 	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p> 	CONTACT CARRIER MATERIAL	TPU or NYLON
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW
		CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
		NUMBER OF CONDUCTORS [AWG]	4x18 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K




CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S101" DESIGNATES FLEXLIFE-20 CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

<div>50-69mm±3.0mm</div> <div>70-100mm±4.0mm</div> <div>OVER 100mm±5.0mm</div> <div>*UNLESS OTHERWISE SPECIFIED</div>		RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div></div>		<div>TURCK INC</div> <div>High Technology Sensors and Automation Controls</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>	
NOTES:		1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.		2. "/S101" DESIGNATES FLEXLIFE-20 CABLE.		MATERIAL		DESCRIPTION	
						SEE SPECIFICATIONS		RKC 4.4T-*--RSG 4.4T/S101	
						FINISH		IDENTIFICATION NO.	
						SEE SPECIFICATIONS		REV	
						CONTACT TURCK FOR MORE INFORMATION		F	
						UNIT OF MEASUREMENT		FILE: 777021821	
						MILLIMETER [INCH]		SHEET 1 OF 1	
						DO NOT SCALE THIS DRAWING			
F		UPDATE CONDUCTOR INSULATION MATERIAL		CBM		11/02/12		40127	
REV		DESCRIPTION		BY		DATE		ECO NO.	