



Notification of Product Modification

Product Line:	Slim Jack	Part No:	NRJ6HM-1
Piece Part:	Nose and sleeve contact	Part No:	
Engineering Change Request:	E08-011	Date:	22.8.2008
Engineering Change Execution:		Date:	04.6.2009
Comments:	Development Request E08-011		
Affected products:	NRJ4HM-1, NRJ4HM-1-AU NRJ6HM-1, NRJ6HM-1-AU		
First shipment of modified Products:	NRJ6HM-1-AU NRJ6HM-1	second week of June, date code B24 middle of July, date code B30	


Engineering Change Notice

New spring loaded sleeve contact incorporating normalling function (SN contact).

Modified metal nose which makes permanent contact between nose (front plate) and sleeve contact (S). Front panel connection via ribs instead of bent barbs.

Changed material of nose from brass to zinc diecast ZnAl4Cu1, nickel plating remain the same.

Line drawing please find enclosed

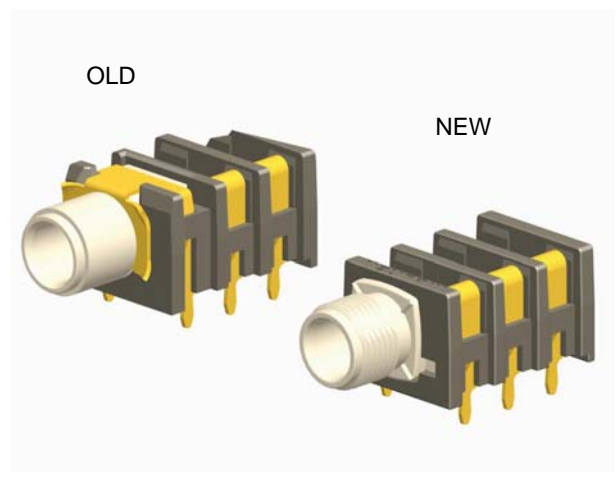

Normalling circuit

