

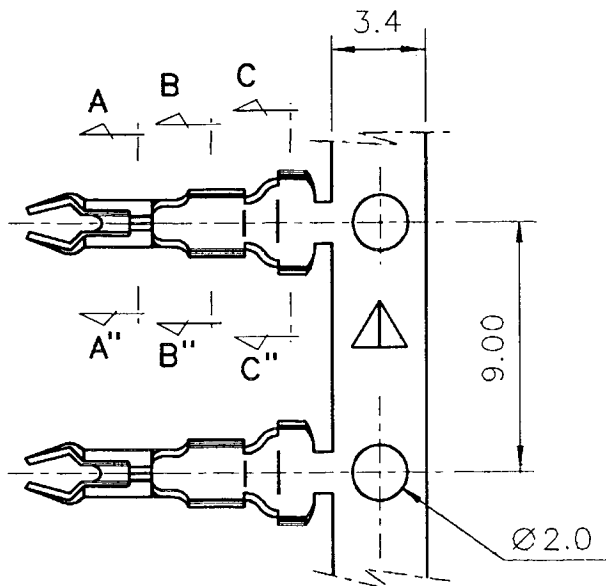




SECTION ; A-A''

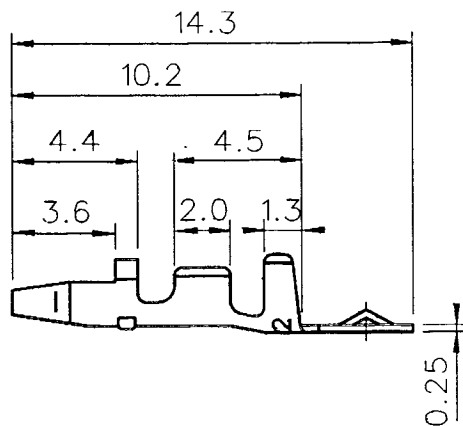

SECTION ; B-B''

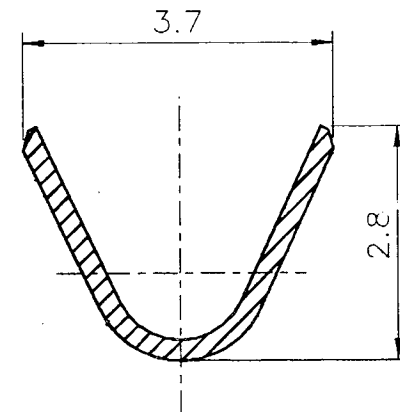

SECTION : C-C''

NOTES

1. MATERIAL : BRASS
PRE-TIN PLATING
2. APPLICABLE : P.C. BOARD HOLE SIZE : $\phi 1.80^{+0.15}_0$
3. DIMENSIONS GIVEN ACROSS CENTERLINES ARE
SYMMETRICAL ABOUT THEIR CENTERLINES
WITHIN HALF THE TOTAL SPECIFIED TOLERANCE.
4. RECOMMENDED LENGTH OF WIRE STRIP IS 2.7-3.5

PRE-RELEASE REFERENCE USE ONLY		ASS'Y PART		QTY/ <u>REEL</u> OR PACK	SURFACE AREA	MATERIAL	SEE NOTES	WIRE RANGE	GENERAL TOLERANCES	HYUNDAI TERMINAL CO.,LTD.	
		DESCRIPTION	ENG.NO.	5.000	—//— MM ²	DIMENSION CLASSIFICATION ▼ : CRITICAL ▼ : MAJOR □ : MINOR () : REFERENCE		AWG: #26-#22	1PLACES: ± 0.2	REVISE ONLY ON CAD SYSTEM	
				DIE NO.	LAYOUT NO.			MM ² :	2PLACES:		
				WIRE CRIMP WIDTH	INS. CRIMP WIDTH	DRAWN BY	CHK'D BY	INSULATION RANGE	TITLE: ∅ 1.8 P.C.B CRIMP TERMINAL (S)		SHEET 1/1
E	CAD REDRAWING	CHOI 94/3/23				B.K.CHOI	B.K.CHOI		ENG.NO. SD 35740 - 8610		REV E
LTR	REVISION RECORD	ECN	DR. CHK	DATE	DIE FEED	APPL FEED	WBDW	IBDW	APP'D BY	SCALE 4/1	