

MDO4000 Pre-Amplifier

TPA-N-PRE Datasheet



TPA-N-PRE Pre-Amp.

Features & Benefits


- 9 kHz - 6 GHz frequency range
- 12 dB gain (nominal)
- 10 dB DANL improvement

Applications


- Measurement of low-power signals

TPA-N-PRE Preamp

The TPA-N-PRE preamplifier accessory for the MDO4000 Series Mixed Domain Oscilloscopes provides 12 dB nominal gain, further lowering the already low noise floor in the MDO4000 Series. This allows you to pull very small signals out of the noise in low-amplitude signal applications. For example, in the following screenshot we are measuring a noise floor of -114 dBm (-154 dBm/Hz) without the TPA-N-PRE preamplifier. It appears that there is only noise present.

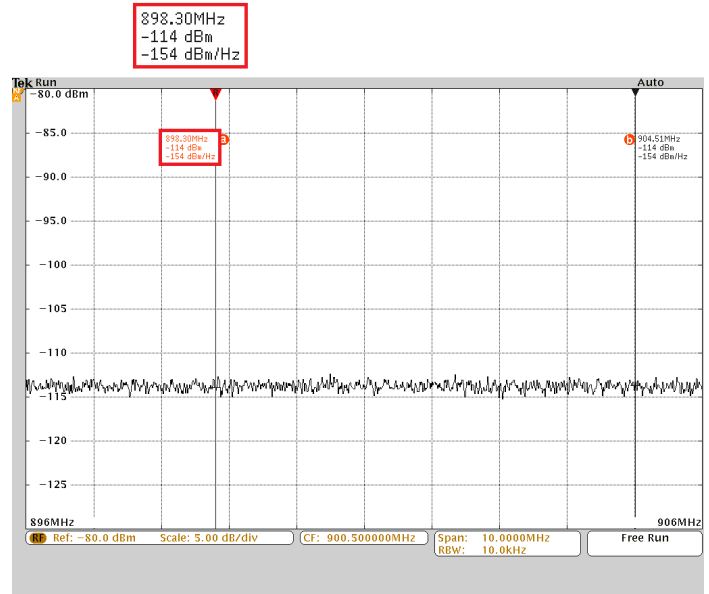

In the screenshot below, we've turned on the preamplifier. Notice that the noise floor has dropped to -124 dBm (-164 dBm/Hz). As a result of the noise floor dropping significantly, we're now able to see a -116 dBm signal present at 900 MHz that was hidden in the noise without the preamplifier.

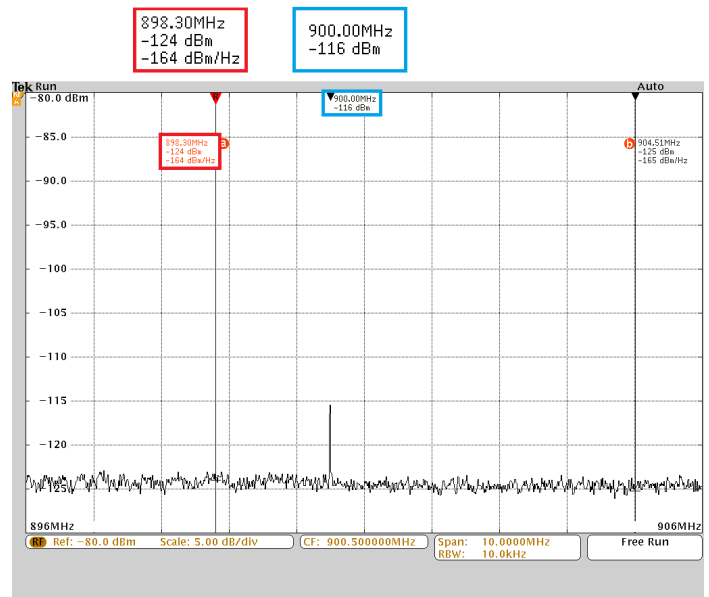

Characteristics

General

Characteristic	Description
Frequency range	Preamp: 9 kHz to 6 GHz MDO4XX4-6 with preamp: 50 kHz to 6 GHz MDO4XX4-3 with preamp: 50 kHz to 3 GHz
Preamp gain	Amplifying state: 12 dB (nominal) Bypass state: -1.5 dB (nominal)
Displayed average noise level (DANL) with the preamp attached to the MDO RF input	With the preamp mode set to "Auto" and the reference level set to -40 dBm: MDO4XXX-6: 50 kHz to 5 MHz: < -140 dBm/Hz (-144 dBm/Hz typical) 5 MHz to 3 GHz: < -158 dBm/Hz (-162 dBm/Hz typical) 3 GHz to 6 GHz: < -150 dBm/Hz (-153 dBm/Hz typical) MDO4XX4-3: 50 kHz to 5 MHz: < -140 dBm/Hz (-144 dBm/Hz typical) 5 MHz to 3 GHz: < -158 dBm/Hz (-162 dBm/Hz typical)
Level measurement uncertainty	This specification is for the MDO RF channel with a preamp attached, input levels of -2 dBm to -62 dBm, RBW set to "Auto", and applies to both amplifying and bypass states. < ±1.5 dB (< ±1 dB typical), 20 °C to 30 °C temperature range. ≤ 2 dBm (max), over full operating range.
Maximum operating input level with preamp attached to the MDO RF input	Average continuous power: +30 dBm (1 W) DC maximum before damage: ±20 V DC Maximum power before damage (CW): +30 dBm (1 W) Maximum power before damage (pulse): +45 dBm (32 W) (<10 μs pulse width, <1% duty cycle, and reference level of ≥ +10 dBm)
Reference level range with preamp attached to MDO RF input	Amplifying state: -30 dBm to DANL Bypass state: +30 dBm to DANL.
Connector type	SMA – female (outside threads)

Environmental

Characteristic	Description
Temperature	
Operating	0 °C to +50 °C
Nonoperating	-20 °C to +60 °C
Humidity	
Operating	High: 40 °C to 50 °C (104 °F to 122 °F), 10% to 60% RH Low: 0 °C to 40 °C (32 °F to 104 °F) 10% to 90% RH
Nonoperating	High: 40 °C to 60 °C (104 °F to 122 °F), 10% to 60% RH Low: 0 °C to 40 °C (32 °F to 104 °F) 5% to 90% RH
Altitude	
Operating	Up to 3,000 meters
Nonoperating	Up to 12,000 meters

Power Requirements

The TPA-N-PRE is powered directly from the RF input on MDO4000 Series oscilloscopes.

Regulatory

Compliance labeling: WEEE (European Union).

Recommended Oscilloscopes

MDO4000 Mixed Domain Oscilloscopes

Note: For best probe support, download and install the latest version of the oscilloscope firmware from www.tektronix.com

Warranty information

One year parts and labor.

Ordering Information

TPA-N-PRE

MDO4000 Pre-Amplifier. Includes Instruction Manual (English) (071-3058-XX)

Contact Tektronix:

- ASEAN / Australasia** (65) 6356 3900
- Austria** 00800 2255 4835*
- Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777
- Belgium** 00800 2255 4835*
- Brazil** +55 (11) 3759 7627
- Canada** 1 800 833 9200
- Central East Europe and the Baltics** +41 52 675 3777
- Central Europe & Greece** +41 52 675 3777
- Denmark** +45 80 88 1401
- Finland** +41 52 675 3777
- France** 00800 2255 4835*
- Germany** 00800 2255 4835*
- Hong Kong** 400 820 5835
- India** 000 800 650 1835
- Italy** 00800 2255 4835*
- Japan** 81 (3) 6714 3010
- Luxembourg** +41 52 675 3777
- Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90
- Middle East, Asia, and North Africa** +41 52 675 3777
- The Netherlands** 00800 2255 4835*
- Norway** 800 16098
- People's Republic of China** 400 820 5835
- Poland** +41 52 675 3777
- Portugal** 80 08 12370
- Republic of Korea** 001 800 8255 2835
- Russia & CIS** +7 (495) 7484900
- South Africa** +41 52 675 3777
- Spain** 00800 2255 4835*
- Sweden** 00800 2255 4835*
- Switzerland** 00800 2255 4835*
- Taiwan** 886 (2) 2722 9622
- United Kingdom & Ireland** 00800 2255 4835*
- USA** 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

17 Oct 2012

51W-28540-0

