

CLIFF

1U PANELS



16 holes of Ø24mm with cable bar and label strip

VARIANTS

CP30150 - 1U PANEL WITH PLAIN HOLES

CP30151 - 1U PANEL WITH M3 HOLES

CP30152 - 1U PANEL WITH 4-40 HOLES

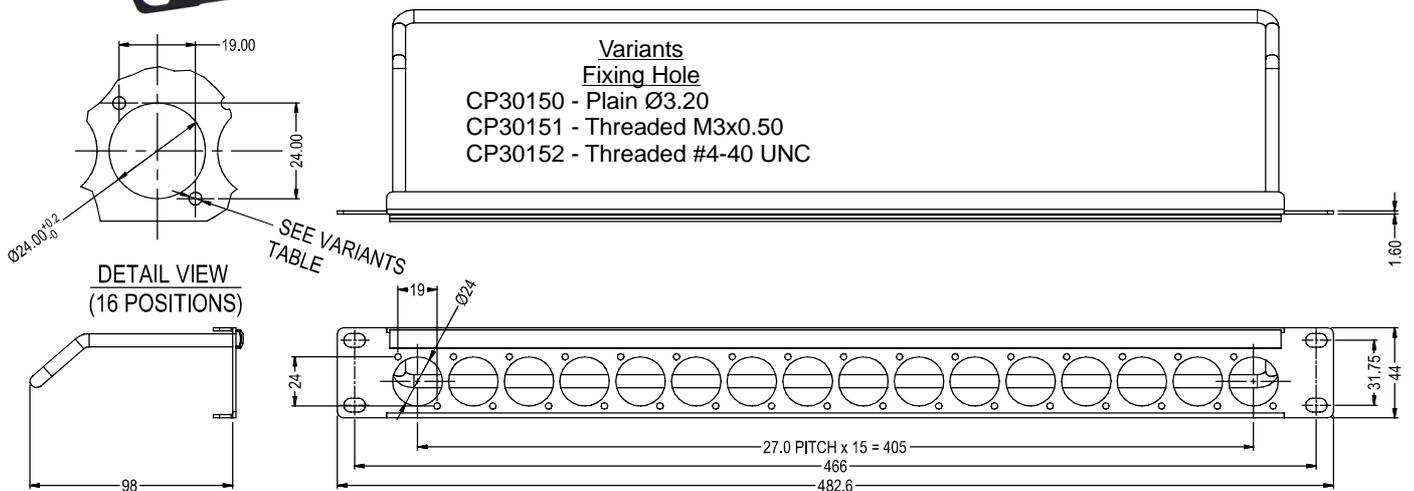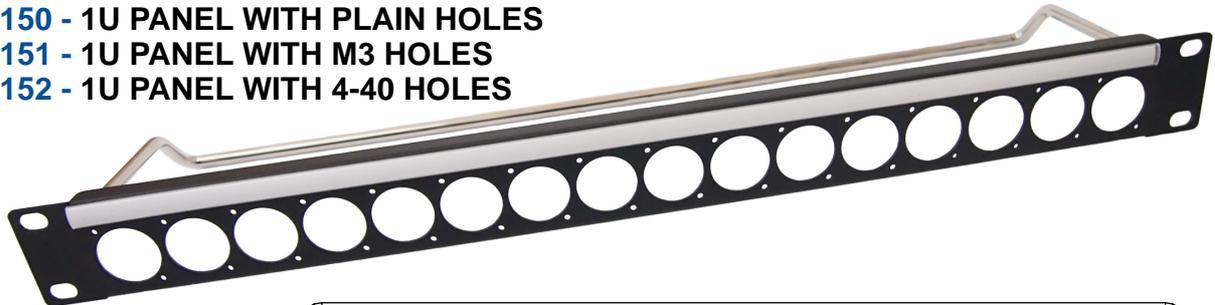

LOADED PANEL



CP30170 - 1U Panel loaded with 16 x 75Ω Insulated BNC Connectors. M3 holes. Front mounted.

CP30171 - 1U Panel loaded with 16 x 75Ω Insulated BNC Connectors. #4-40 holes. Front mounted



CLIFF

LOADED PANELS



CP30172 - 1U Panel loaded with 16 x CAT6 RJ45 Connectors. #4-40 holes. Front mounted
CP30173 - 1U Panel loaded with 16 x CAT6 RJ45 Connectors. M3 holes. Front mounted



CP30174 - 1U Panel loaded with 16 x HDMI A-A Connectors. M3 Holes. Front mounted



CP30175 - 1U Panel loaded with 16 x USB2 A-B Connectors. M3 Holes. Front mounted



CP30176 - 1U Panel loaded with 16 x USB2 B-A Connectors. M3 Holes. Front mounted



CP30177 - 1U Panel loaded with 16 x CAT6A Connectors. M3 Holes. Front mounted



CP30178 - 1U Panel loaded with 16 x ST Fibre Connectors. M3 Holes. Front mounted

CLIFF

LOADED PANELS



CP30179 - 1U Panel loaded with 16 x LC Duplex SM Connectors. M3 Holes. Front mounted



CP30180 - 1U Panel loaded with 16 x LC Duplex MM Connectors. M3 Holes. Front mounted



CP30181 - 1U Panel loaded with 16 x XLR 3DCM . M3 Holes. Front mounted



CP30182 - 1U Panel loaded with 16 x XLR 3DCF . M3 Holes. Front mounted



CP30183 - 1U Panel loaded with 8 x XLR 3DCF + 8 x XLR 3DCM. M3 Holes. Front mounted



CP30184 - 1U Panel loaded with 16 x 50Ω Insulated BNC Connectors. M3 Holes. Front mounted