

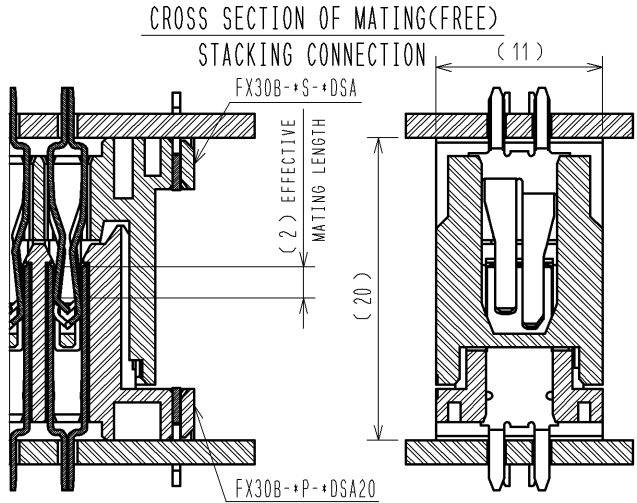
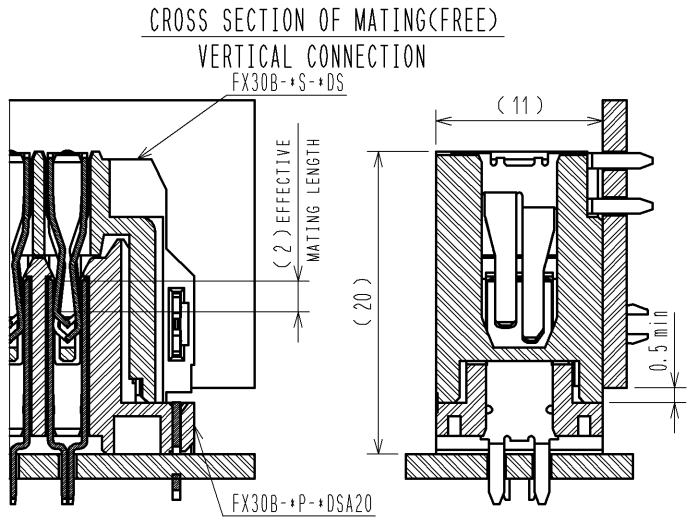
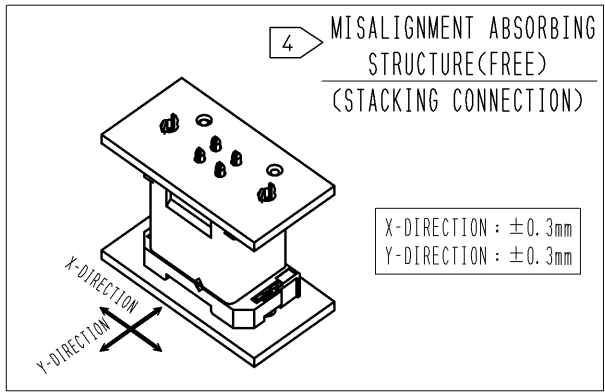



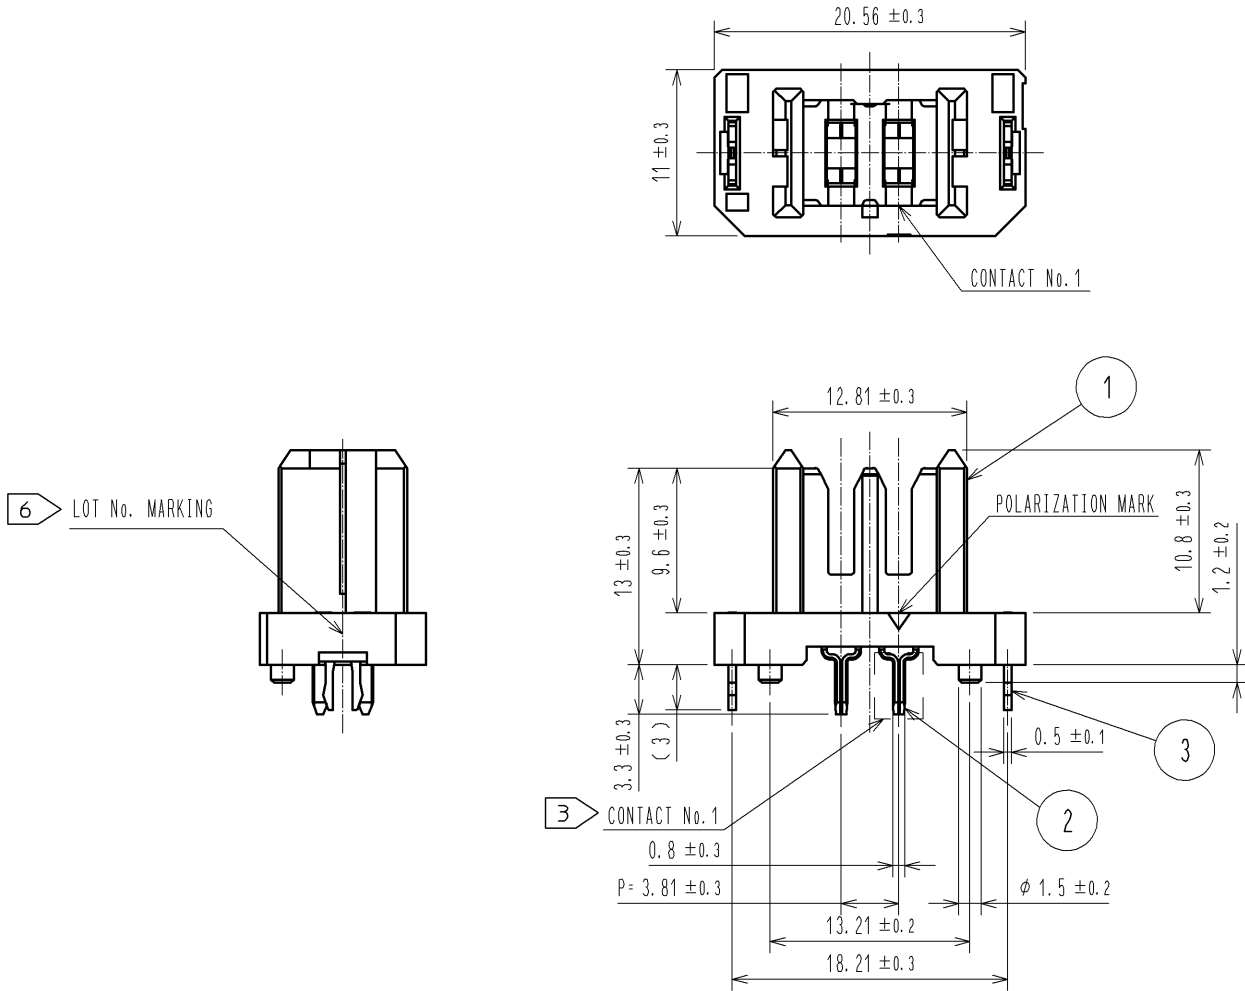


- NOTE
- 1 THIS PRODUCT IS PACKAGED IN TRAY. (49pcs/TRAY)
 - 2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOSEN'T AFFECT QUALITY LEVEL. ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
 - 3 FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL) COMPOSE ONE LINE.
 - 4 MISALIGNMENT ABSORBING RANGE: ± 0.3mm max.
 - 5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
 - 6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.


2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm	4	POLYSTYRENE	TIN-PLATING 3.0 μm UNDER PLATING:NICKEL 1.0 μm
		LEAD AREA:TIN-PLATING 1.0 μm		PHOSPHOR BRONZE	
		UNDER PLATING:NICKEL 1.0 μm		BLACK UL94V-0	
1	POLYAMIDE	BLACK UL94V-0	3		
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-F-006956	DESIGNED DK. AIMOTO
		APPROVED : HS. OKAWA	13. 03. 07	DRAWING NO.	EDC3-347255-00
		CHECED : KI. HIROKAWA	13. 03. 07	PART NO.	FX30B-2P-3. 81DSA20
		DESIGNED : DK. AIMOTO	13. 03. 07	CODE NO.	CL570-3100-3-00
		DRAWN : DK. AIMOTO	13. 03. 07		
				CHECKED KI. HIROKAWA	DATE 13. 08. 26

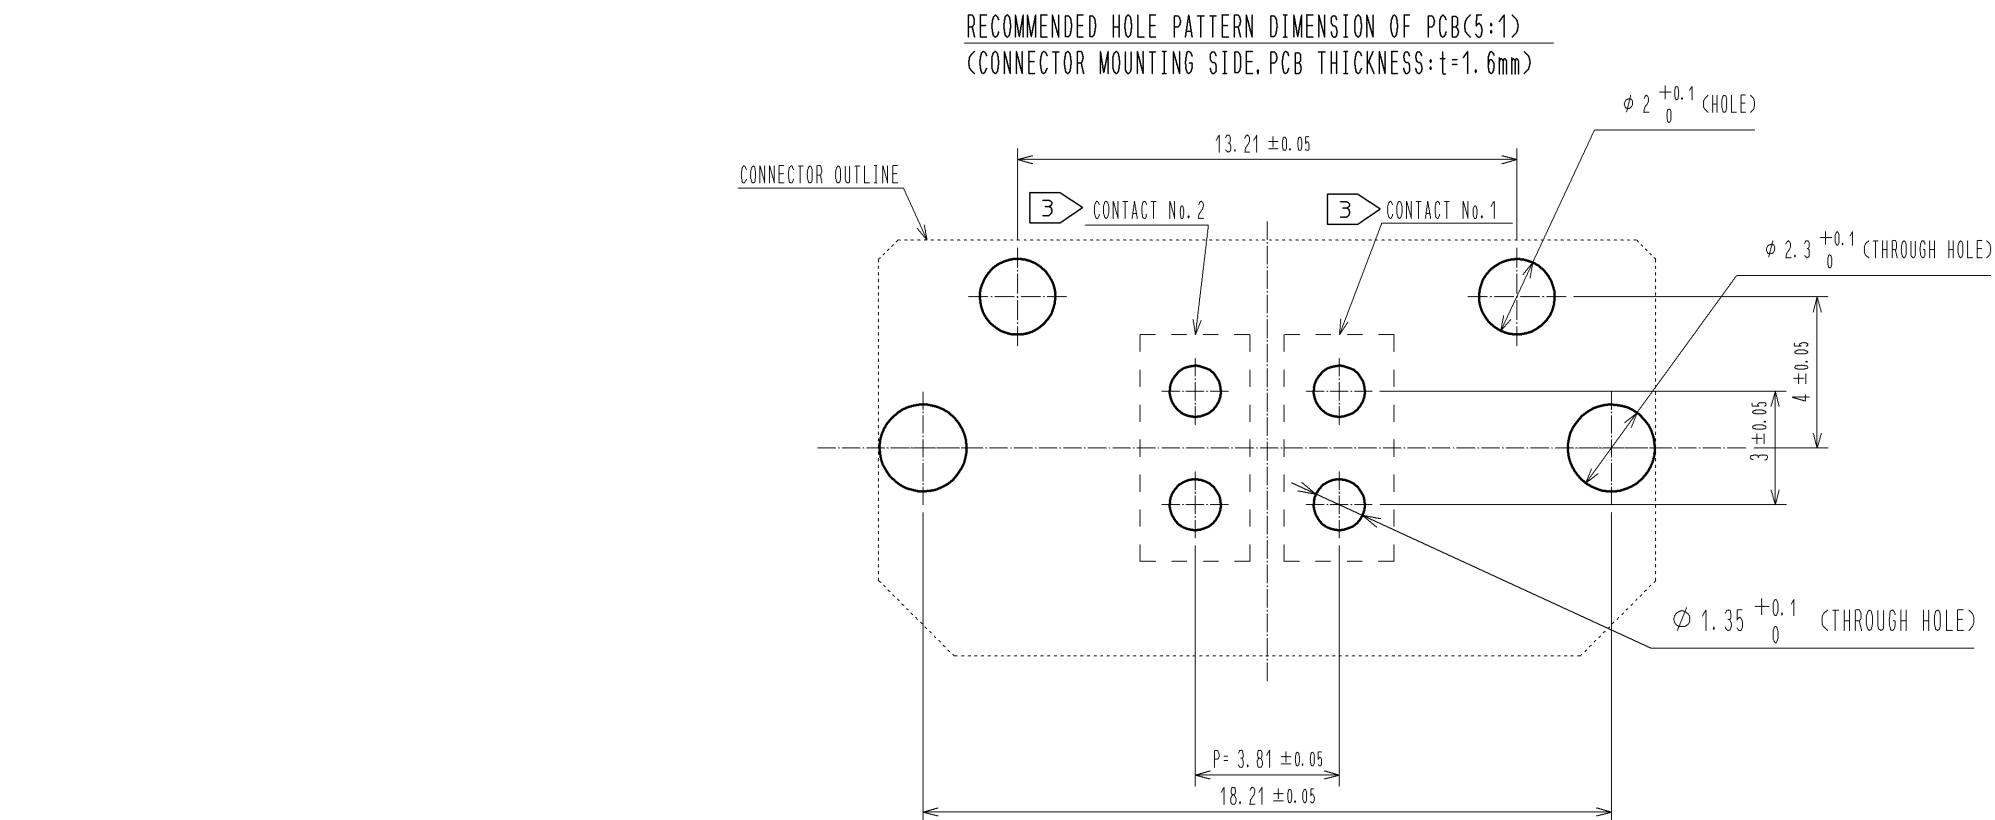

 1 DRAWING FOR PACKAGING(1:2)

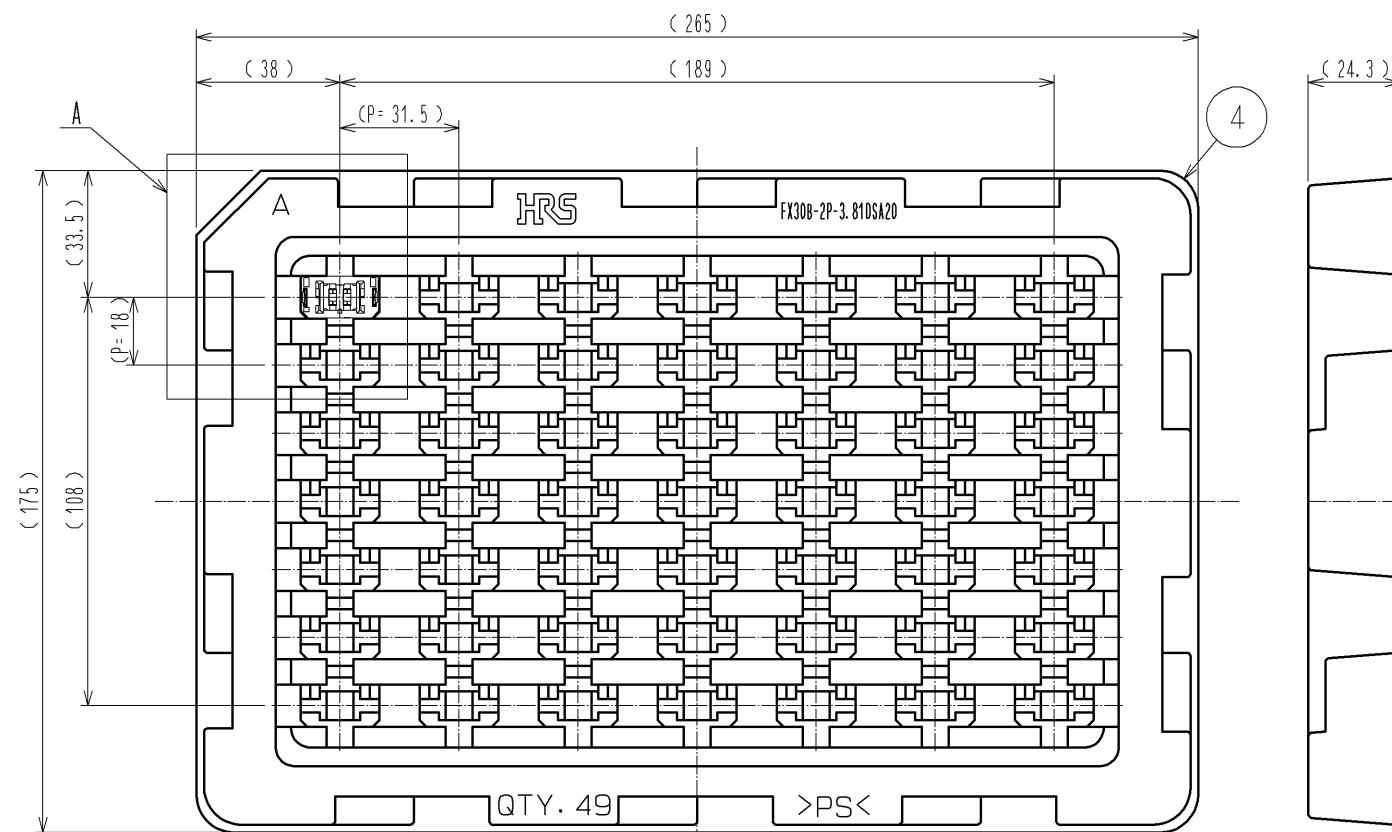

 A(1:1)

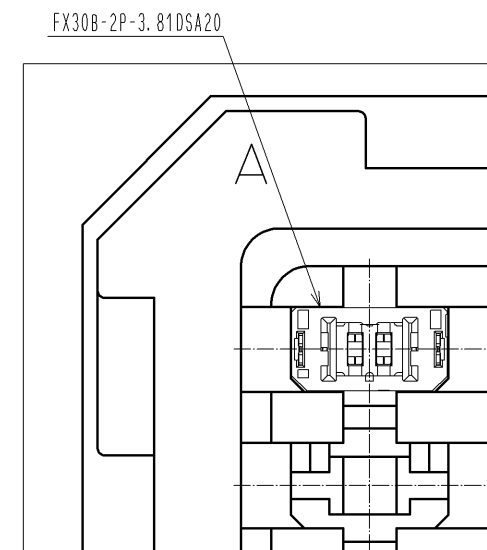**HRS**

DRAWING NO.	EDC3-347255-00
PART NO.	FX30B-2P-3.81DSA20
CODE NO.	CL570-3100-3-00

 2/2