

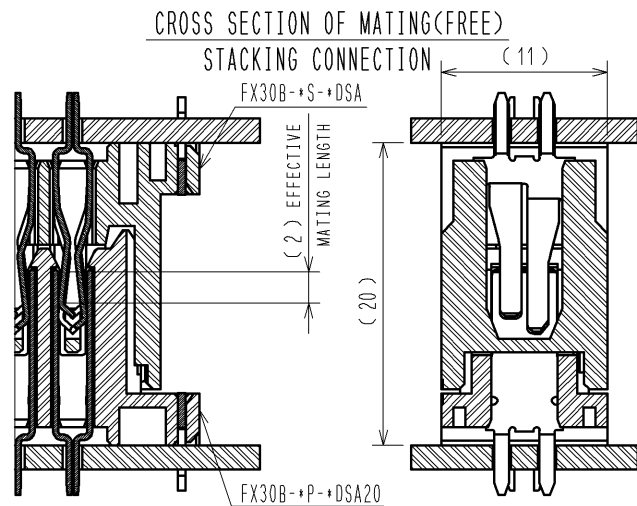
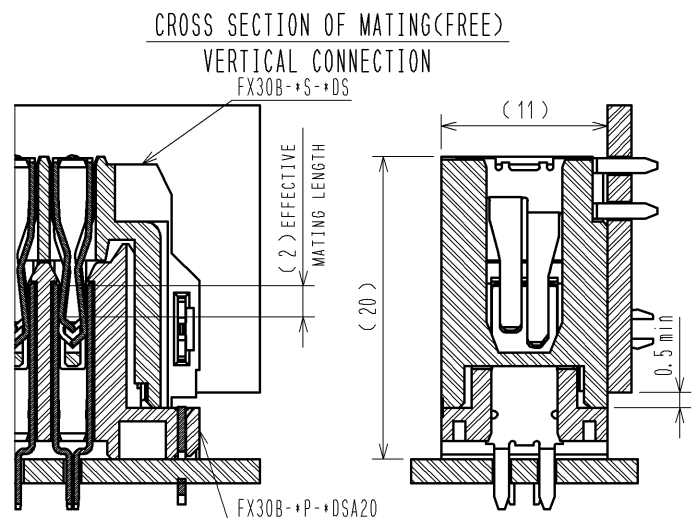
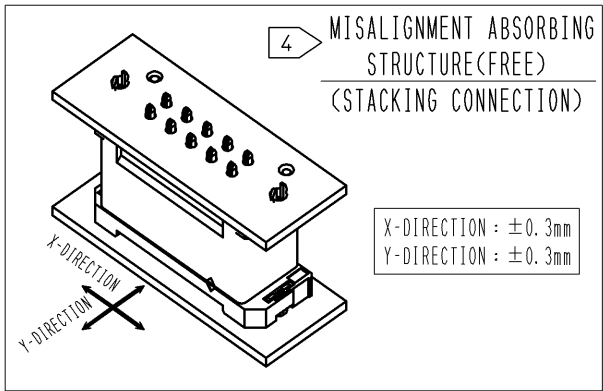
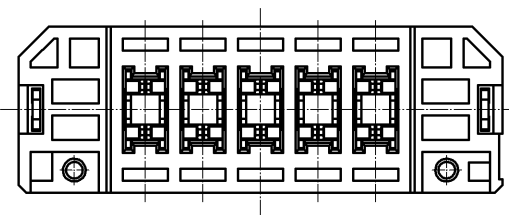
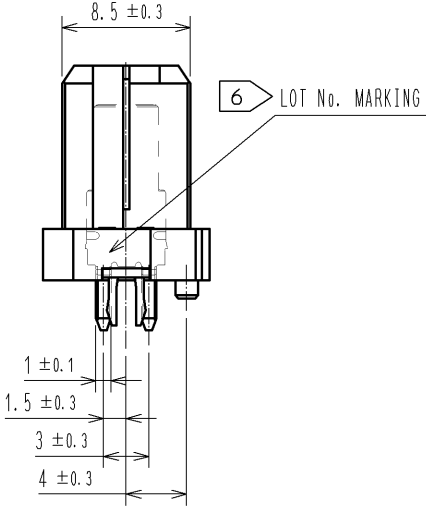
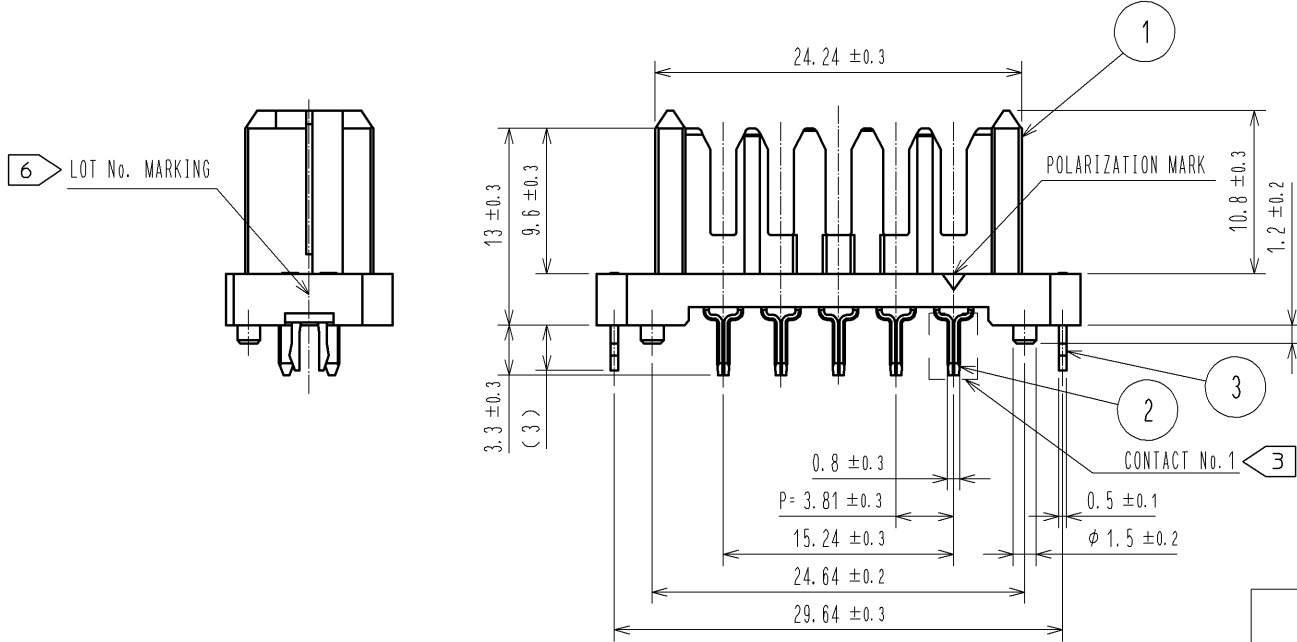


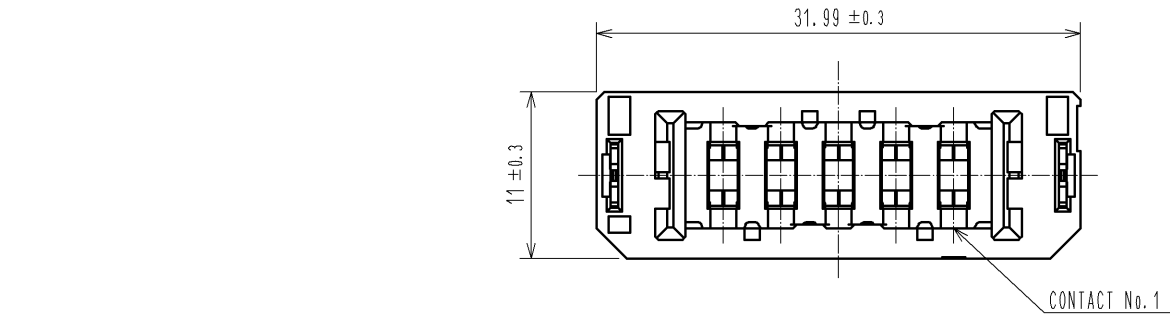

NOTE 1 THIS PRODUCT IS PACKAGED IN TRAY. (35pcs/TRAY)
2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOSEN'T AFFECT QUALITY LEVEL.
ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
3 FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL) COMPOSE ONE LINE.
4 MISALIGNMENT ABSORBING RANGE: ± 0.3 mm max.
5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.

2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm			4	POLYSTYRENE					
		LEAD AREA:TIN-PLATING 1.0 μm									
		UNDER PLATING:NICKEL 1.0 μm									
1	POLYAMIDE	BLACK UL94V-0			3	PHOSPHOR BRONZE	TIN-PLATING 3.0 μm				
							UNDER PLATING:NICKEL 1.0 μm				
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS				
UNITS mm				SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-F-006956		DESIGNED DK. AIMOTO	CHECKED KI. HIROKAWA	DATE 13. 08. 26
 HIROSE ELECTRIC CO. , LTD.				APPROVED : HS. OKAWA		13. 03. 13		DRAWING NO. EDC3-347258-00			
				CHECED : KI. HIROKAWA		13. 03. 12		PART NO. FX30B-5P-3. 81DSA20			
				DESIGNED : DK. AIMOTO		13. 03. 11		CODE NO. CL570-3103-1-00			
				DRAWN : DK. AIMOTO		13. 03. 11		 1/2			

