



Product / Process Change Notification (PCN)

- ☒ Major change
☐ Minor change

PCN #: PCN_FeSTAR-CLIP_20231006

Affected Series: WE-STAR-CLIP; 7427711; 7427713

PCN Date: July 07, 2023

Effective Date: October 06, 2023

Change Category:

- ☐ Equipment / Location
☐ General Data
☐ Material
☐ Process
☒ Product Design
☐ Shipping / Packaging
☐ Supplier
☐ Software

Contact: Product Management

Phone: +49 (0) 7942 - 945 5001

Fax: +49 (0) 7942 - 945 5179

E-Mail: pcn.eisos@we-online.com

Data Sheet Change:

- ☒ Yes ☐ No

Attachment:

- ☐ Yes ☒ No

Description and purpose of change:

To ensure an improved product assembly, Würth Elektronik will improve the design of the screw fixation area.


All products with date code 2023-07-07 or later, will be affected by this change.

There will be no change in fit, function, quality or reliability of the product.

Detail of change:


Valid for 7427713

BEFORE CHANGE

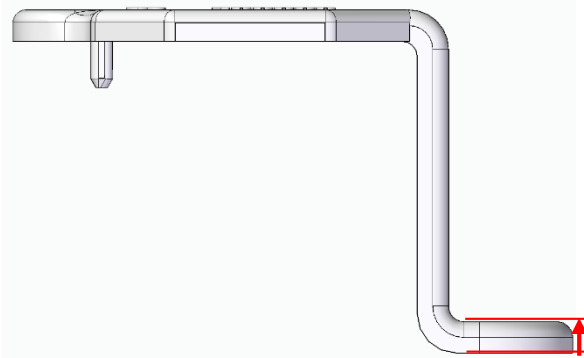


Thickness of the screw fixation area was **2.20 mm**


AFTER CHANGE

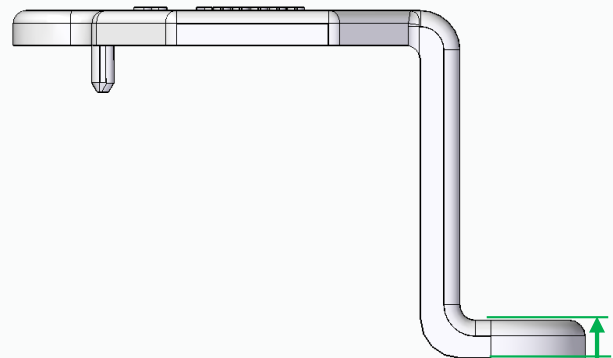





Thickness of the screw fixation area will be **2.40 mm**

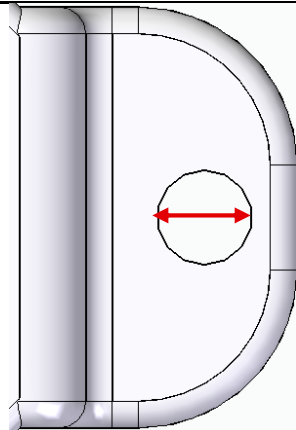

Borehole diameter was **3.60 mm**

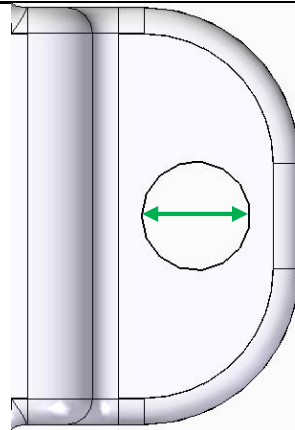

Borehole diameter will be **4.20 mm**

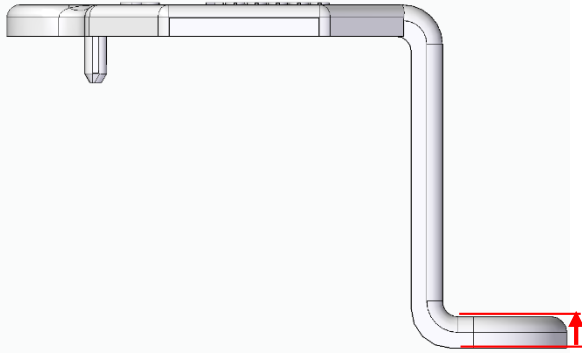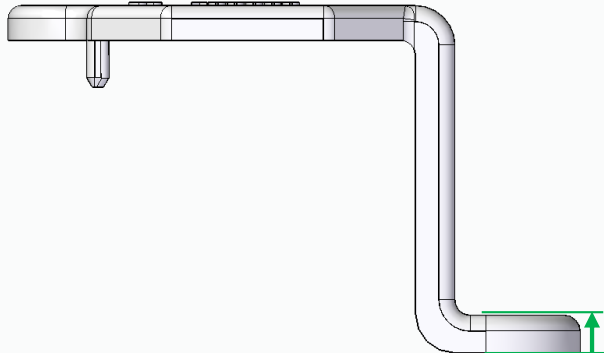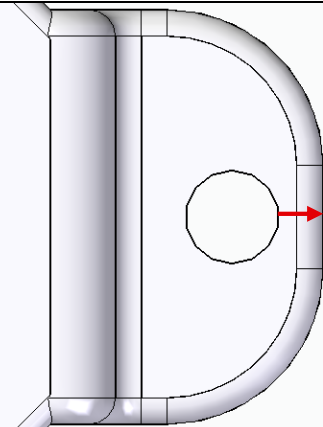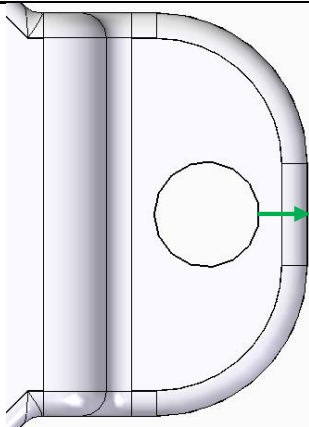Valid for 7427711	
BEFORE CHANGE	AFTER CHANGE
 Thickness of the screw fixation area was 2.20 mm	 Thickness of the screw fixation area will be 2.40 mm.
 Distance between borehole and edge was 1.50 mm	 Distance between borehole and edge will be 1.90 mm
Reliability / Qualification Summary: Product approval is according to the specification criteria and is internally released by the Product Management Department. The following items are part of the internal release process for this change: - Visual Appearance (Surface, Burr, Contaminations, ...) - Mechanical Parameters (according as specified in the Datasheet) - Approval of production line	