
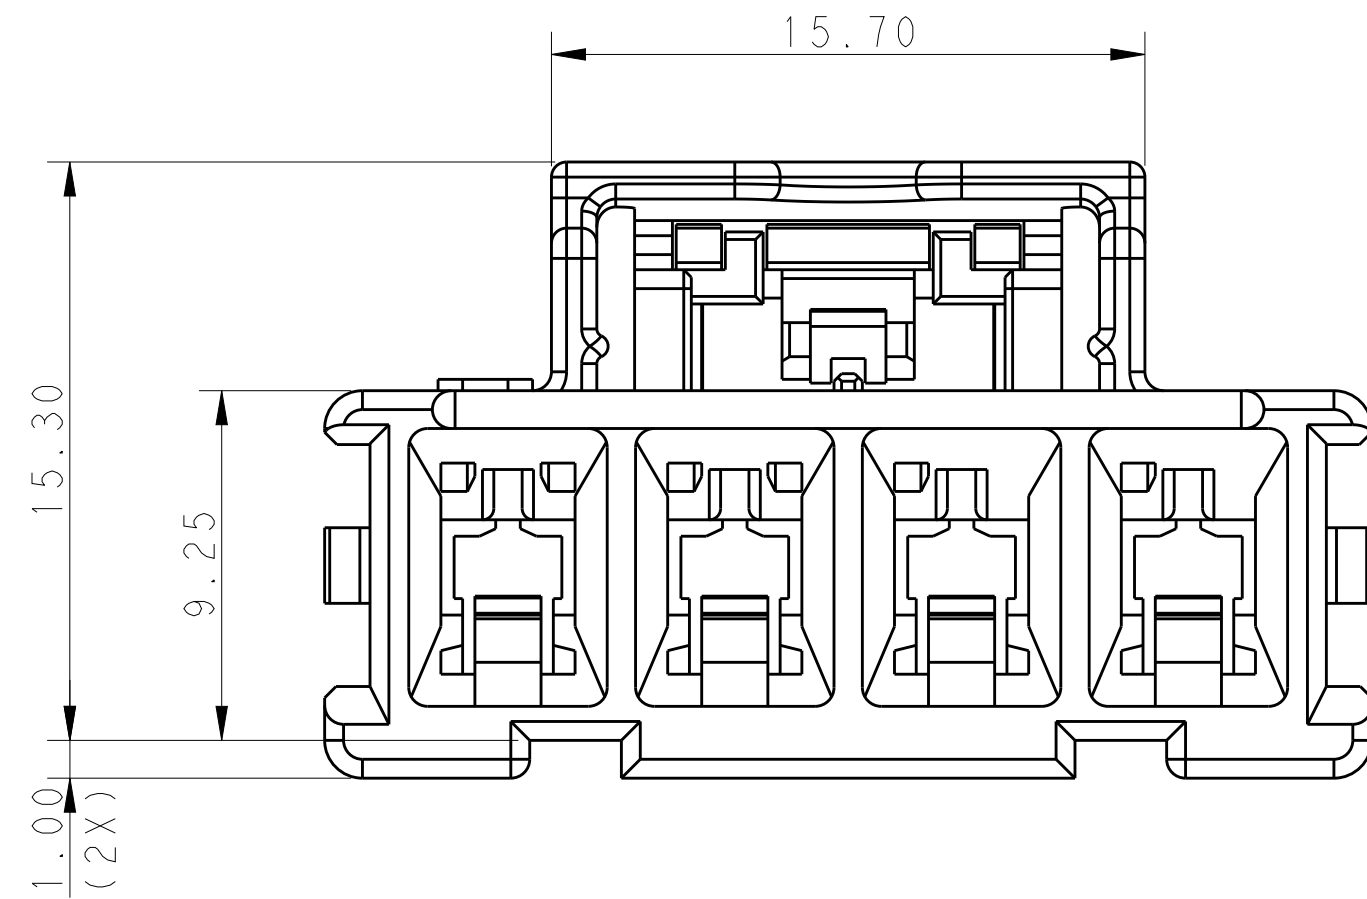
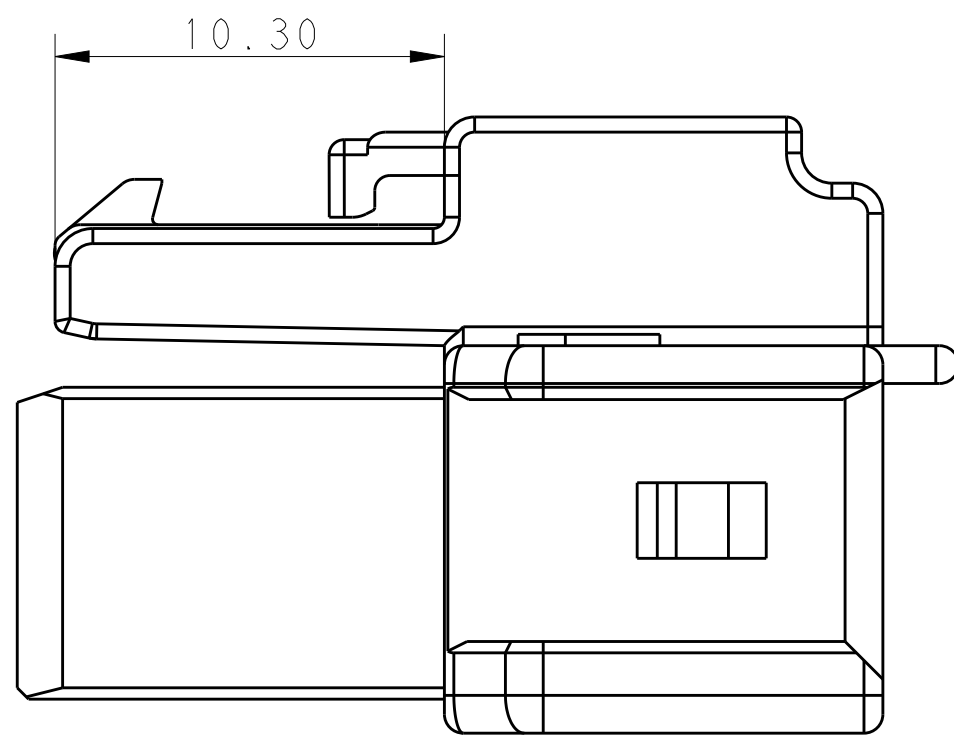
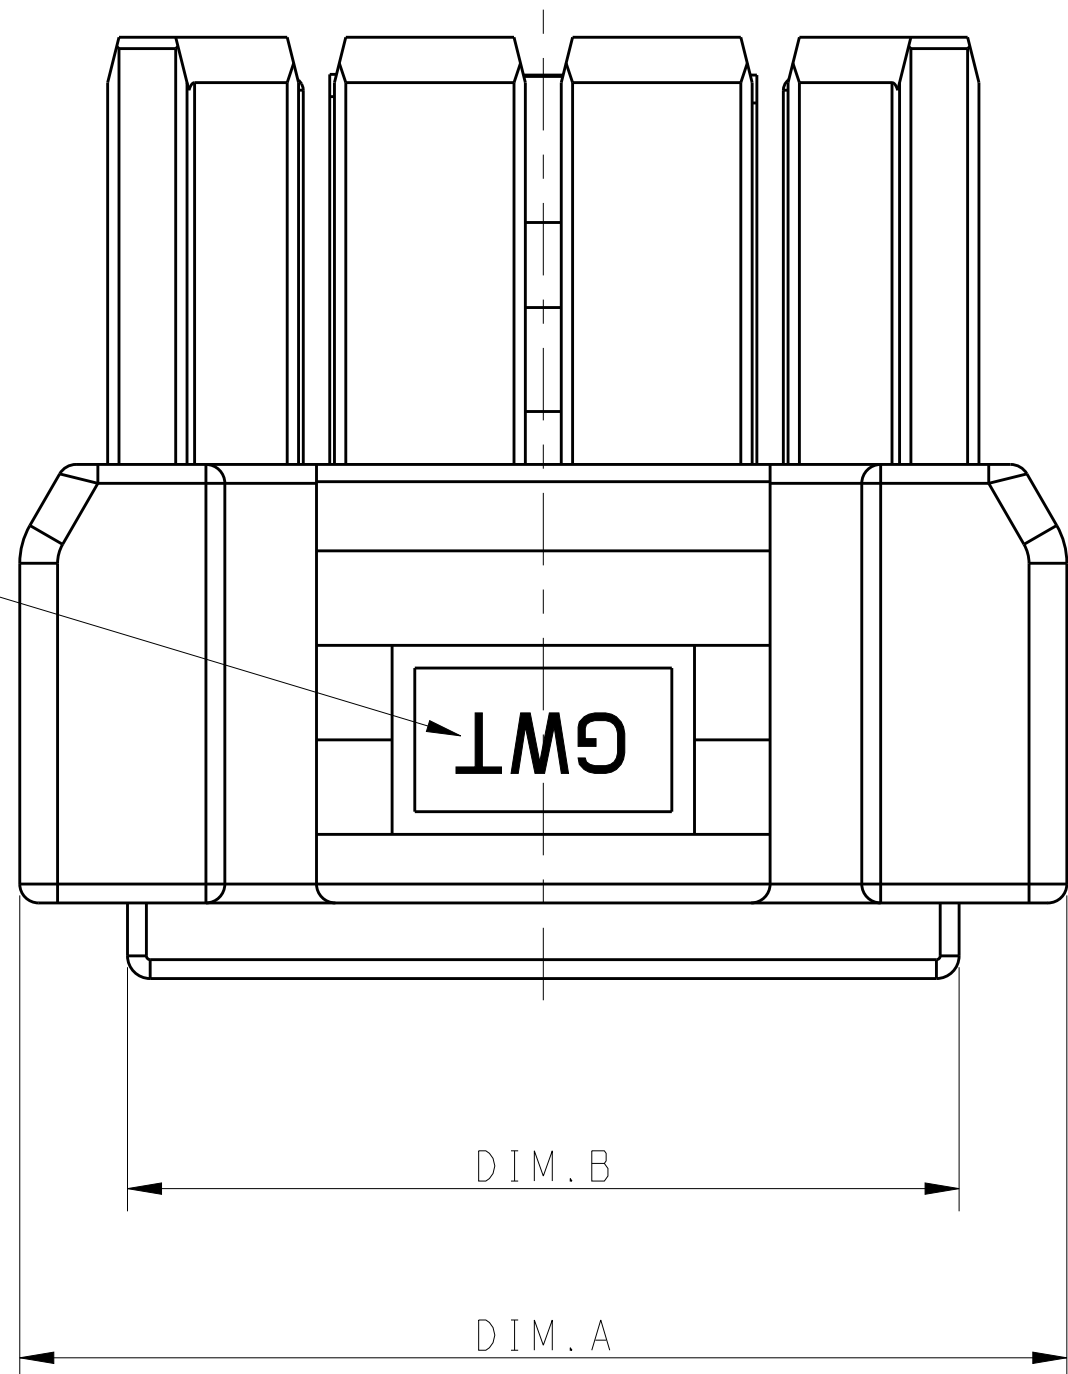
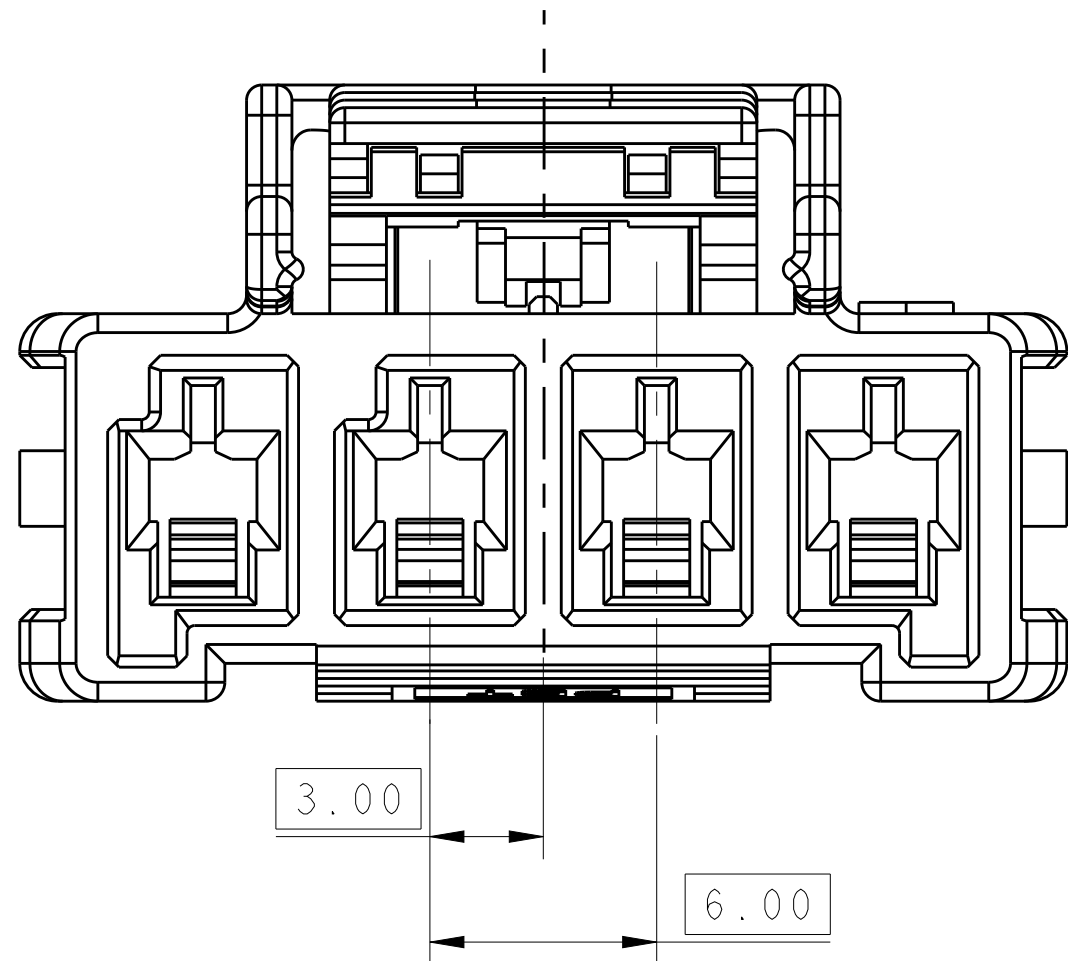


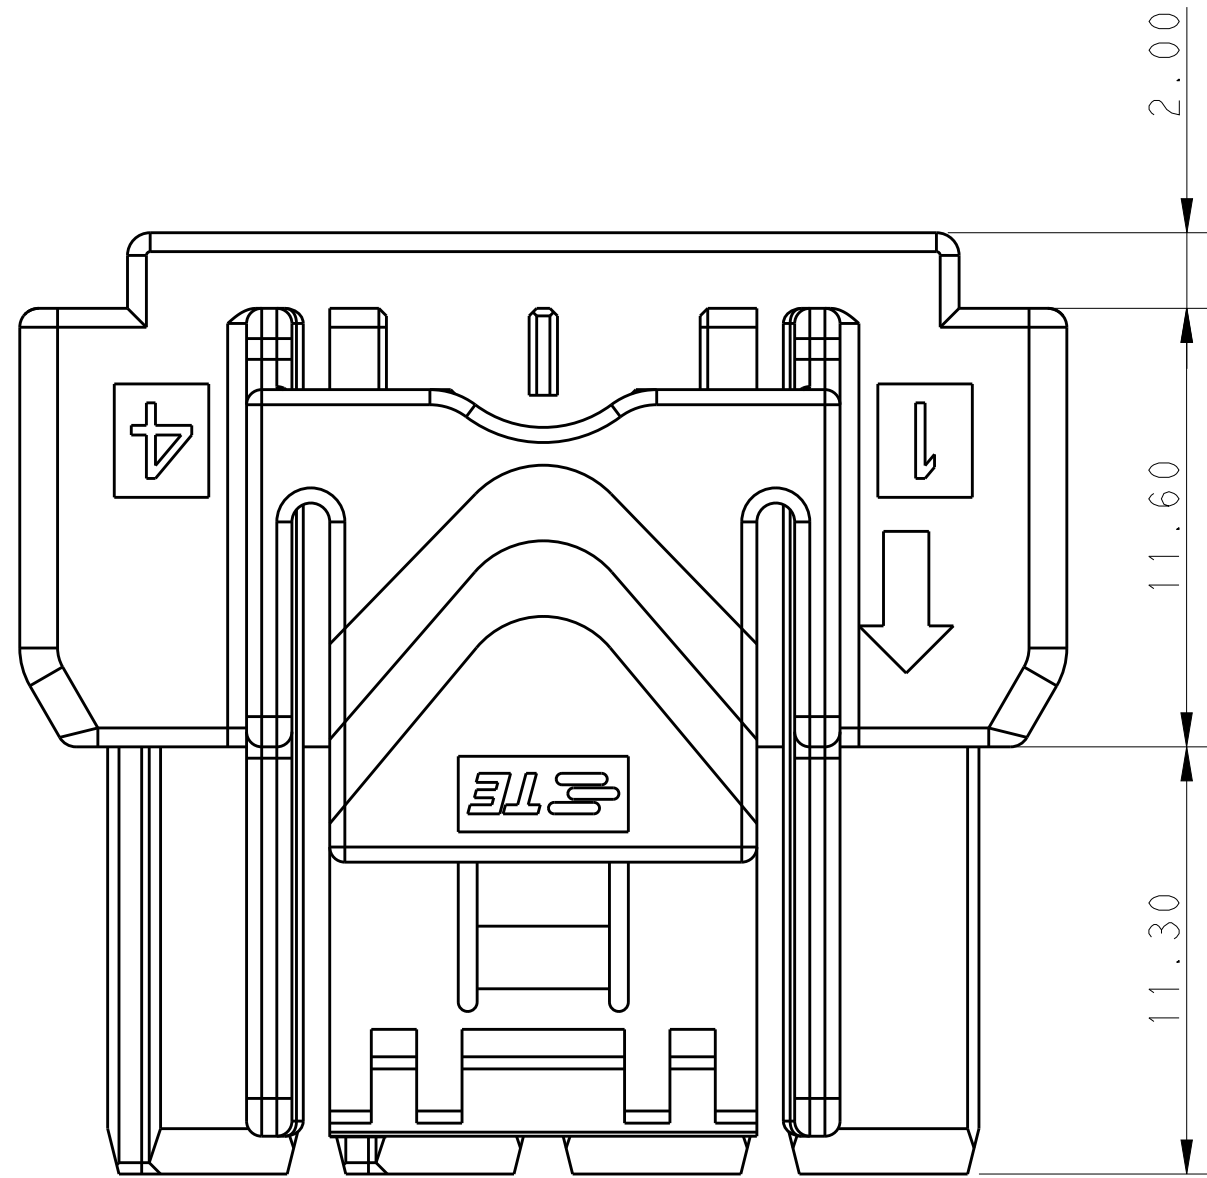

NOTE
1. MATERIAL:
LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0

2. MATERIAL MARK:
LEVEL A: GWT, LEVEL B: HWT

3. APPLICABLE CONTACT P/N
REC CONTACT: 1971237/1971779/81/83/85/87-*









4. MATING CONN. P/N
CAP HSG: *-2232358/263-
DOUBLE LOCK PLATE: *-1971777-*

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
B2		REVISED PER ECR-14-003436		11MAR2014	NK	GJ	

POS.	DIM.A	DIM.B
1*5	33.70	28.00
1*4	27.70	22.00
1*3	21.70	16.00
1*2	15.70	10.00

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY_WU		26MAR2013		 TE Connectivity	
		CHK	HAPYE_WU		26MAR2013			
DIMENSIONS:		APVD	YUZHONG_MAO		26MAR2013		NAME	
mm		PRODUCT SPEC						
		108-106118					PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK -	
		APPLICATION SPEC						
		114-106118						
		FINISH						
MATERIAL		WEIGHT					SIZE	
SEE TABLE		-						
		Customer Drawing					CAGE CODE	
							DRAWING NO	
							RESTRICTED TO	
							SCALE	
							SHEET	
							REV	
							B2	

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
					-	SEE SHEET 1		-	-

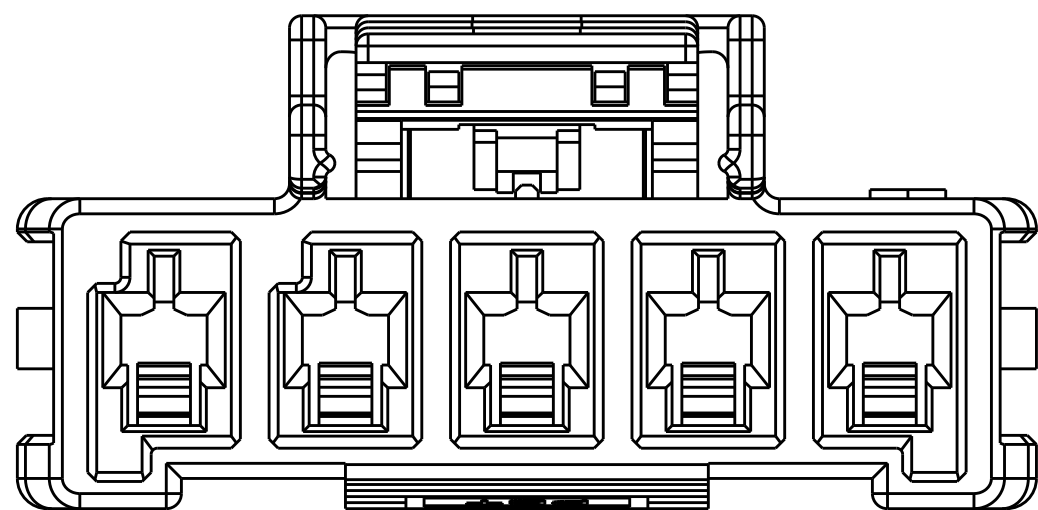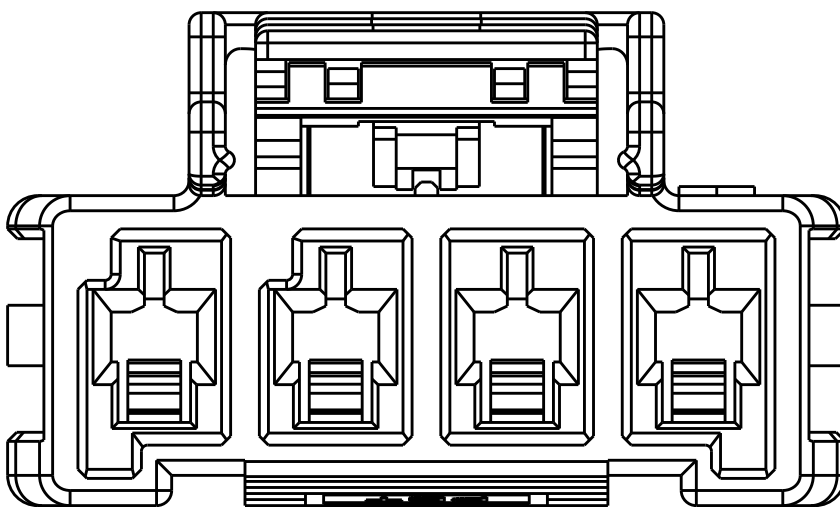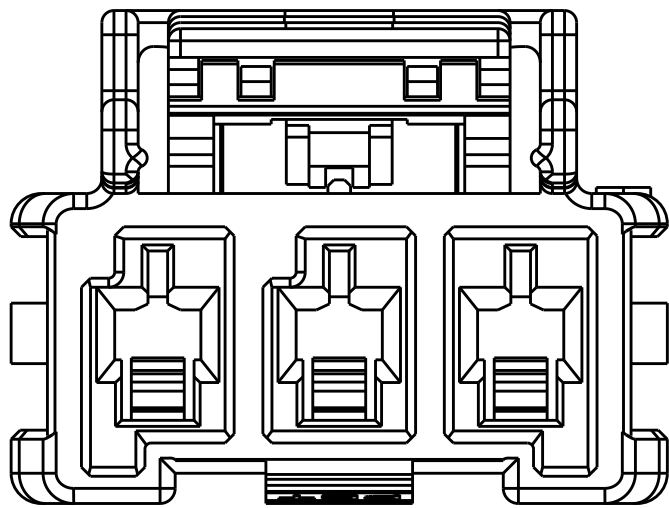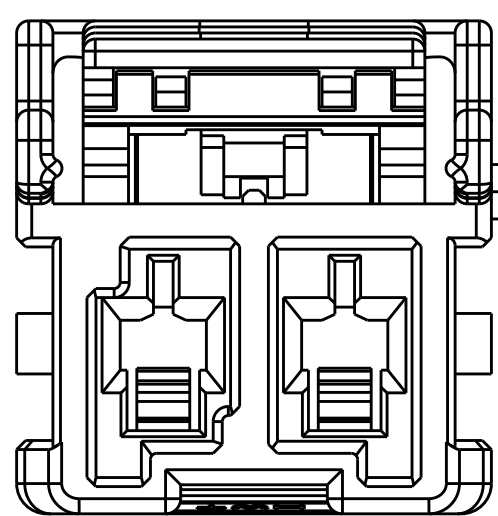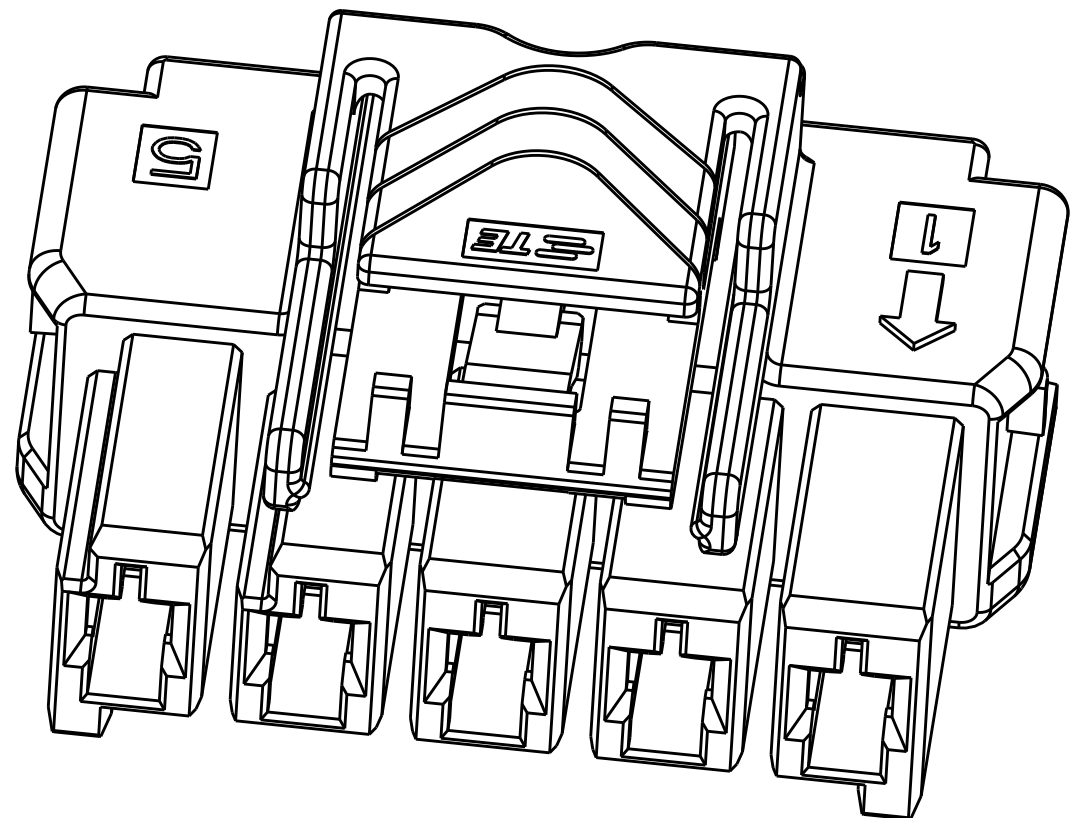
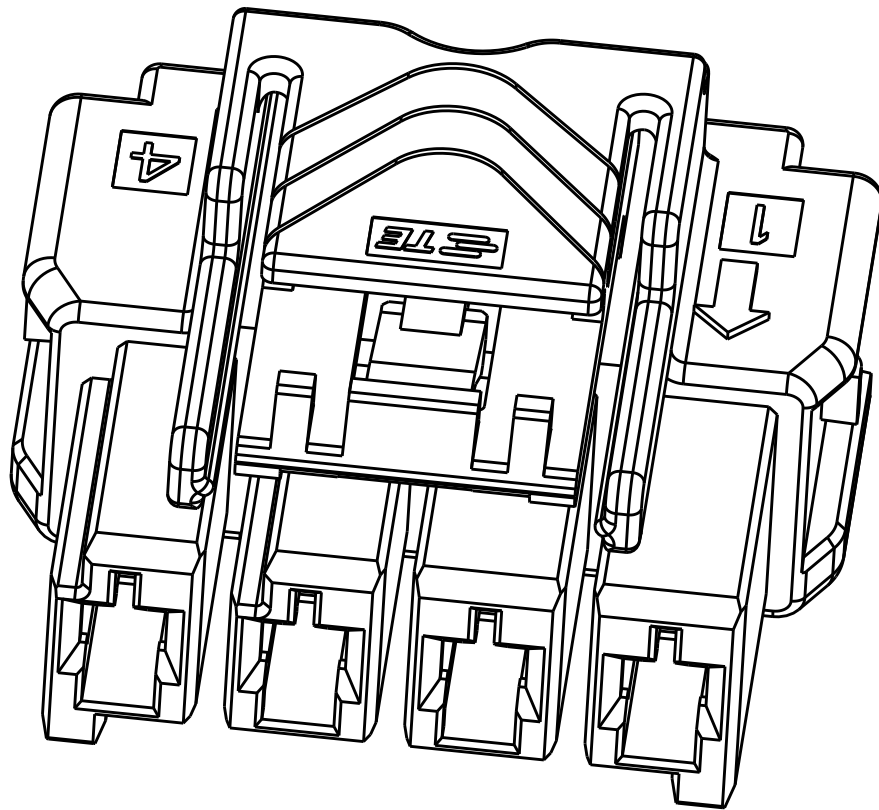
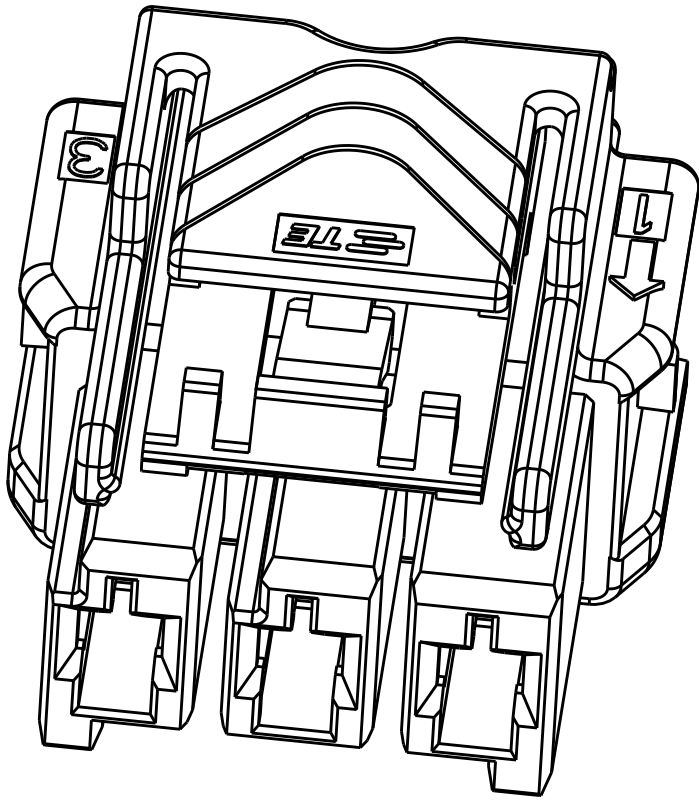
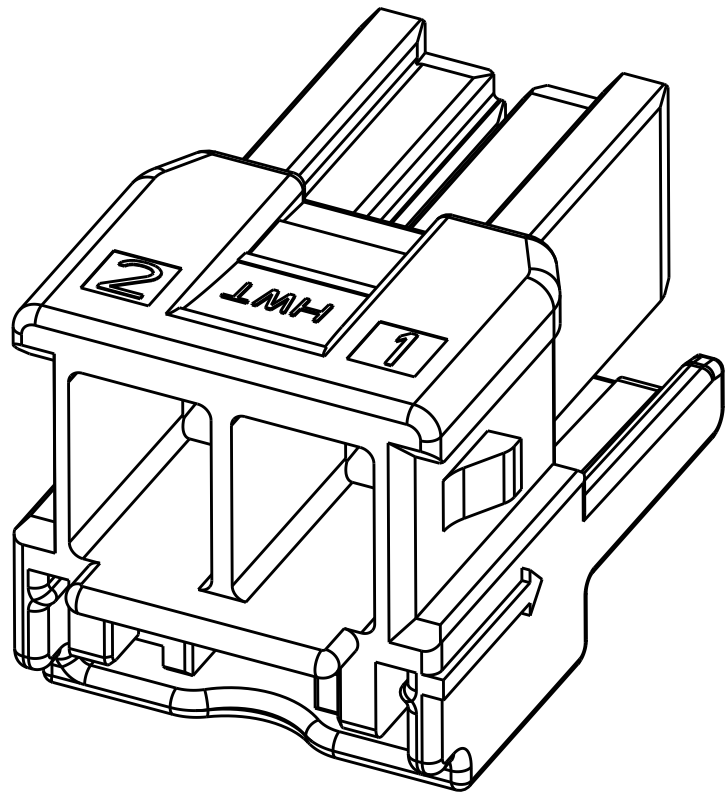


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

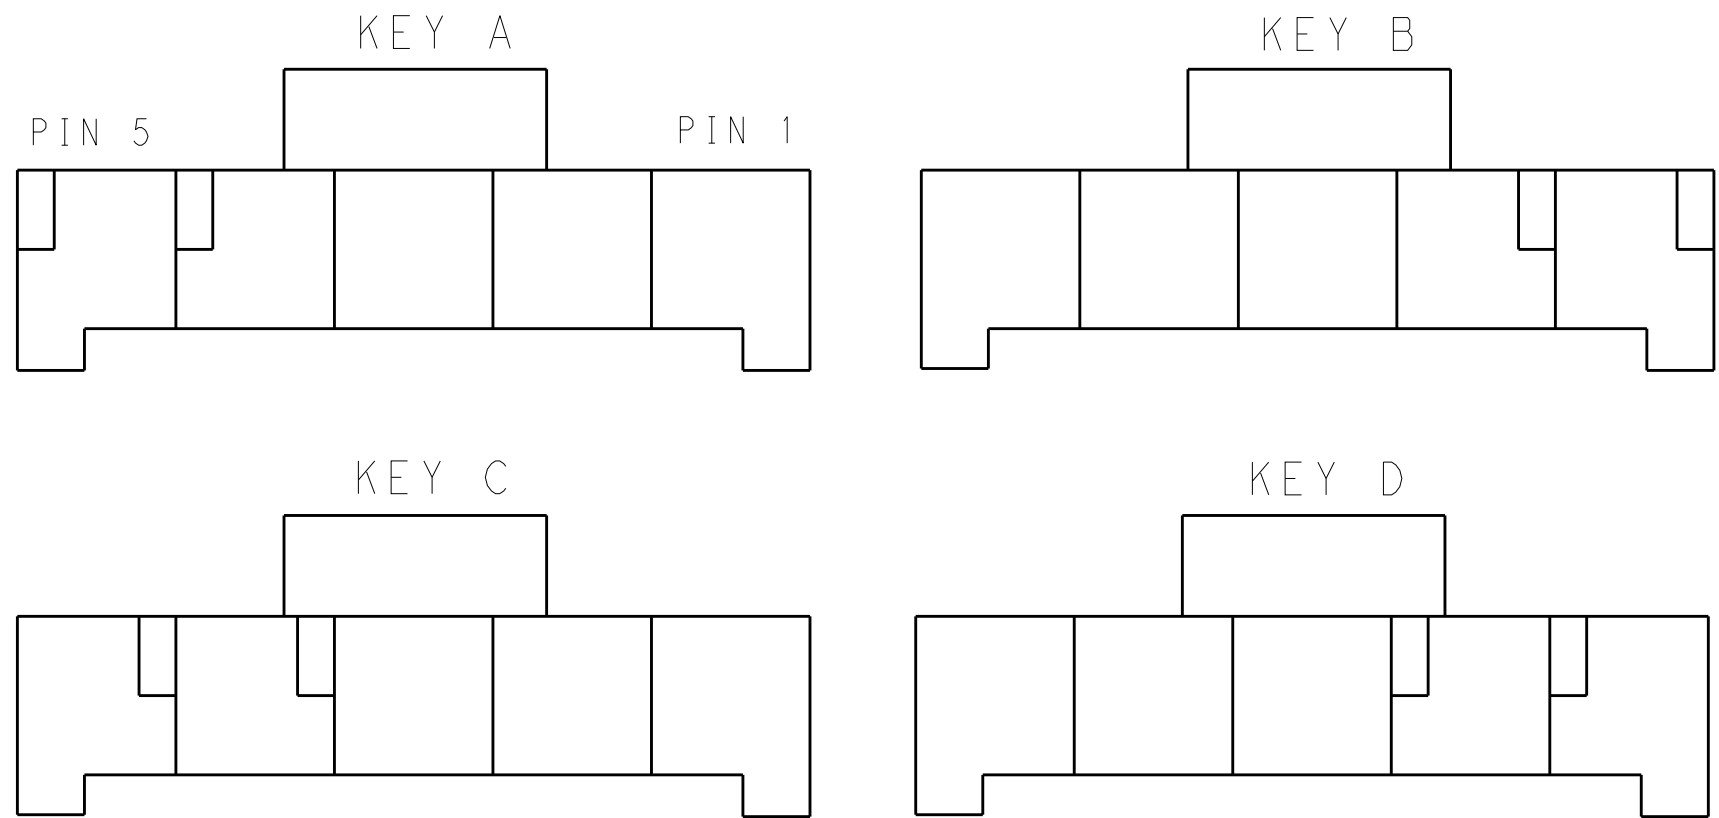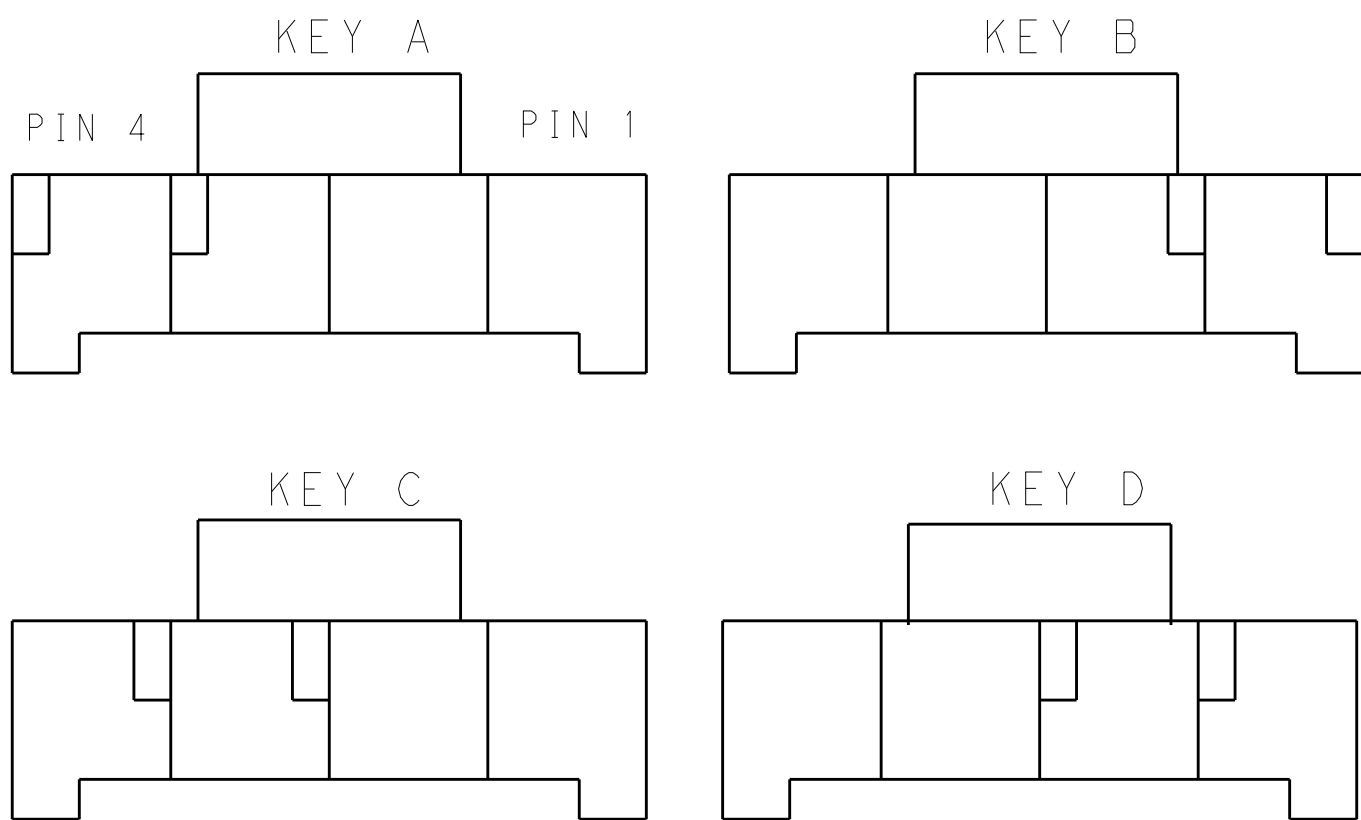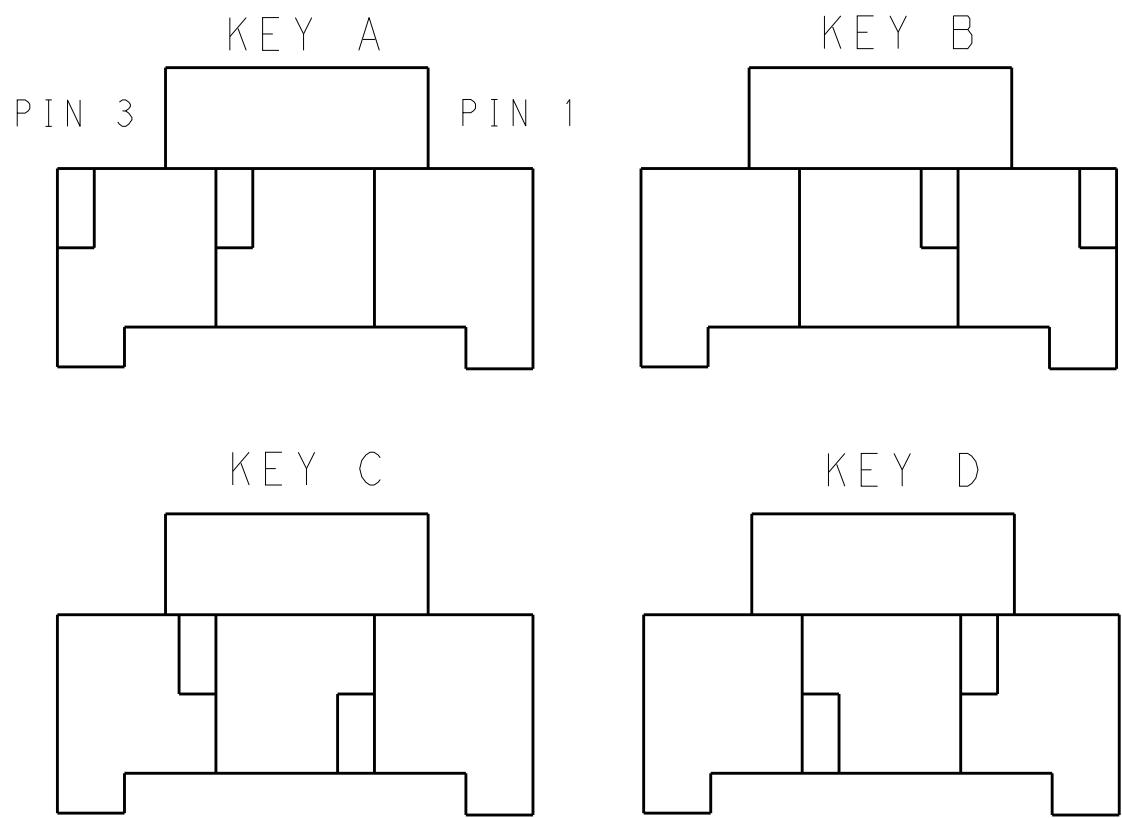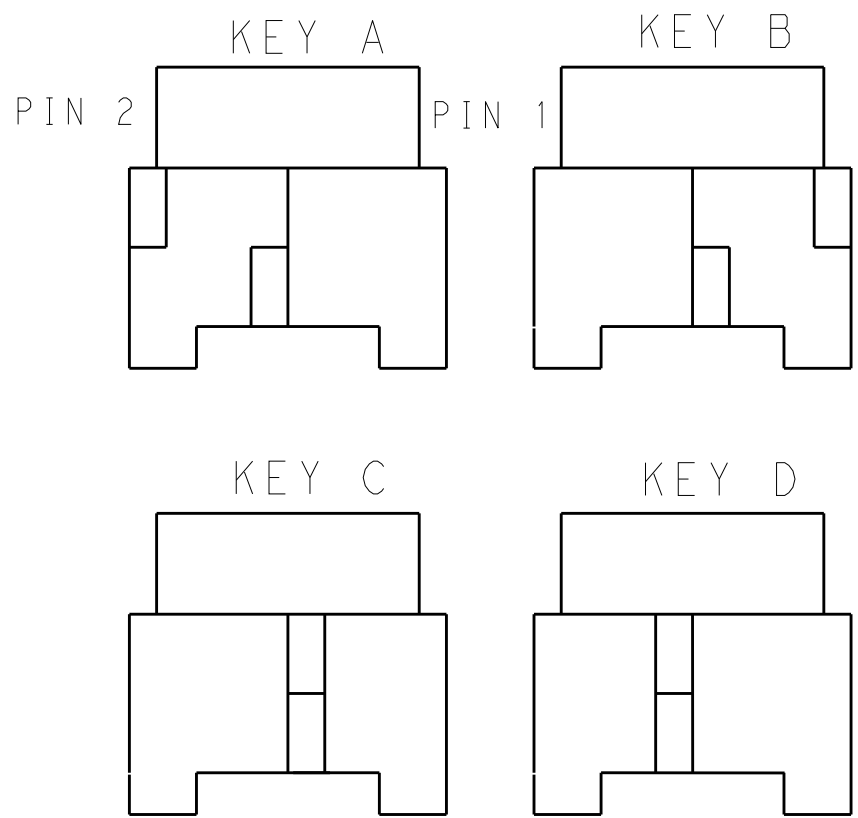


KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232265-7
		BROWN	KEY B	6-2232265-7
		GREEN	KEY C	7-2232265-7
		ORANGE	KEY D	8-2232265-7
1*4	LEVEL B	BLACK	KEY A	1-2232265-3
		DARK GREY	KEY A	5-2232265-4
		BROWN	KEY B	6-2232265-4
		GREEN	KEY C	7-2232265-4
1*3	LEVEL A	ORANGE	KEY D	8-2232265-4
		BLACK	KEY A	1-2232265-2
		DARK GREY	KEY A	5-2232265-3
		BROWN	KEY B	6-2232265-3
1*2	LEVEL A	GREEN	KEY C	7-2232265-3
		ORANGE	KEY D	8-2232265-3
	LEVEL B	DARK GREY	KEY A	5-2232265-2
		BROWN	KEY B	6-2232265-2
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU	26MAR2013	 TE Connectivity		
DIMENSIONS:		CHK	HAPYE WU	26MAR2013			
mm		APVD	YUJHONG MAO	26MAR2013	NAME		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC		
		0 PLC ±.1			108-106118		
MATERIAL		1 PLC ±0.35			APPLICATION SPEC		
		2 PLC ±0.25			114-106118		
SEE TABLE		3 PLC ±.1			WEIGHT		
		4 PLC ±.1			Customer Drawing		
		ANGLES			SIZE		
		FINISH			CAGE CODE		
					DRAWING NO		
					RESTRICTED TO		
					A100779		
					©=2232265		
					SCALE		
					SHEET 2 OF 2		
					REV B2		