


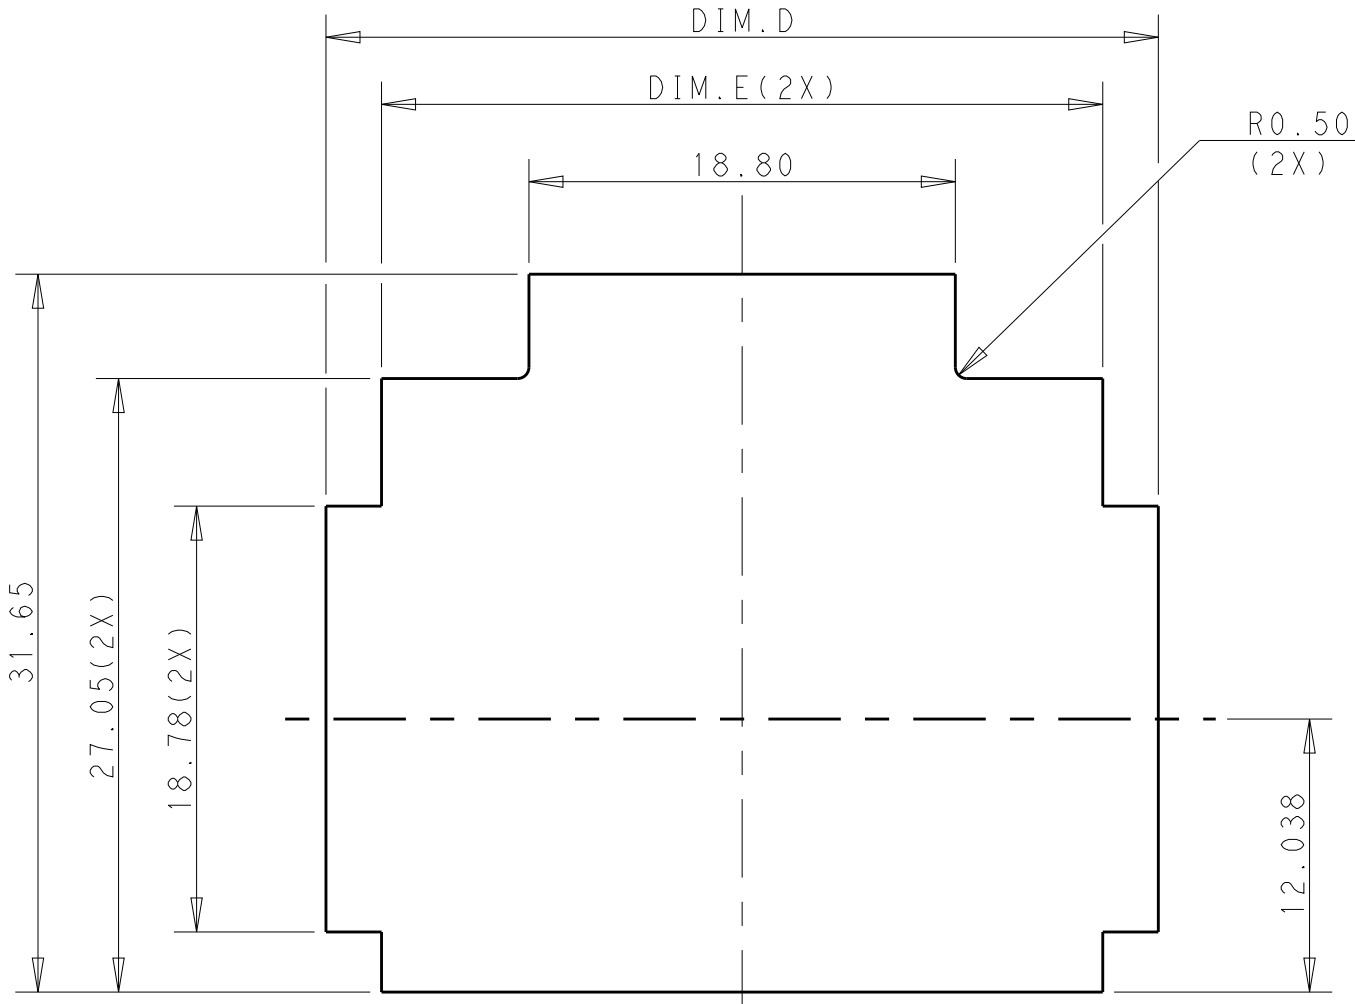
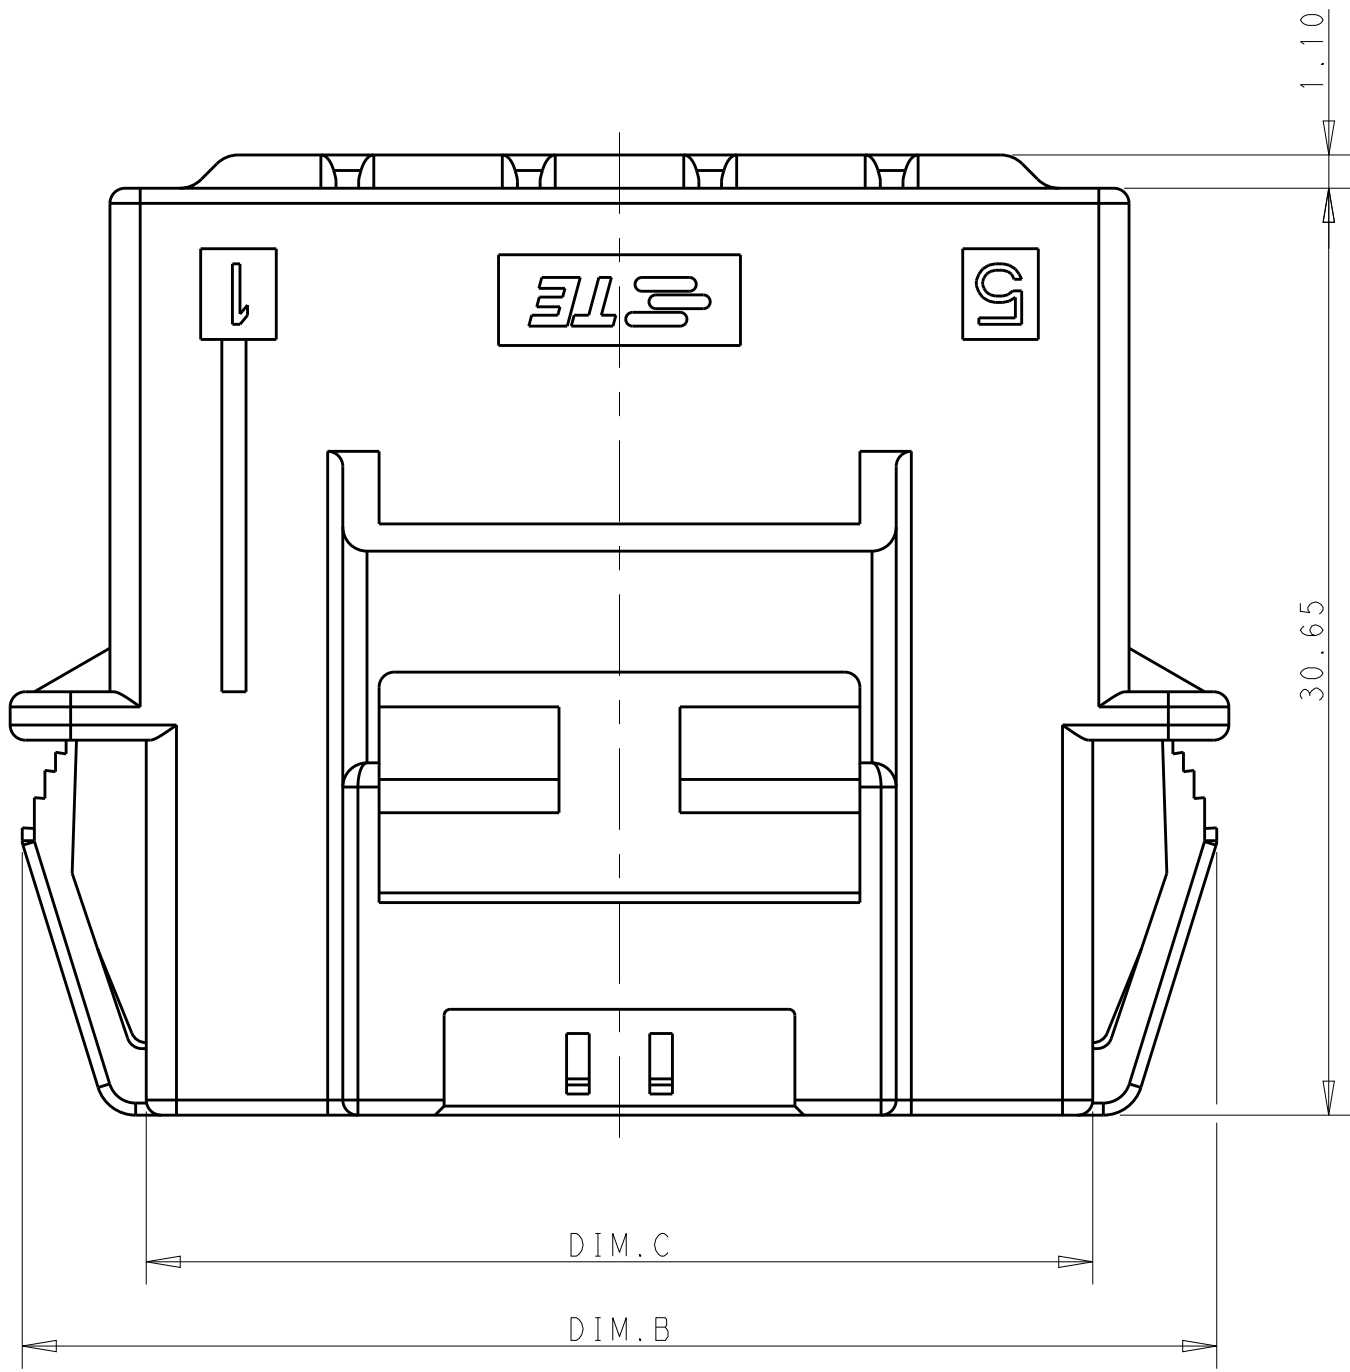
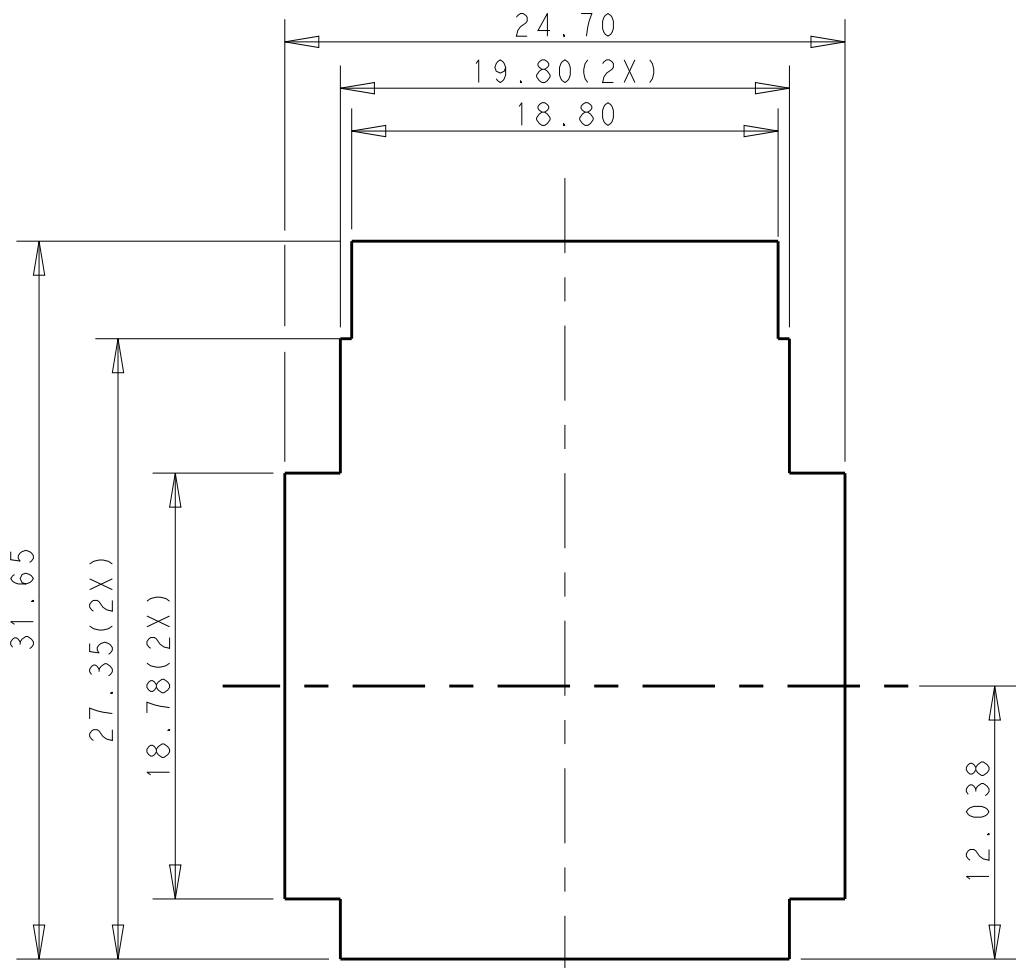
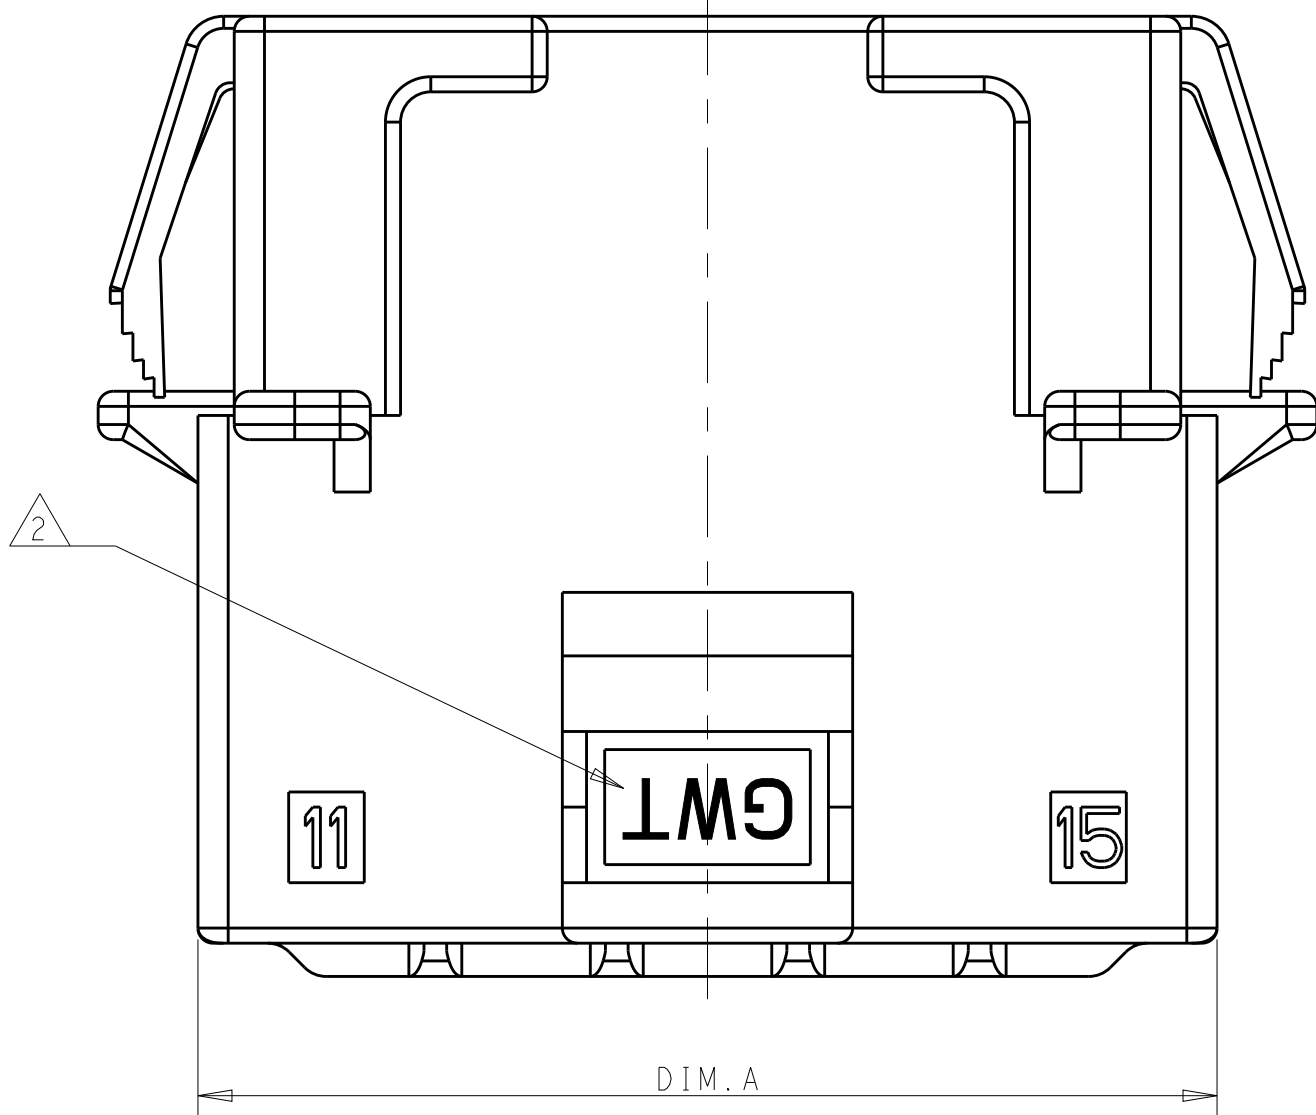


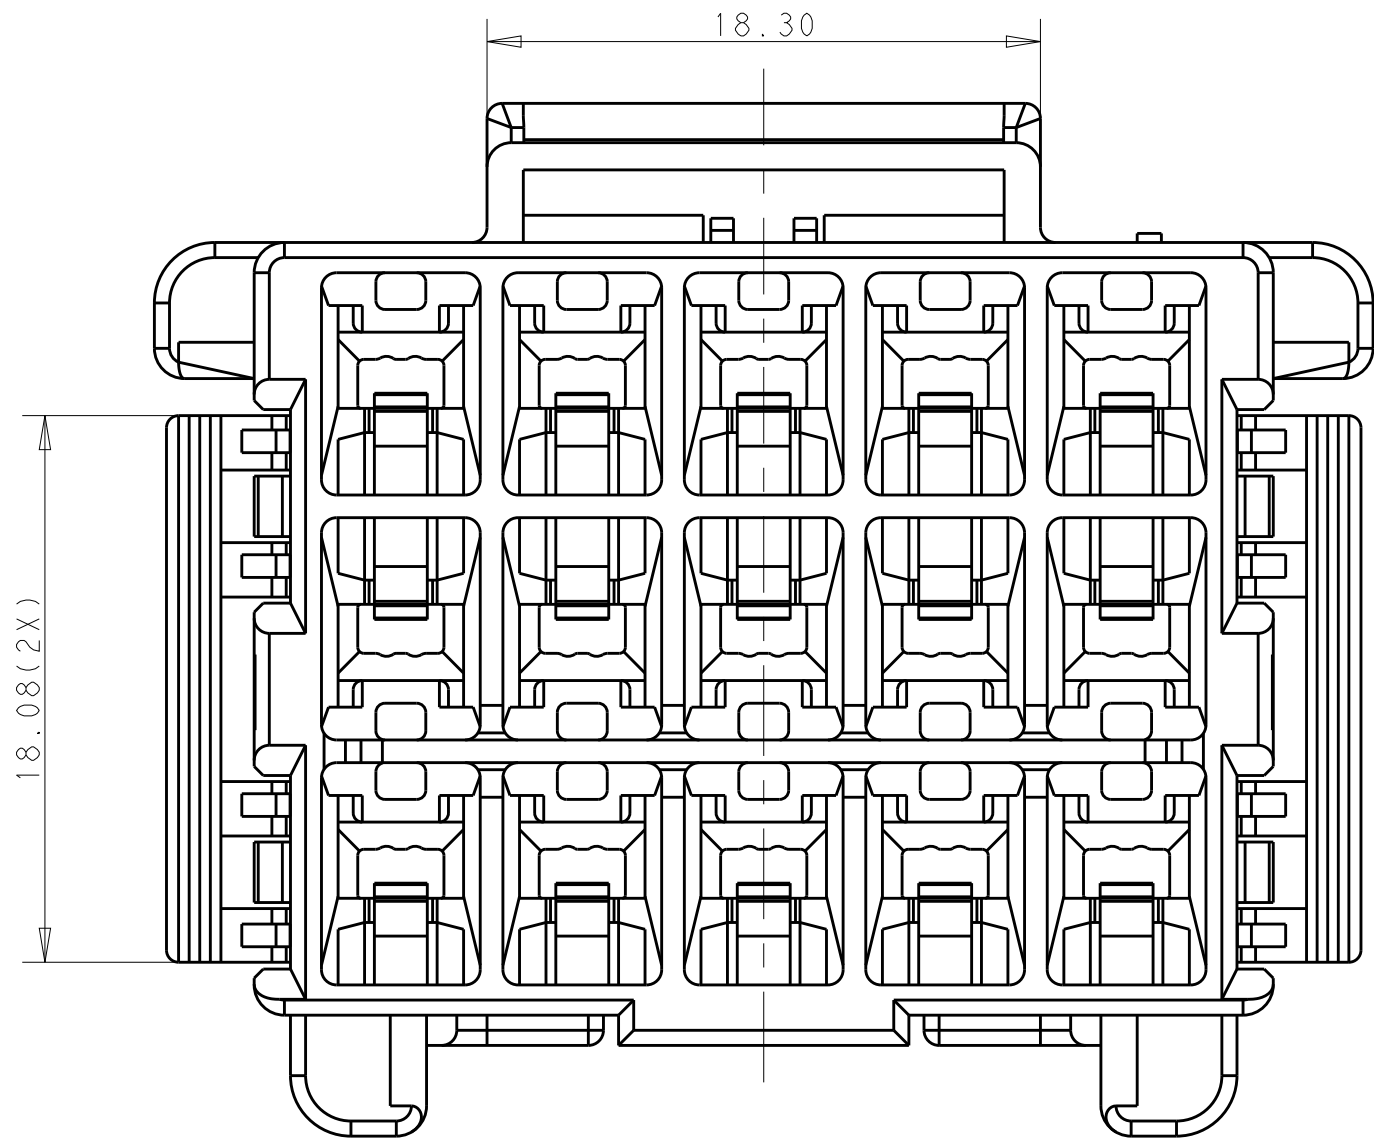

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 3*5 AND 3*4 POSITIONS
(TOLERANCE: ±0.15mm)

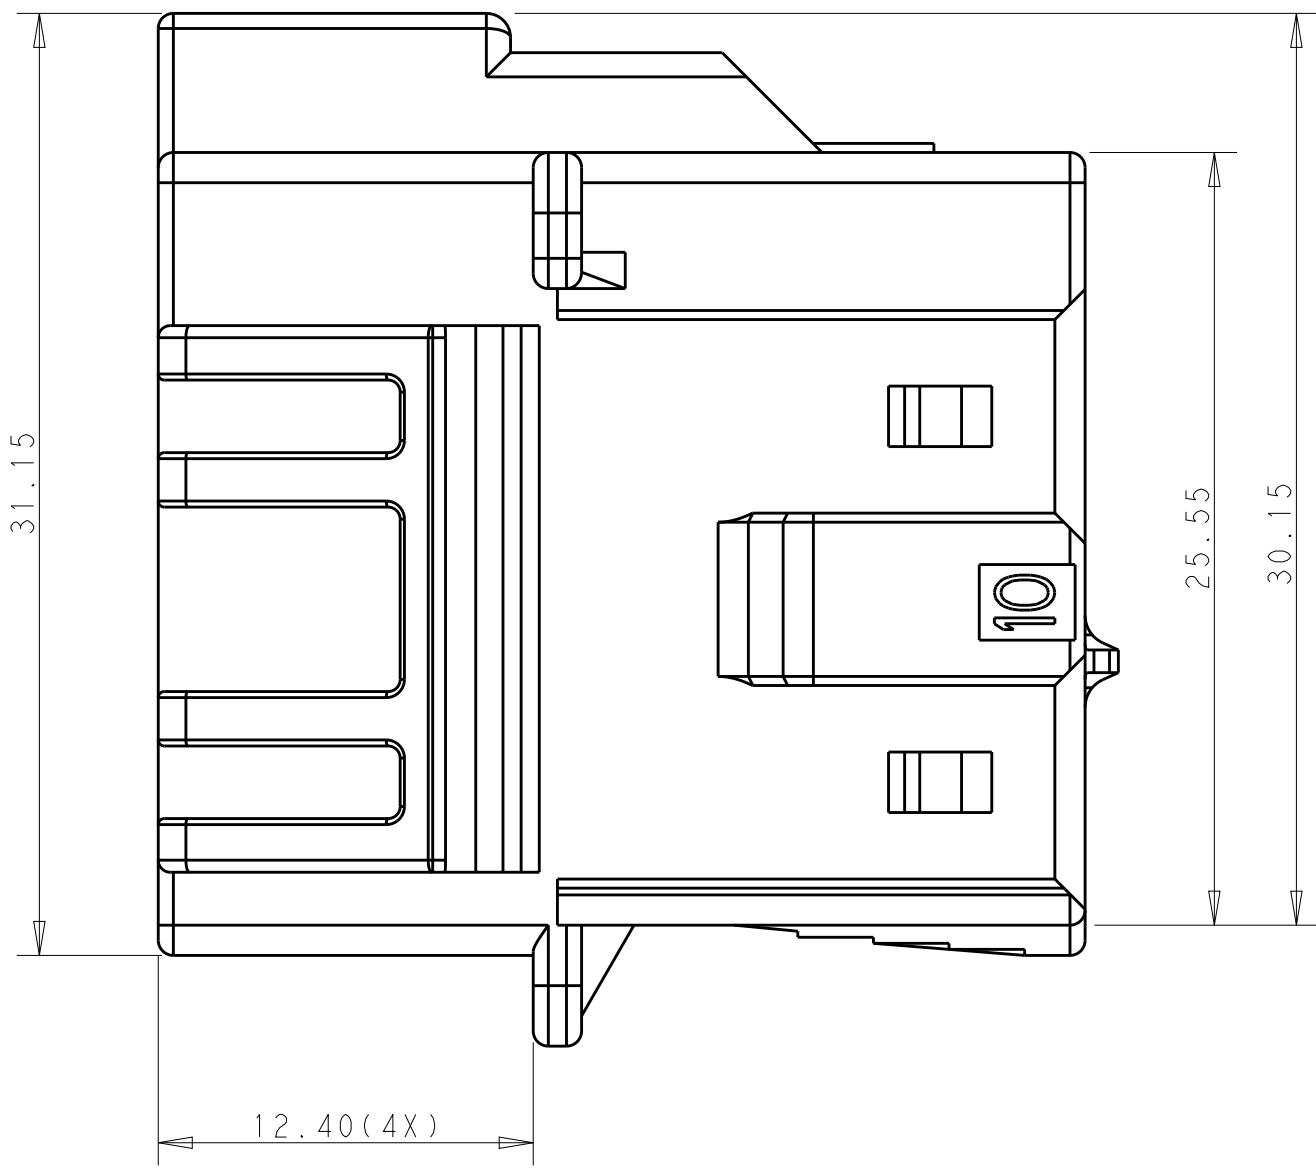

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 3*3 POSITION
(TOLERANCE: ±0.15mm)

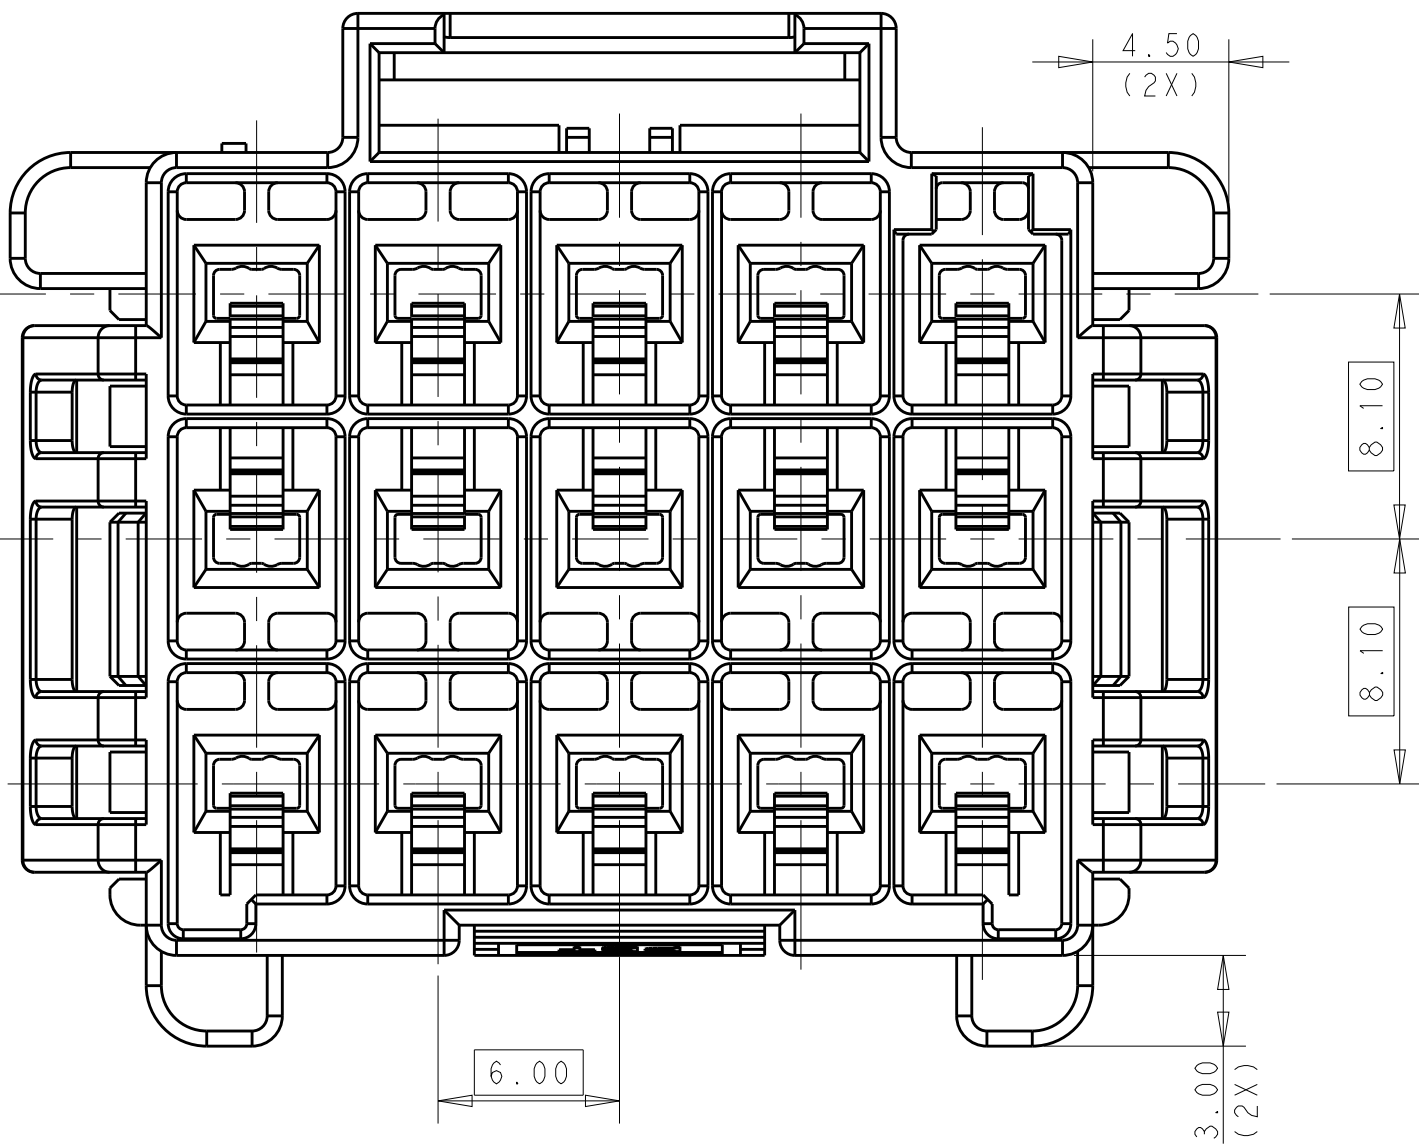







- NOTE
- MATERIAL:
LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0
 - MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT
 - APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*
 - MATING CONN. P/N
PLUG HSG:*-2232357-
DOUBLE ROW LOCK PLATE:*-1971778-*;SINGLE ROW LOCK PLATE:*-1971777-*
 - RECOMMENDED PANEL THICKNESS:1.0~2.0mm

6. This product has not completed validation testing.

POS	A	B	C	D	E
3*5	33.70	39.5	31.30	36.70	31.80
3*4	27.70	33.5	25.30	30.70	25.80
3*3	21.70	27.5	19.30		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY.WU 26MAR2013	TE Connectivity	
DIMENSIONS:		CHK HAPYE.WU 26MAR2013		
mm		APVD YUZHONG.MAO 26MAR2013	NAME CAP HOUSING,PANEL MOUNT,TRIPLE ROW POWER TRIPLE LOCK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
0 PLC ±0.35		108-106118	SIZE CAGE CODE DRAWING NO	
1 PLC ±0.25		APPLICATION SPEC		
2 PLC ±0.25		114-106118	RESTRICTED TO	
3 PLC ±0.25		WEIGHT		
4 PLC ±0.25		Customer Drawing	SCALE 1 OF 2	
ANGLES				
FINISH			REV A2	
MATERIAL				







LOC		DIST		REVISONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

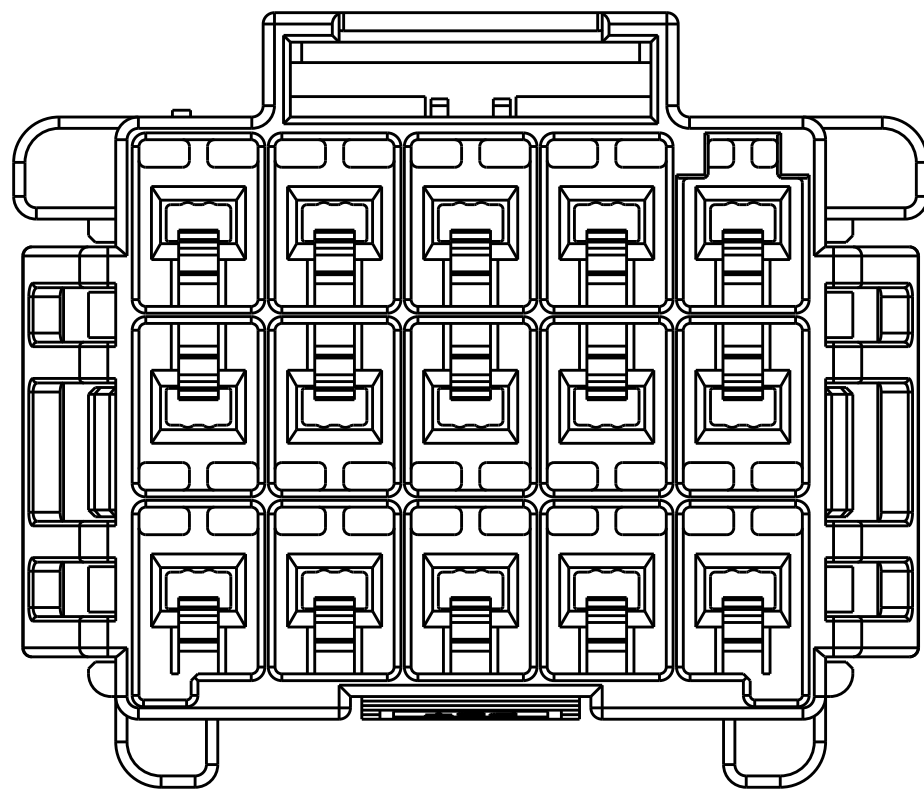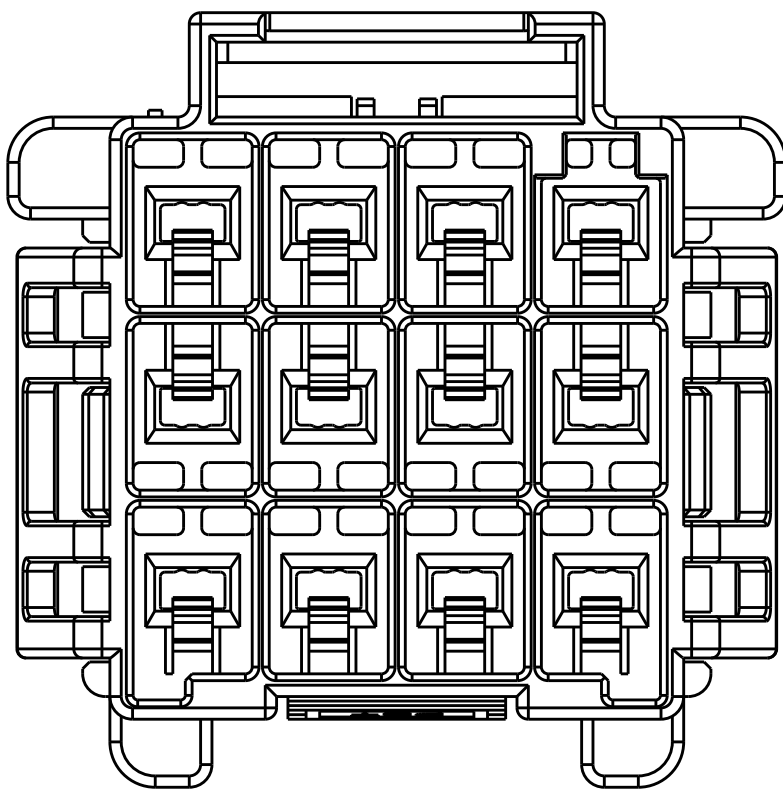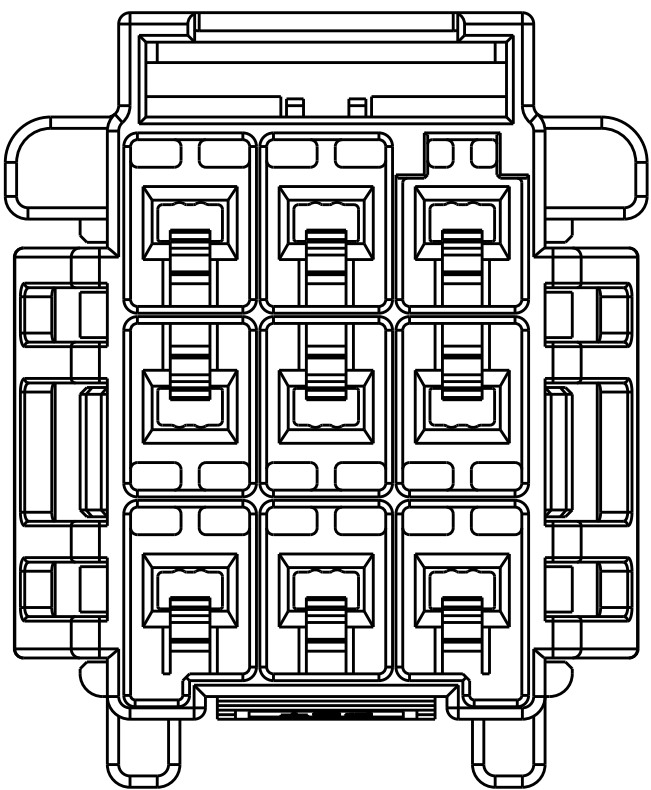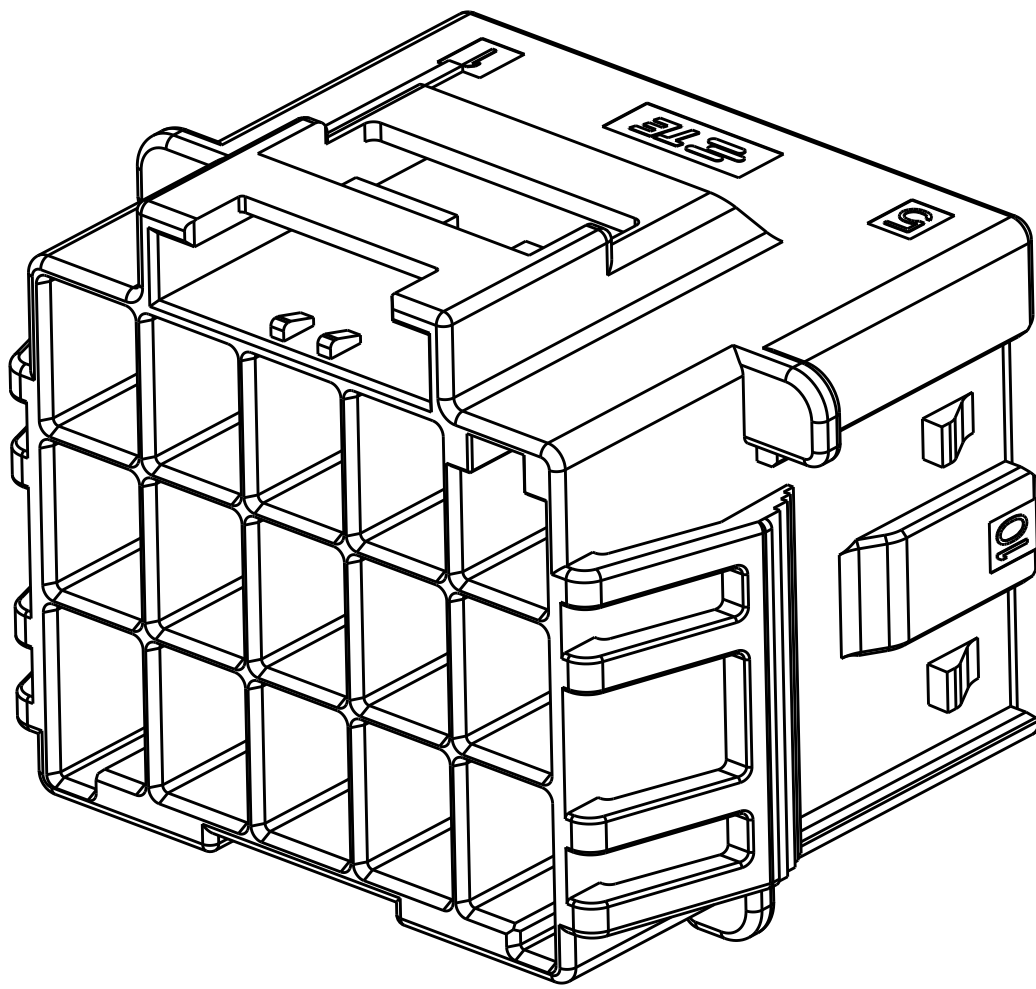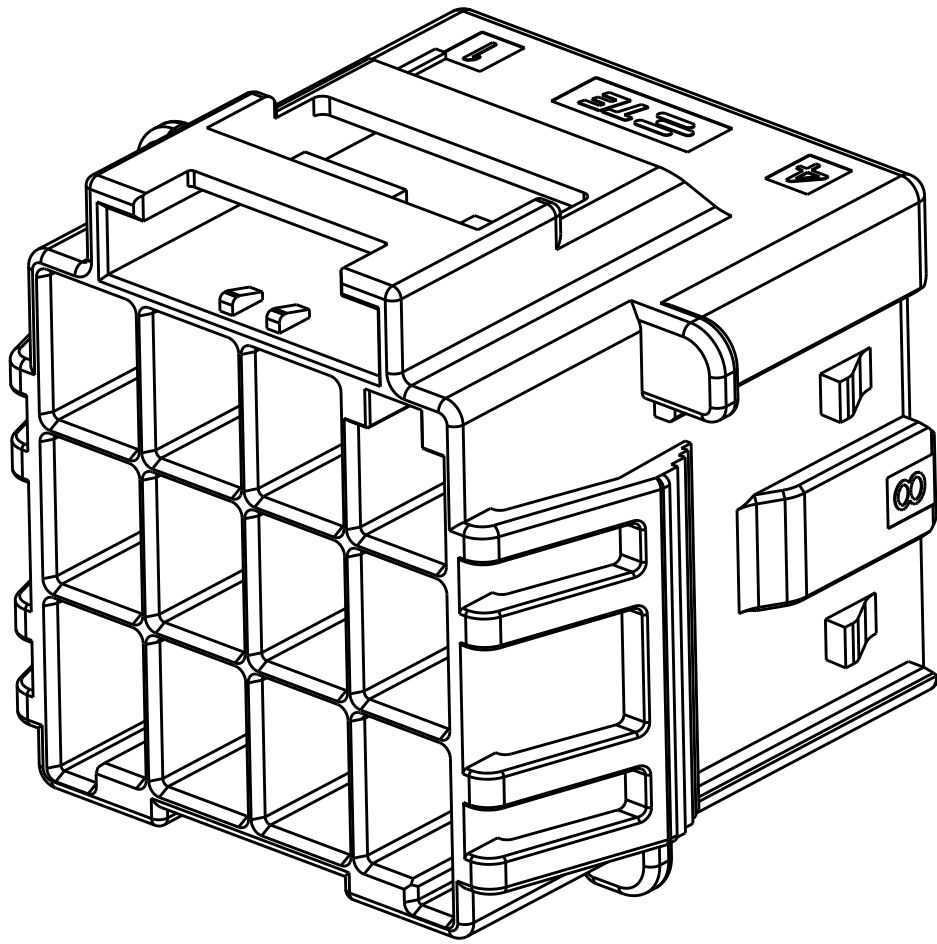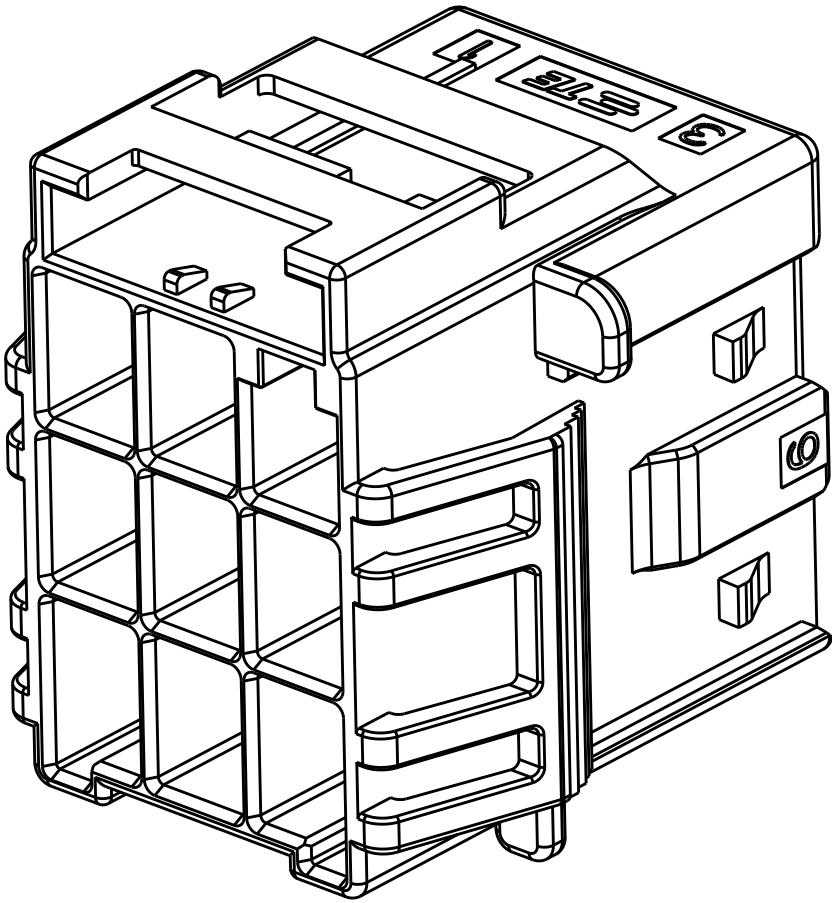

3*3 POSITIONS

3*4 POSITIONS

3*5 POSITIONS

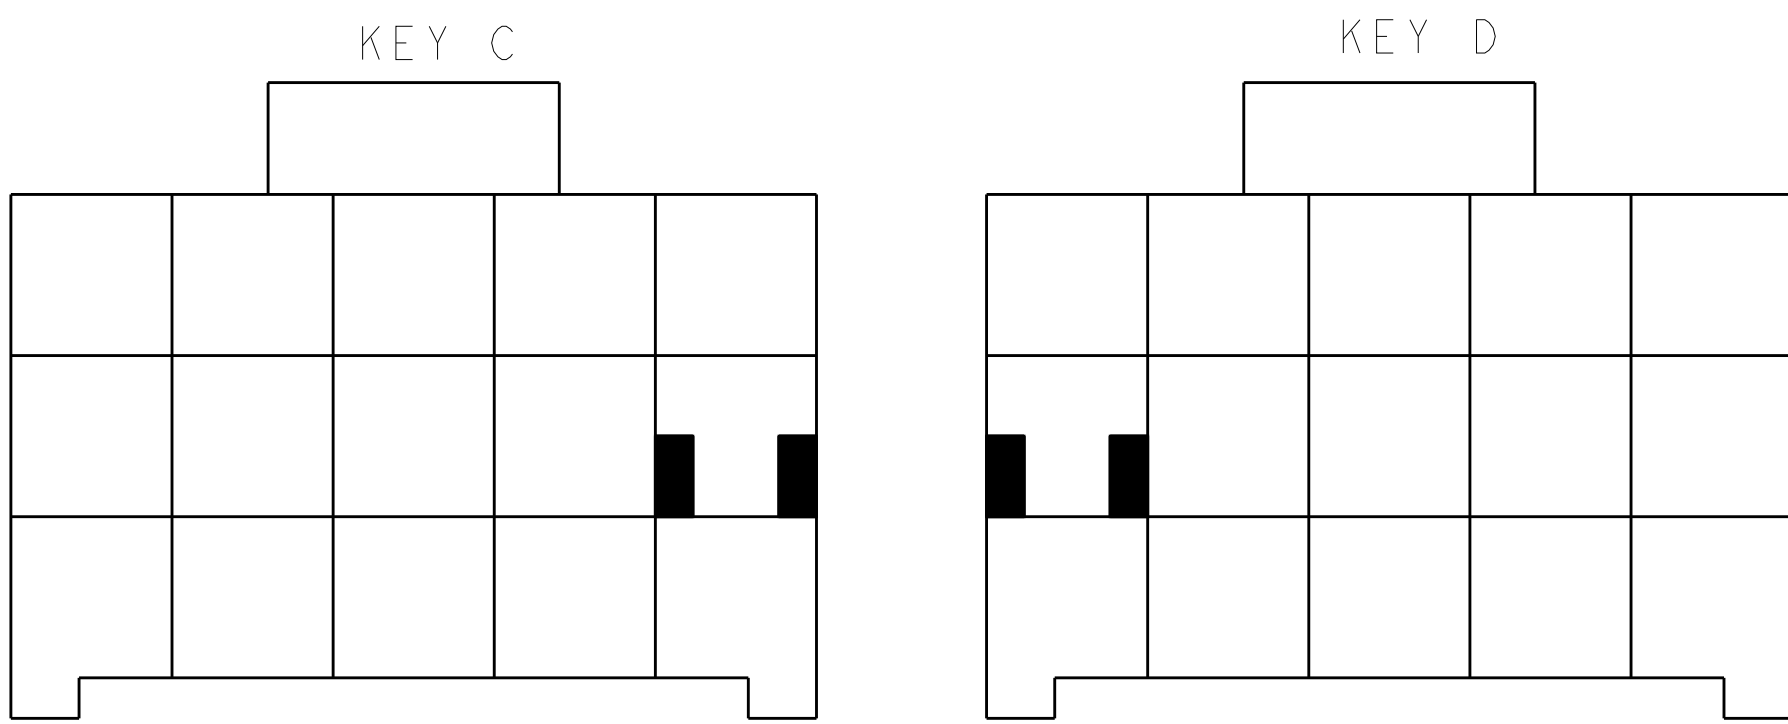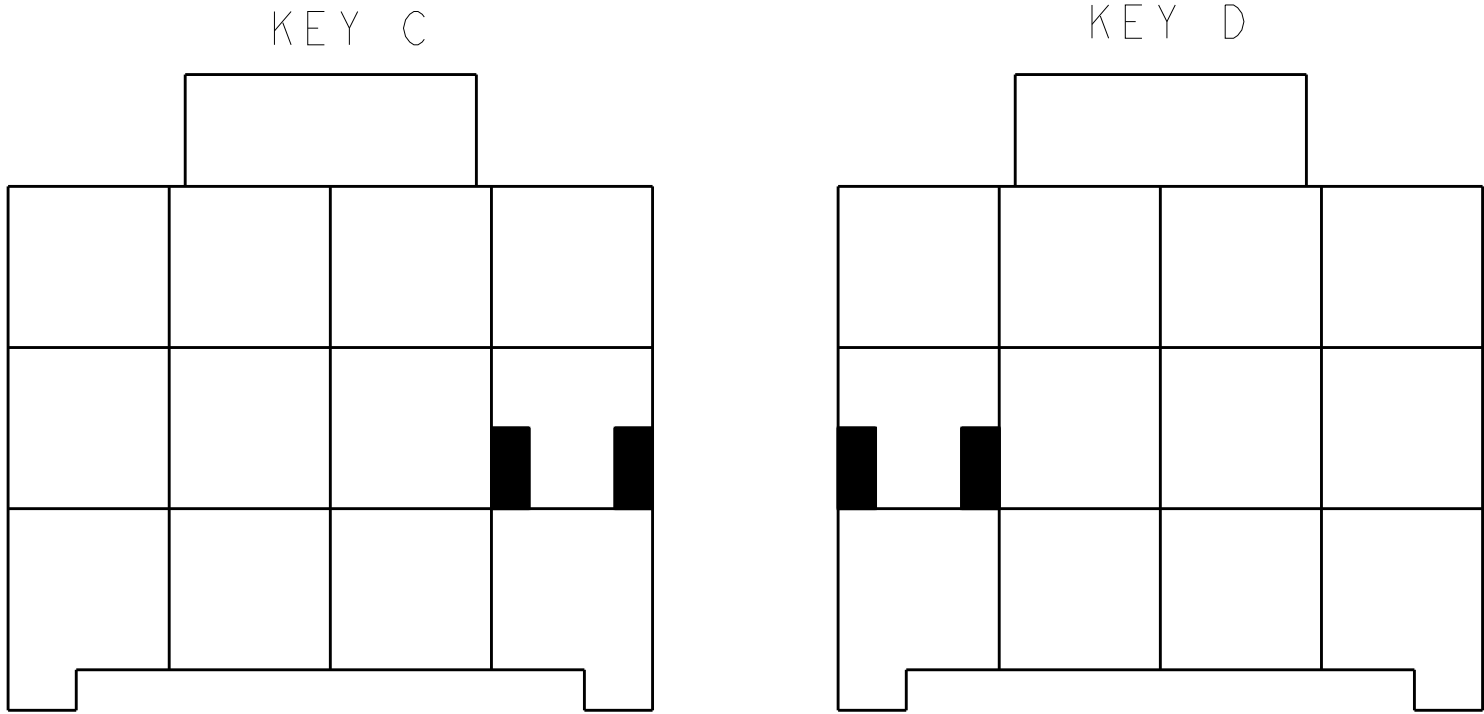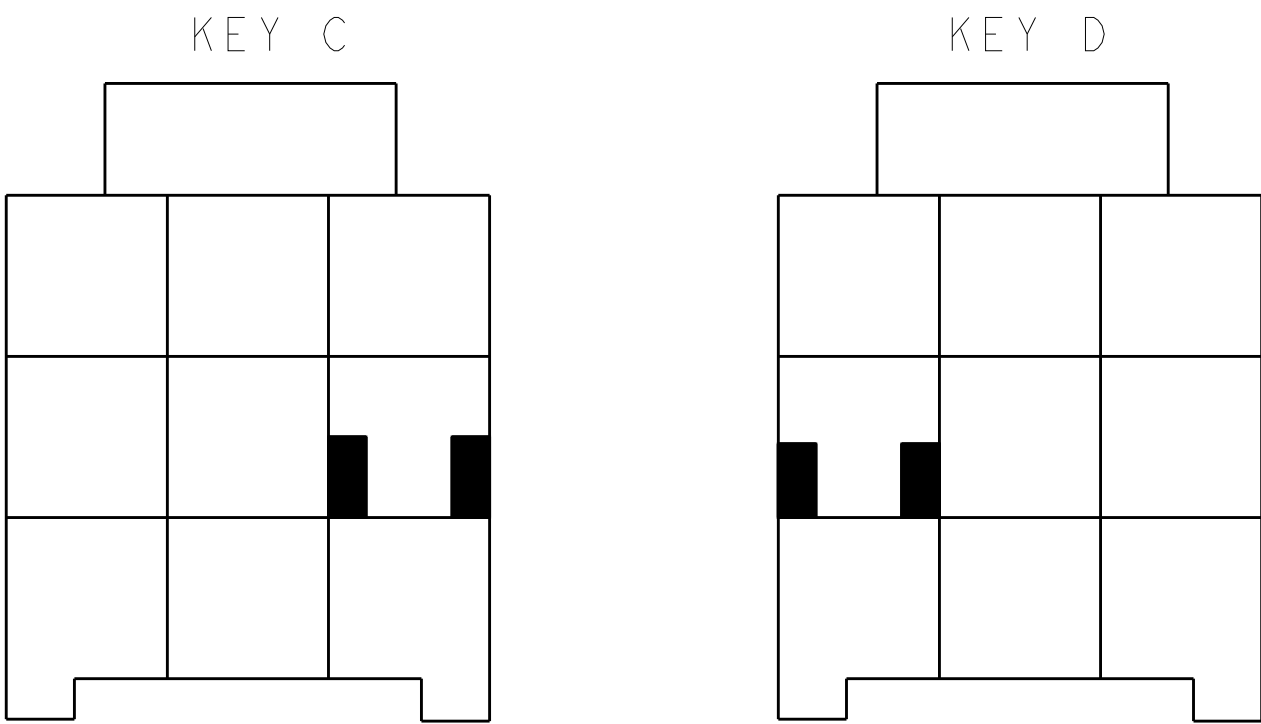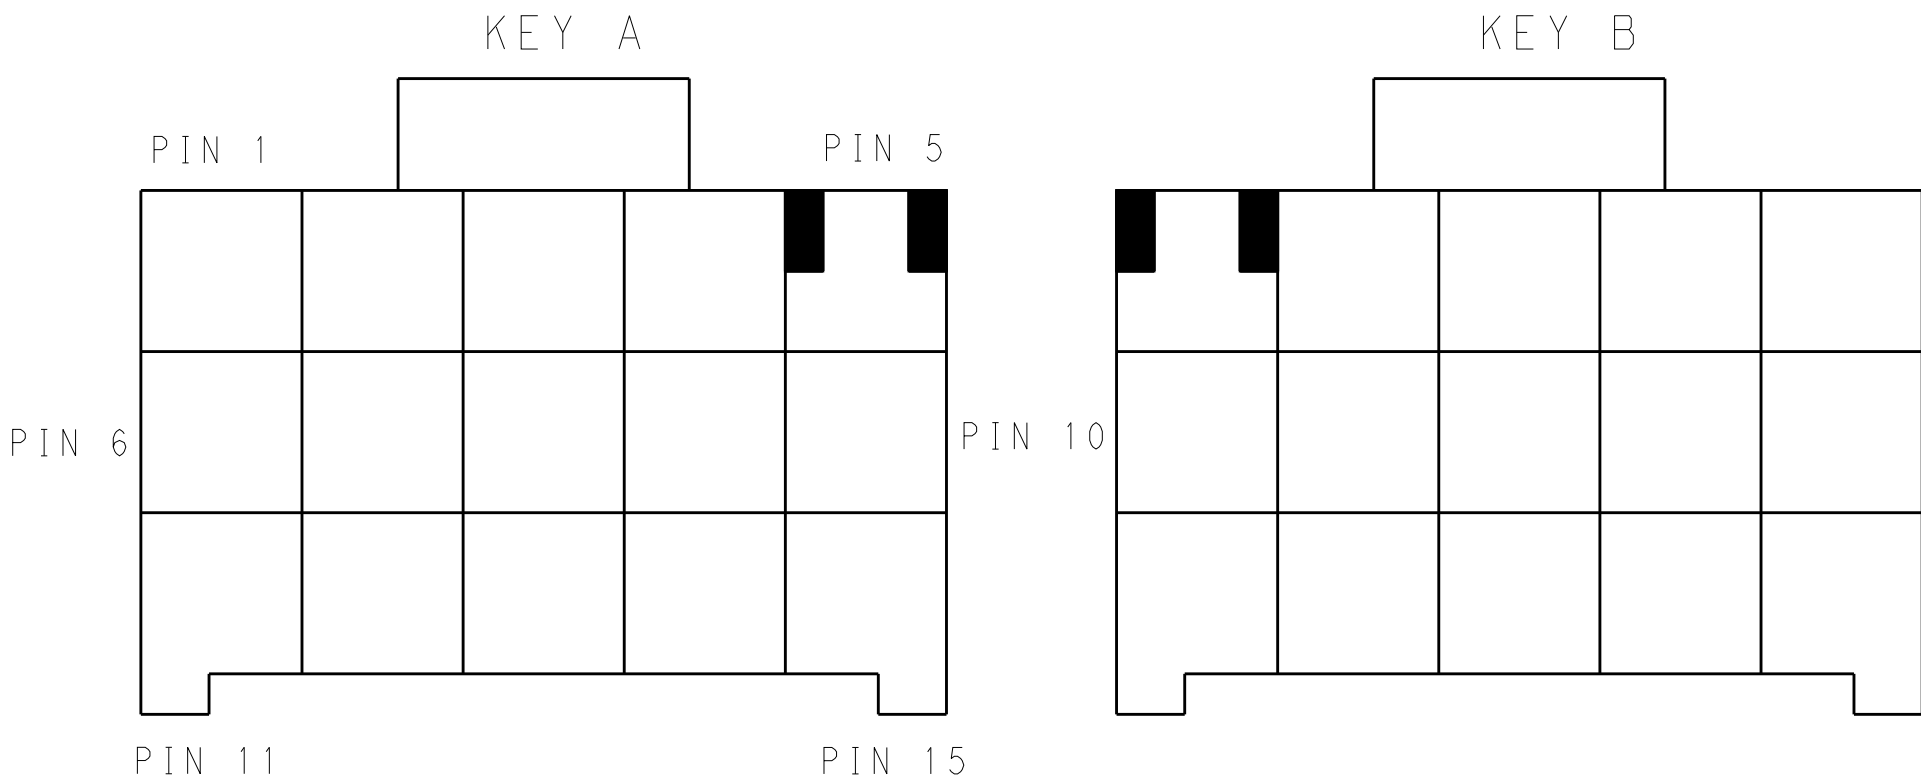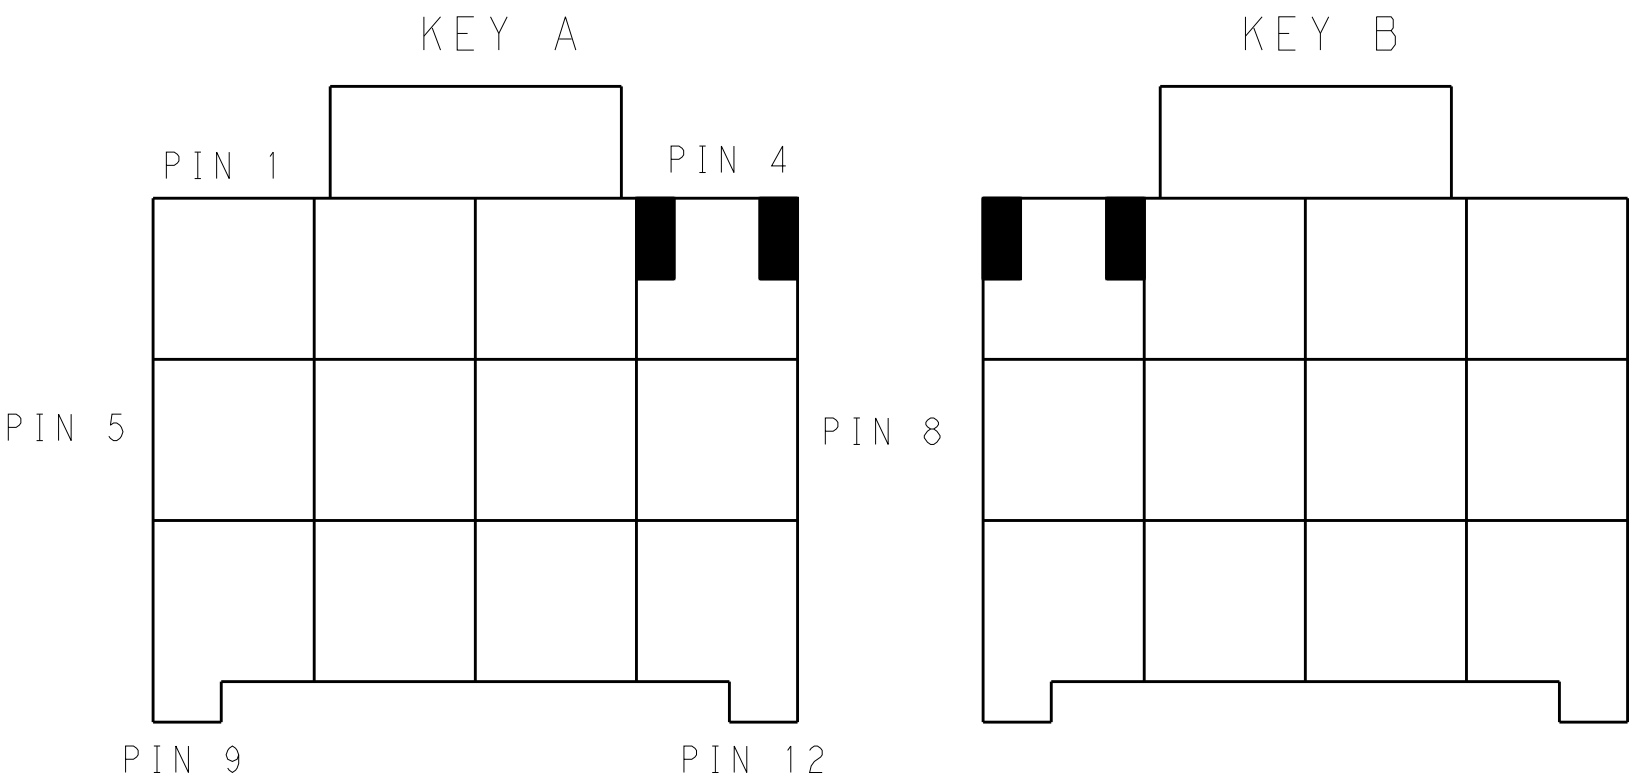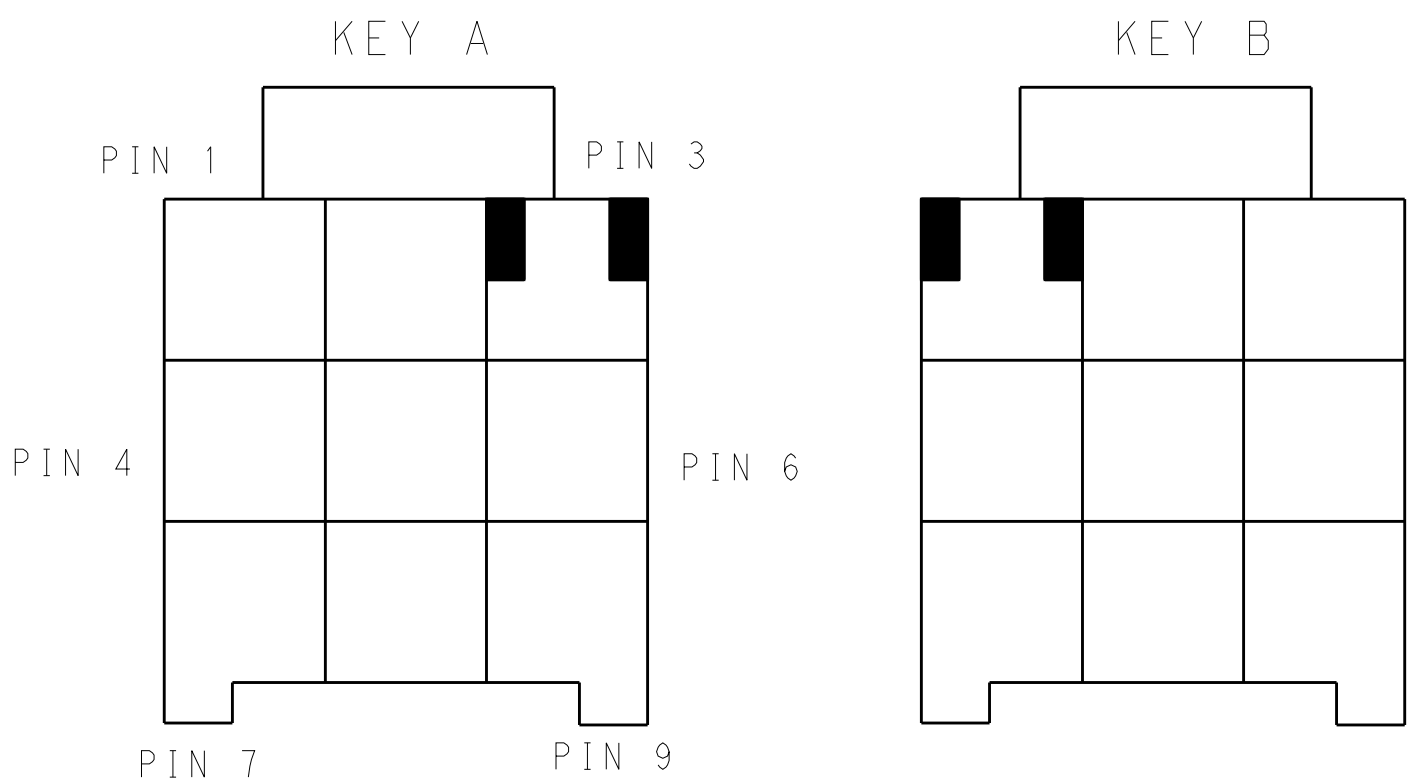

KEYING FOR 3*3 POS.

KEYING FOR 3*4 POS.

KEYING FOR 3*5 POS.

3*5	LEVEL A	DARK GREY	KEY A	5-2232356-7
		BROWN	KEY B	6-2232356-7
		GREEN	KEY C	7-2232356-7
		ORANGE	KEY D	8-2232356-7
3*4	LEVEL A	BLACK	KEY A	1-2232356-5
		DARK GREY	KEY A	5-2232356-4
		BROWN	KEY B	6-2232356-4
		GREEN	KEY C	7-2232356-4
3*3	LEVEL A	ORANGE	KEY D	8-2232356-4
		DARK GREY	KEY A	5-2232356-3
		BROWN	KEY B	6-2232356-3
		GREEN	KEY C	7-2232356-3
POS.	MATERIAL	ORANGE	KEY D	8-2232356-3
		BLACK	KEY A	1-2232356-6
		COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY.WU 26MAR2013

CHK HAPYE.WU 26MAR2013

APVD YUJHONG.MAO 26MAR2013

DIMENSIONS:

mm

0 PLC ±0.35

1 PLC ±0.25

2 PLC ±0.25

3 PLC ±0.25

4 PLC ±0.25

ANGLES ±0.25

FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-106118

APPLICATION SPEC 114-106118

WEIGHT

Customer Drawing

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

TE Connectivity

CAP HOUSING,PANEL MOUNT,TRIPLE ROW

POWER TRIPLE LOCK

A100779

C=2232356

SCALE

SHEET 2 OF 2

REV A2