

CRS07

Angular Rate Sensor

Packaged



A robust and affordable mass-produced miniature gyroscope for applications in which space is critical.

Angular rate sensors are used wherever rate of turn sensing is required without a fixed point of reference. The sensor will output a DC voltage proportional to the rate of turn and input voltage.

High performance motion sensing even under severe shock and vibration.

Whatever your application, the unique silicon ring technology, coupled with closed loop electronics, gives advanced and stable performance over time and temperature, overcoming the mount sensitivity problems experienced with simple beam or tuning fork based sensors.

Unpackaged



Key features

- Ultra-small size
- Excellent performance over temperature
- Repeatable drift characteristic
- High shock and vibration operation
- Available packed or unpackaged
- High rate range option - unpackaged only



CRS07

Angular Rate Sensor




For full technical datasheets please go to our website where the documents can be downloaded

CRS07-02S

Packaged


All dimensions in millimetres

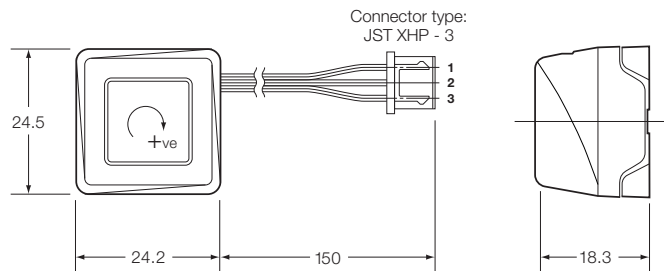

CRS07-11S - 13S

Unpackaged

All dimensions in millimetres

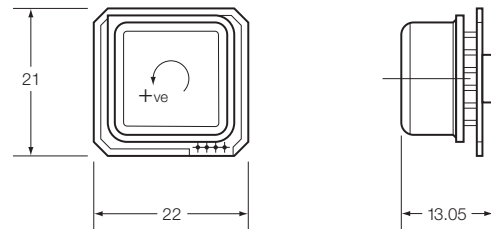

Typical Data

| | CRS07-02S | CRS07-11S | CRS07-13S |
|----------------------------------|---|---------------------------|--------------------------|
| Angular Rate Range | $\pm 100^\circ/\text{s}$ | $\pm 573^\circ/\text{s}$ | $\pm 100^\circ/\text{s}$ |
| Output | Analogue voltage (ratiometric) | | |
| Scale Factor | | | |
| Nominal | 20mV/ $^\circ/\text{s}$ | 3.49mV/ $^\circ/\text{s}$ | 20mV/ $^\circ/\text{s}$ |
| Variation over temperature range | < $\pm 5\%$ | | |
| Non-linearity | < $\pm 0.5\%$ of full scale | | |
| Bias | | | |
| Setting tolerance | < $\pm 3^\circ/\text{s}$ | < $\pm 30^\circ/\text{s}$ | < $\pm 3^\circ/\text{s}$ |
| Variation over temperature range | < $\pm 3^\circ/\text{s}$ | < $\pm 30^\circ/\text{s}$ | < $\pm 3^\circ/\text{s}$ |
| Ratiometric error | < $\pm 1^\circ/\text{s}$ | | |
| Drift vs time | < $\pm 55^\circ/\text{s}$ in any 30s period (after start-up time) | | |
| g sensitivity | < $\pm 0.1^\circ/\text{s/g}$ on any axis | | |
| Bandwidth | 10Hz (-3dB) | > 30Hz (-3dB) | > 10Hz (-3dB) |
| Quiescent Noise | < 1mV rms | | |
| Environment | | | |
| Temperature | -40°C to +85°C | -20°C to +60°C | -40°C to +85°C |
| Linear acceleration | < 100g | | |
| Shock | 200g (1ms, 1/2 sine) | | |
| Vibration | 2g rms (20Hz to 2kHz, random) | | |
| Cross-axis sensitivity | < 5% | | |
| Mass | < 10 gram | | |
| Electrical | | | |
| Supply voltage | +4.75V to +5.25V | | |
| Supply current | < 35mA (steady state) | | |
| Noise and ripple | < 15mV rms (DC to 100Hz) | | |
| Start-up time | < 0.2s | | |
| RoHS Compliant | Yes | | |

Pin Connections

| | |
|----------|-------------|
| 1 | +5V |
| 2 | 0V |
| 3 | Rate Output |
| 4 | Not Used |

Silicon Sensing Systems Limited
Cliffatford Road, Southway,
Plymouth, Devon
PL6 6DE United Kingdom

T +44 (0)1752 723330
F +44 (0)1752 723331
E sales@siliconsensing.com
W siliconsensing.com

Silicon Sensing Systems Japan Limited
1-10 Fuso-Cho,
Amagasaki,
Hyogo 6600891, Japan

T +81 (0)6 6489 5868
F +81 (0)6 6489 5919
E sssj@spp.co.jp
W siliconsensing.com

Specification subject to change without notice.

© Copyright 2013
Silicon Sensing Systems Limited
All rights reserved. Printed in England 07/13

CRS07-00-0100-131 Rev 2
DCR No. 710005023