

 HARTING Pushing Performance	HARTING Product Change Notification	PCN
--	--	------------

Business Unit: HARTING Electric

PI00000199-US

Product Range: Han-Modular®

Date: 03/27/2025

Title: PCN Han M12 Crimp Metal Nut

Details of the Product Changes

1. Concerned Part Numbers

09148811406, 09148811806, 09148812406, 09148812806

2. Description of Changes/News

The outer diameter and material of the cable gland metal nut will be modified.


- Reduction of the nut outer diameter from 14.5 to 14.0 mm.
- Change of the material from brass, nickel plated to stainless steel without plating.



3. Impact on Product Specification

The change has no impact on the mechanical robustness and electrical signal transmission.

This improvement enables isolation between the two M12 connector shieldings such that there is no electrical contact. The gap between the nuts will be increased by 0.5 mm from 0.3 to 0.8 mm.

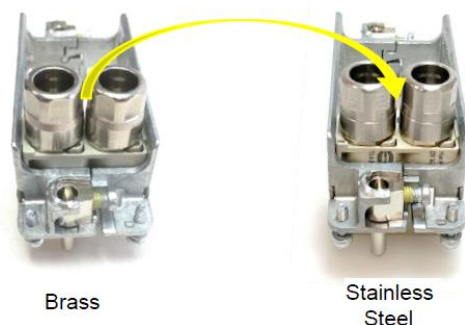

In case of questions or concerns, please do not hesitate to contact our technical support.

Technical Support E-mail: TechSupportUS@HARTING.com

Technical Support Phone Number: 866-278-0306 (Select option 1 for technical support)

 HARTING Pushing Performance	HARTING Product Change Notification	PCN
--	--	------------

4. Scheduled Date of Implementation
November 2025
5. Identification of Change
The revision level of all four part numbers will be increased from 01 to 02
6. Datasheet
For updated specifications and drawings, please check the eCatalogue.

In case of questions or concerns, please do not hesitate to contact our technical support.

Technical Support E-mail: TechSupportUS@HARTING.com

Technical Support Phone Number: 866-278-0306 (Select option 1 for technical support)