


Customer Information Sheet


DRAWING No.: M300-2250396F2 IF IN DOUBT - ASK NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm




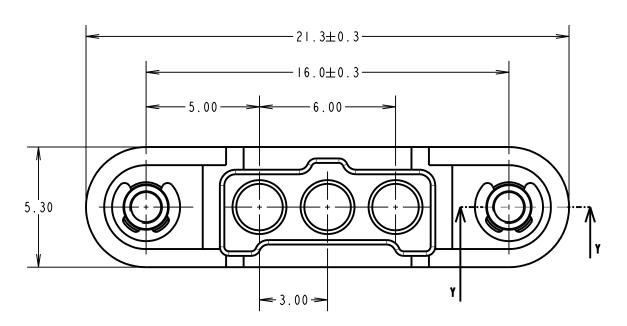

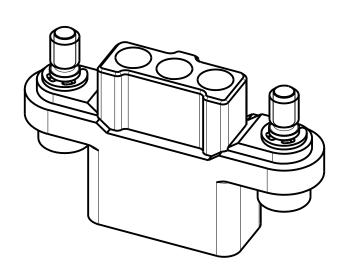

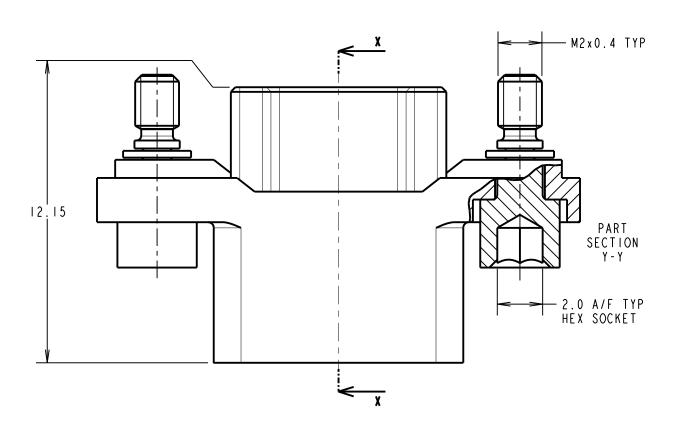

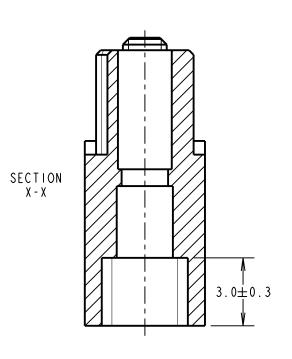

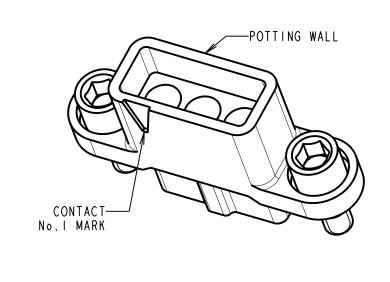

30.03.15 DATE ISS.

APPROVED: MGP CHECKED:

DRAWN: MARK G PLESTED

CUSTOMER REF.:

ASSEMBLY DRG:

www.harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT

X. = ±1mm $X.X = \pm 0.50 mr$ $X.XX = \pm 0.10$ mm $(.XXX = \pm 0.01$ mm

TOLERANCES

MATERIAL:

SEE ABOVE

TITLE: IMM POWER CONNECTOR SIL CRIMP HOUSING WITH POTTING WALL FEMALE ASSEMBLY

INSTRUCTION SHEET IS-01. STRIP WIRE BY 2.00mm FOR CRIMPING. 4. RECOMMENDED MATING PIN SIZE = \emptyset 1.05-0.90mm.

FINISH: SEE ABOVE ANGLES = ±5° M300-2250396F2 technical@harwin.com S/AREA:

I. FOR USE WITH M300-0010045 & M300-0020045 CONTACTS (NOT INCLUDED). M300-0010045 CONTACTS ARE SUITABLE FOR WIRE GAUGE 18 & 20 AWG. MAXIMUM INSULATION DIAMETER Ø1.80mm. M300-0020045 CONTACTS ARE SUITABLE FOR WIRE GAUGE 22 AWG.

MAXIMUM INSULATION DIAMETER ∅1.40mm.

BS3G210 TYPE A WIRE RECOMMENDED.
RECOMMENDED CRIMP TOOL = M22520/2-01, POSITIONER = Z80-058, 3. FOR INSTRUCTIONS ON HAND CRIMP TOOL M22520/2-01, SEE