FO-50360-L

CW-B8665

REV	DOCUMENT	CHANGED BY	CHECK
6	206135	TSM 1 AUG 02	SAV

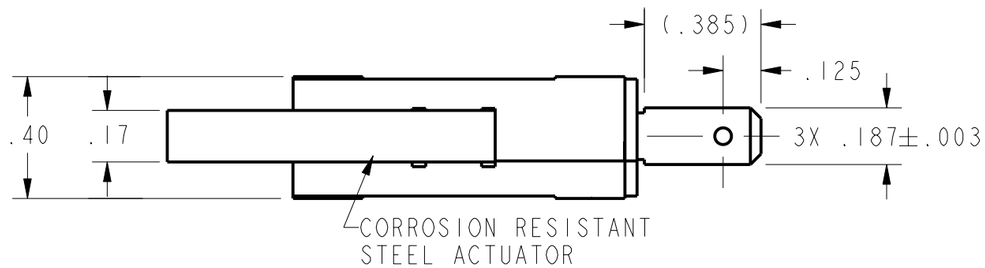

NOTES
1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

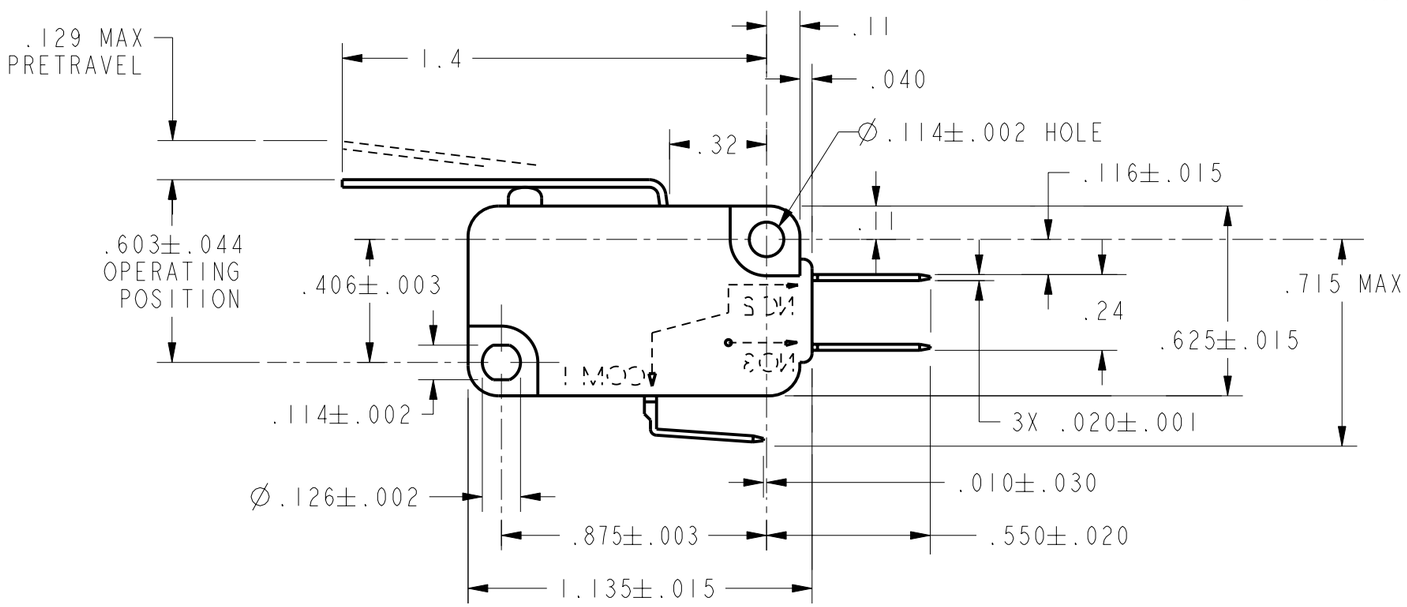

CHARACTERISTICS	
OPERATING FORCE	41 GRAMS MAX
RELEASE FORCE	3 GRAMS MIN
DIFFERENTIAL TRAVEL	.028 MAX
OVERTRAVEL	.071 MIN
RELEASE TRAVEL	.017 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L142
0.1A 125 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	TSM	1 AUG 02
CHECK	SAV	1 AUG 02

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-2S17D8-022	6

SCALE 2:1 | WEIGHT | SHEET 1 OF 1