NOTES:

1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY - BRASS, NICKEL PLATING

CONTACT — BRASS, GOLD PLATING INSULATOR — PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. FREQUENCY RANGE: DC 0-11 GHz

C. VSWR(RETURN LOSS): 1.3, MAX.

D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.


3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.


B. TEMPERATURE RANGE: - 65°C to +165°C

4. SEE AMPHENOL SPEC. 349-50586 FOR CABLE STRIPPING


AND ASSEMBLY INSTRUCTIONS

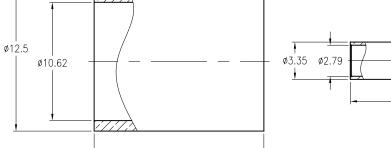



--- 15.24 --



THIRD ANGLE PROJ.

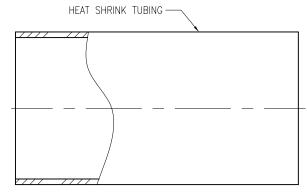



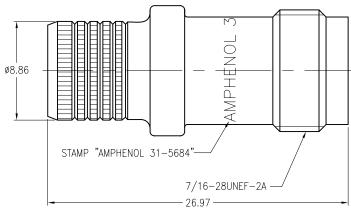

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ±0.1mm ±0.2mm ±0.3mm ±1°.	MATERIAL	DRAWN M.ZHANG	DATE 04-Nov-10	(FOR BELDEN 9913 CABLE)		Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com DRAWING NO. 31-5684	
NOTICE — These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, pracess or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	engineer N.CAO	DATE 22-Apr-03				
		APPROVED	DATE				
		S.HSIEH	04-Nov-10	SCALE: 3/1	SHEET	2 OF 2	ITEM NO.
		CAD FILE F:\DWG\CNPD\31\5684-GSZ		DWG SIZE B	CODE ID 74868	REV G	PART NO.