NOTES: I. MATERIALS AND FINISHES: BODIES, SHELL, WASHER & SPACER - BRASS, NICKEL PLATING CONTACT - BRASS, GOLD PLATING CONTACT - PHOSPHOR BRONZE, GOLD PLATING INSULATORS - PTFE, NATURAL GASKET - SILICONE RUBBER, RED SPRING - BeCu, NICKEL PLATING OUTER CONTACT - PHOSPHOR BRONZE, NICKEL PLATING FERRULE - COPPER, NICKEL PLATING A. IMPEDANCE: 50 OHM B. FREQUENCY RANGE: DC - 4 GHz 3. MECHANICAL: A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING: A. QUANTITY: SINGLE PACK

B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 31-316, AND DATE CODE"

THIRD ANGLE PROJ.

REV DESCRIPTION DATE ECO APPR

U COD SHEET ADDED 01-Jun-15 50436 SH

 CABLE ASSEMBLY INSTRUCTIONS: A. TRIM CABLE AS SHOWN.


B. SLIDE FERRULE.INSULATOR & SPACER ONTO THE CABLE.

C. WHEN CRIMP CONTACT TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944(M22520/5-01) AND DIE SET 227-1221-09 CAVITY B (M22520/5-09 CLOSURE B) (0.068" HEX)


D. WHEN CRIMP FERRULE TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944(M22520/5-01) AND DIE SET 227-1221-09 CAVITY A (M22520/5-09 CLOSURE A) (0.178" HEX)

 HEAT SHRINK TUBE (THERMO FIT), SUPPLIED ON REQUEST ONLY (68180-1).

7> SHOWS CABLE ENTRY DIMENSIONS.

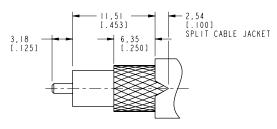

RECOMMENDED CABLE STRIPPING DIMENSIONS

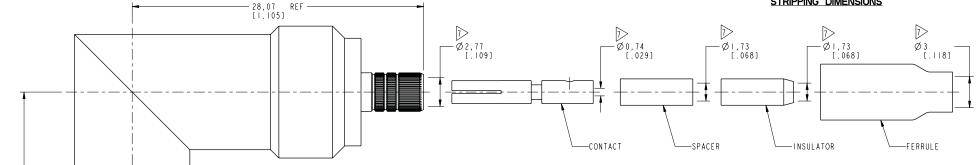

24,02 REF
[.946]


STAMP "AMPHENOL 31-316"

AMPHENOL 31-316

O 13,84 REF
[.545]

INTERFACE PER
BNC PLUG

THIS CONNECTOR IS COVERED BY U.S. PATENT 3,439,294



CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL SEE NOTES	DRAWN M. DONG	DATE 25-May-15	TITLE — BNC RA PLUG FOR	T
	ENGINEER O MCPHERSON	DATE 17 - Jul - 07	RG 174 & 188/U CABLE	
REFERENCE FAR # AND	APPROVED	DATE	MIL-CRIMP	_[
CONFIGURATION LEVEL: In Work	S. HSIEH	25-May-15	SCALE: 4.0:1.0 SHEET 2 OF 2	
	CAD FILE		DWG SIZE REV	7
FINISH			l B I II	. ∏F

Amphenol RF
www.amphenolrf.com

DRAWING NO.31-316

ITEM NO.31-316

PART NO.31-316