

## High Performance 24-bit, 192kHz Stereo DAC

### DESCRIPTION

The WM8716 is a high performance stereo DAC designed for audio applications such as CD, DVD, home theatre systems, set top boxes and digital TV. The WM8716 supports data input word lengths from 16 to 24-bits and sampling rates up to 192kHz. The WM8716 consists of a serial interface port, digital interpolation filter, multi-bit sigma delta modulator and stereo DAC in a small 28-lead SSOP package. The WM8716 also includes a digitally controllable mute and attenuator function on each channel.

The internal digital filter has two selectable roll-off characteristics. A sharp or slow roll-off can be selected dependent on application requirements. Additionally, the internal digital filter can be by-passed and the WM8716 used with an external digital filter.

The WM8716 supports two connection schemes for audio DAC control. The SPI-compatible serial control port provides access to a wide range of features including on-chip mute, attenuation and phase reversal. A hardware controllable interface is also available.


### FEATURES

- 112dB SNR ('A' weighted @ 48kHz), THD: -97dB @ -1dB FS
- Sampling frequency: 8kHz to 192kHz
- Selectable digital filter roll-off
- Optional interface to industry standard external filters
- Differential mono mode
- Input data word: 16 to 24-bit
- Hardware or SPI compatible serial port control modes:
  - Hardware mode: mute, de-emphasis, audio format control
  - Serial mode: mute, de-emphasis, attenuation (256 steps), phase reversal
- Compatible upgrade to PCM1716

### APPLICATIONS

- CD, DVD audio
- Home theatre systems
- Set top boxes
- Digital TV

### BLOCK DIAGRAM

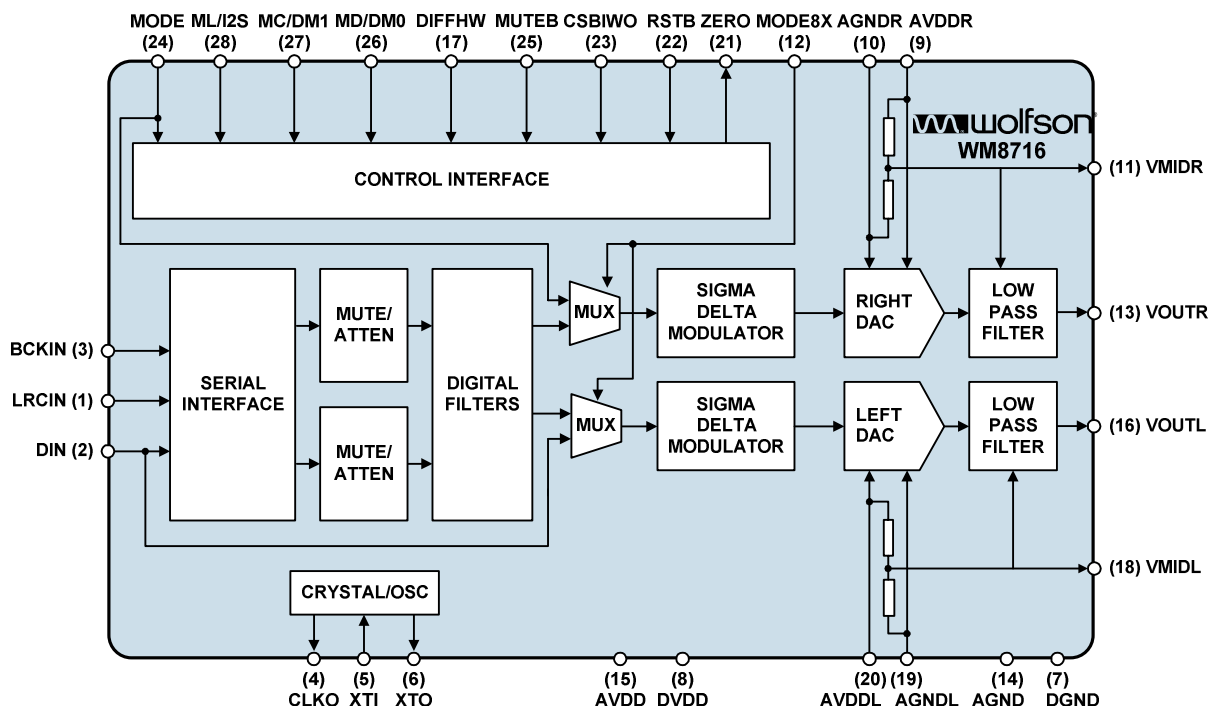

---

**TABLE OF CONTENTS**

|                                               |           |
|-----------------------------------------------|-----------|
| <b>DESCRIPTION .....</b>                      | <b>1</b>  |
| <b>FEATURES.....</b>                          | <b>1</b>  |
| <b>APPLICATIONS .....</b>                     | <b>1</b>  |
| <b>BLOCK DIAGRAM .....</b>                    | <b>1</b>  |
| <b>TABLE OF CONTENTS .....</b>                | <b>2</b>  |
| <b>PIN CONFIGURATION.....</b>                 | <b>3</b>  |
| <b>ORDERING INFORMATION .....</b>             | <b>3</b>  |
| <b>ABSOLUTE MAXIMUM RATINGS .....</b>         | <b>4</b>  |
| <b>RECOMMENDED OPERATING CONDITIONS .....</b> | <b>4</b>  |
| <b>ELECTRICAL CHARACTERISTICS .....</b>       | <b>5</b>  |
| TERMINOLOGY .....                             | 6         |
| <b>PIN DESCRIPTION .....</b>                  | <b>8</b>  |
| <b>DEVICE DESCRIPTION .....</b>               | <b>9</b>  |
| SYSTEM CLOCK .....                            | 9         |
| <b>AUDIO DATA INTERFACE .....</b>             | <b>10</b> |
| NORMAL SAMPLE RATE .....                      | 10        |
| 8 X FS INPUT SAMPLE RATE .....                | 11        |
| MODES OF OPERATION .....                      | 12        |
| HARDWARE CONTROL MODES .....                  | 12        |
| SOFTWARE CONTROL INTERFACE.....               | 13        |
| REGISTER MAP .....                            | 13        |
| MUTE MODES .....                              | 18        |
| FILTER RESPONSES .....                        | 19        |
| <b>APPLICATIONS INFORMATION .....</b>         | <b>22</b> |
| RECOMMENDED EXTERNAL COMPONENTS .....         | 22        |
| RECOMMENDED EXTERNAL COMPONENTS VALUES .....  | 22        |
| <b>PACKAGE DIMENSIONS .....</b>               | <b>25</b> |
| <b>IMPORTANT NOTICE .....</b>                 | <b>26</b> |
| ADDRESS: .....                                | 26        |

## PIN CONFIGURATION

|        |                          |     |    |                          |        |
|--------|--------------------------|-----|----|--------------------------|--------|
| LRCIN  | <input type="checkbox"/> | 1 ● | 28 | <input type="checkbox"/> | ML/I2S |
| DIN    | <input type="checkbox"/> | 2   | 27 | <input type="checkbox"/> | MC/DM1 |
| BCKIN  | <input type="checkbox"/> | 3   | 26 | <input type="checkbox"/> | MD/DM0 |
| CLKO   | <input type="checkbox"/> | 4   | 25 | <input type="checkbox"/> | MUTEB  |
| XTI    | <input type="checkbox"/> | 5   | 24 | <input type="checkbox"/> | MODE   |
| XTO    | <input type="checkbox"/> | 6   | 23 | <input type="checkbox"/> | CSBIWO |
| DGND   | <input type="checkbox"/> | 7   | 22 | <input type="checkbox"/> | RSTB   |
| DVDD   | <input type="checkbox"/> | 8   | 21 | <input type="checkbox"/> | ZERO   |
| AVDDR  | <input type="checkbox"/> | 9   | 20 | <input type="checkbox"/> | AVDDL  |
| AGNDR  | <input type="checkbox"/> | 10  | 19 | <input type="checkbox"/> | AGNDL  |
| VMIDR  | <input type="checkbox"/> | 11  | 18 | <input type="checkbox"/> | VMIDL  |
| MODE8X | <input type="checkbox"/> | 12  | 17 | <input type="checkbox"/> | DIFFHW |
| VOUTr  | <input type="checkbox"/> | 13  | 16 | <input type="checkbox"/> | VOUtl  |
| AGND   | <input type="checkbox"/> | 14  | 15 | <input type="checkbox"/> | AVDD   |

## ORDERING INFORMATION

| DEVICE        | TEMPERATURE RANGE | PACKAGE                                   | MOISTURE SENSITIVITY LEVEL | PEAK SOLDERING TEMPERATURE |
|---------------|-------------------|-------------------------------------------|----------------------------|----------------------------|
| WM8716SEDS/V  | -25 to +85°C      | 28-lead SSOP<br>(Pb- free)                | MSL2                       | 260°C                      |
| WM8716SEDS/RV | -25 to +85°C      | 28-lead SSOP<br>(Pb- free, tape and reel) | MSL2                       | 260°C                      |

**Note:**

Reel quantity = 2,000

## ABSOLUTE MAXIMUM RATINGS

Absolute Maximum Ratings are stress ratings only. Permanent damage to the device may be caused by continuously operating at or beyond these limits. Device functional operating limits and guaranteed performance specifications are given under Electrical Characteristics at the test conditions specified.



Wolfson tests its package types according to IPC/JEDEC J-STD-020B for Moisture Sensitivity to determine acceptable storage conditions prior to surface mount assembly. These levels are:

MSL1 = unlimited floor life at <30°C / 85% Relative Humidity. Not normally stored in moisture barrier bag.

MSL2 = out of bag storage for 1 year at <30°C / 60% Relative Humidity. Supplied in moisture barrier bag.

MSL3 = out of bag storage for 168 hours at <30°C / 60% Relative Humidity. Supplied in moisture barrier bag.

| CONDITION                                   | MIN        | MAX        |
|---------------------------------------------|------------|------------|
| Supply voltage                              | -0.3V      | +7.0V      |
| Reference input                             |            | VDD + 0.3V |
| Operating temperature range, T <sub>A</sub> | -25°C      | +85°C      |
| Storage temperature                         | -65°C      | +150°C     |
| Voltage range digital inputs                | DGND -0.3V | DVDD +0.3V |
| Master clock frequency                      |            | 37MHz      |

## RECOMMENDED OPERATING CONDITIONS

| PARAMETER               | SYMBOL      | TEST CONDITIONS | MIN  | TYP      | MAX  | UNIT |
|-------------------------|-------------|-----------------|------|----------|------|------|
| Digital supply range    | DVDD        |                 | -10% | 3.3 to 5 | +10% | V    |
| Analogue supply range   | AVDD        |                 | -10% | 3.3 to 5 | +10% | V    |
| Ground                  | AGND, DGND  |                 |      | 0        |      | V    |
| Difference DGND to AGND |             |                 | -0.3 | 0        | +0.3 | V    |
| Analogue supply current | AVDD = 5V   |                 |      | 26       | 40   | mA   |
| Digital supply current  | DVDD = 5V   |                 |      | 22       | 35   | mA   |
| Analogue supply current | AVDD = 3.3V |                 |      | 25       |      | mA   |
| Digital supply current  | DVDD = 3.3V |                 |      | 13       |      | mA   |

## ELECTRICAL CHARACTERISTICS

### TEST CONDITIONS

AVDD, DVDD = 5V, AGND, DGND = 0V,  $T_A$  = +25°C,  $f_s$  = 48kHz, SCKI = 256fs unless otherwise stated.

| PARAMETER                                      | SYMBOL   | TEST CONDITIONS | MIN         | TYP     | MAX          | UNIT |
|------------------------------------------------|----------|-----------------|-------------|---------|--------------|------|
| <b>DAC Circuit Specifications</b>              |          |                 |             |         |              |      |
| SNR (See Notes 1 and 2)                        |          |                 | 105         | 112     |              | dB   |
| THD (full-scale)<br>(See Note 2)               |          | 0dB FS          |             | -92     |              | dB   |
|                                                |          | -1dB FS         |             | -97     |              | dB   |
| Dynamic range<br>(See Note 2)                  |          | THD @ -60dB FS  | 105         | 112     |              | dB   |
| <b>Filter Characteristics (Sharp Roll-off)</b> |          |                 |             |         |              |      |
| Passband                                       |          | $\pm 0.0012$ dB | 0.4535fs    |         |              | dB   |
| Stopband                                       |          | -3dB            |             | 0.491fs |              |      |
| Passband ripple                                |          |                 |             |         | $\pm 0.0012$ | dB   |
| Stopband Attenuation                           |          | $f > 0.5465$ fs | -82         |         |              | dB   |
| Delay time                                     |          |                 |             | 30/fs   |              | s    |
| <b>Filter Characteristics (Slow Roll-off)</b>  |          |                 |             |         |              |      |
| Passband                                       |          | $\pm 0.001$ dB  | 0.274fs     |         |              |      |
| Stopband                                       |          | -3dB            | 0.459fs     |         |              |      |
| Passband ripple                                |          |                 |             |         | $\pm 0.001$  | dB   |
| Stopband Attenuation                           |          | $f > 0.732$ fs  | -82         |         |              | dB   |
| Delay time                                     |          |                 |             | 9/fs    |              | s    |
| <b>Internal Analogue Filter</b>                |          |                 |             |         |              |      |
| Bandwidth                                      |          | -3dB            |             | 195     |              | kHz  |
| Passband edge response                         |          | 20kHz           |             | -0.043  |              | dB   |
| <b>Digital Logic Levels</b>                    |          |                 |             |         |              |      |
| Input LOW level                                | $V_{IL}$ |                 |             |         | 0.8          |      |
| Input HIGH level<br>(See Note 3)               | $V_{IH}$ |                 | 2.0         |         |              | V    |
| Output LOW level                               | $V_{OL}$ | $I_{OL} = 2$ mA |             |         | DGND + 0.3V  | V    |
| Output HIGH level                              | $V_{OH}$ | $I_{OH} = 2$ mA | DVDD - 0.3V |         |              |      |


|                                     |  |                                                      |  |        |   |            |
|-------------------------------------|--|------------------------------------------------------|--|--------|---|------------|
| <b>Analogue Output Levels</b>       |  |                                                      |  |        |   |            |
| Output level                        |  | Into 10k $\Omega$ , full scale 0dB,<br>(5V supply)   |  | 1.1    |   | $V_{RMS}$  |
|                                     |  | Into 10k $\Omega$ , full scale 0dB,<br>(3.3V supply) |  | 0.72   |   | $V_{RMS}$  |
| Minimum resistance load             |  | To midrail or AC coupled<br>(5V supply)              |  | 1      |   | k $\Omega$ |
|                                     |  | To midrail or AC coupled<br>(3.3V supply)            |  | 600    |   | $\Omega$   |
| Maximum capacitance load            |  | 5V or 3.3V                                           |  | 100    |   | pF         |
| Output DC level                     |  |                                                      |  | AVDD/2 |   | V          |
| Gain mismatch channel to<br>channel |  |                                                      |  | 0.5    | 2 | %FSR       |
| <b>Reference Levels</b>             |  |                                                      |  |        |   |            |
| Potential divider resistance        |  | AVDD to VMIDL/VMIDR and<br>VMIDL/VMIDR to AGND       |  | 10     |   | k $\Omega$ |
| Voltage at VMIDL/VMIDR              |  |                                                      |  | AVSS/2 |   |            |
| <b>POR</b>                          |  |                                                      |  |        |   |            |
| POR threshold                       |  |                                                      |  | 2.5V   |   | V          |

**Notes:**

1. Ratio of output level with 1kHz full scale input, to the output level with all zeros into the digital input, measured 'A' weighted over a 20Hz to 20kHz bandwidth.
2. All performance measurements done with 20kHz low pass filter. Failure to use such a filter will result in higher THD+N and lower SNR and Dynamic Range readings than are found in the Electrical Characteristics. The low pass filter removes out of band noise; although it is not audible it may affect dynamic specification values.
3. Except for Pin 12 (MODE8X) and Pin 17 (DIFFHW), where  $V_{IH} = 2.6V$  min.

**TERMINOLOGY**

1. Signal-to-noise ratio (dB) (SNR) is a measure of the difference in level between the full-scale output and the output with no signal applied.
2. Dynamic range (dB) (DNR) is a measure of the difference between the highest and lowest portions of a signal. Normally a THD+N measurement at 60dB below full scale. The measured signal is then corrected by adding the 60dB to it. (eg THD+N @ -60dB = -32dB, DR = 92dB).
3. THD+N (dB) is a ratio of the r.m.s. values, of (Noise + Distortion)/Signal.
4. Stop band attenuation (dB) is the degree to which the frequency spectrum is attenuated (outside audio band).
5. Channel Separation (dB) (also known as Cross-Talk) is a measure of the amount one channel is isolated from the other. Normally measured by sending a full-scale signal down one channel and measuring the other.
6. Pass-Band Ripple - Any variation of the frequency response in the pass-band region.

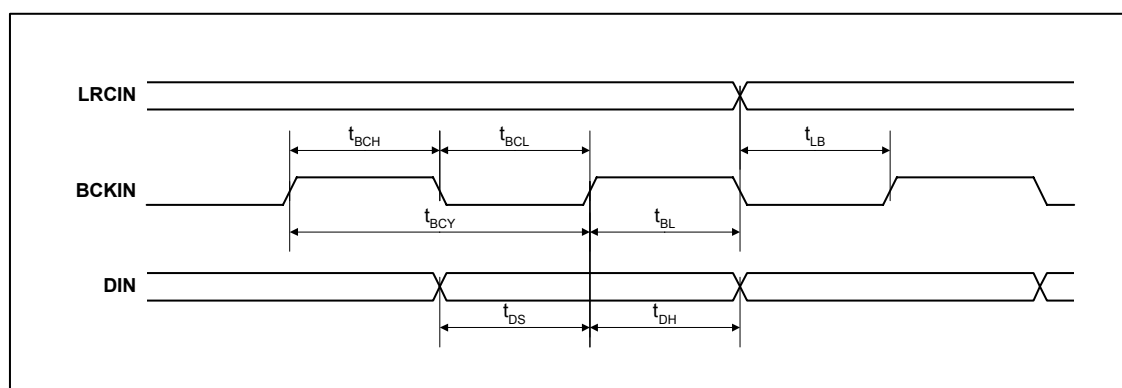**Figure 1 Audio Data Input Timing****TEST CONDITIONS**

AVDD, DVDD = 5V, AGND, DGND = 0V,  $T_A = +25^{\circ}C$ ,  $f_s = 48kHz$ , SCKI = 256fs unless otherwise stated.

| PARAMETER                                  | SYMBOL    | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------------------------|-----------|-----------------|-----|-----|-----|------|
| <b>Audio Data Input Timing Information</b> |           |                 |     |     |     |      |
| BCKIN pulse cycle time                     | $t_{BCY}$ |                 | 100 |     |     | ns   |
| BCKIN pulse width high                     | $t_{BCH}$ |                 | 50  |     |     | ns   |
| BCKIN pulse width low                      | $t_{BCL}$ |                 | 50  |     |     | ns   |
| BCKIN rising edge to LRCIN edge            | $t_{BL}$  |                 | 30  |     |     | ns   |
| LRCIN rising edge to BCKIN rising edge     | $t_{LB}$  |                 | 30  |     |     | ns   |
| DIN setup time                             | $t_{DS}$  |                 | 30  |     |     | ns   |
| DIN hold time                              | $t_{DH}$  |                 | 30  |     |     | ns   |

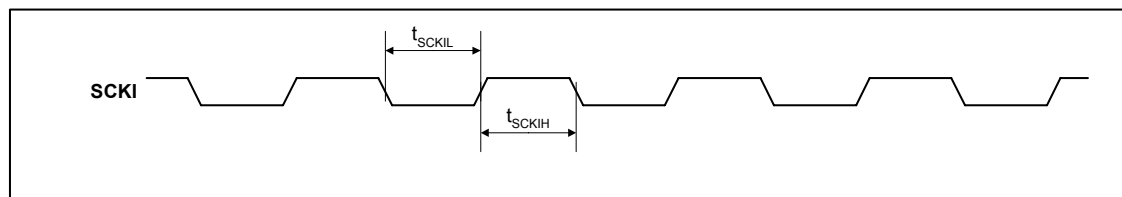


Figure 2 System Clock Timing Requirements

**TEST CONDITIONS**

AVDD, DVDD = 5V, AGND, DGND = 0V,  $T_A$  = +25°C,  $f_s$  = 48kHz, SCKI = 256fs unless otherwise stated.

| PARAMETER                              | SYMBOL      | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------------------|-------------|-----------------|-----|-----|-----|------|
| <b>System Clock Timing Information</b> |             |                 |     |     |     |      |
| SCKI System clock pulse width high     | $t_{SCKIH}$ |                 | 13  |     |     | ns   |
| SCKI System clock pulse width low      | $t_{SCKIL}$ |                 | 13  |     |     | ns   |

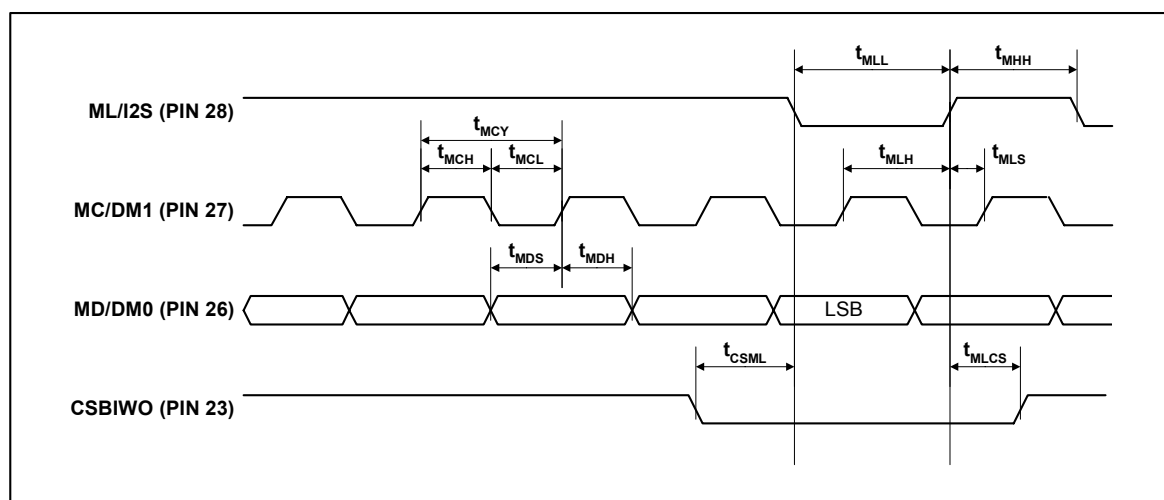


Figure 3 Program Register Input Timing

**TEST CONDITIONS**

AVDD, DVDD = 5V, AGND, DGND = 0V,  $T_A$  = +25°C,  $f_s$  = 48kHz, SCKI = 256fs unless otherwise stated.

| PARAMETER                                 | SYMBOL     | TEST CONDITIONS | MIN          | TYP | MAX | UNIT |
|-------------------------------------------|------------|-----------------|--------------|-----|-----|------|
| <b>Program Register Input Information</b> |            |                 |              |     |     |      |
| MC/DM1 Pulse cycle time                   | $t_{MCY}$  |                 | 100          |     |     | ns   |
| MC/DM1 Pulse width LOW                    | $t_{MCL}$  |                 | 40           |     |     | ns   |
| MC/DM1 Pulse width HIGH                   | $t_{MCH}$  |                 | 40           |     |     | ns   |
| MD/DM0 Hold time                          | $t_{MDH}$  |                 | 40           |     |     | ns   |
| MD/DM0 Set-up time                        | $t_{MDS}$  |                 | 40           |     |     | ns   |
| ML/I2S Low level time (See Note 3)        | $t_{MLL}$  |                 | 40 + 1SYSCLK |     |     | ns   |
| ML/I2S High level time (See Note 3)       | $t_{MHH}$  |                 | 40 + 1SYSCLK |     |     | ns   |
| ML/I2S Hold time                          | $t_{MLH}$  |                 | 40           |     |     | ns   |
| ML/I2S Set-up time                        | $t_{MLS}$  |                 | 40           |     |     | ns   |
| CSBIWO Low to ML/I2S low time             | $t_{CSML}$ |                 | 10           |     |     | ns   |
| ML/I2S High to CSBIWO high time           | $t_{MLCS}$ |                 | 10           |     |     | ns   |

**Note:**

3. System clock cycle.

## PIN DESCRIPTION

| PIN | NAME   | TYPE                                | DESCRIPTION                                                                                      |                                                                                                  |                                                                        |                                                                    |
|-----|--------|-------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------|
|     |        |                                     | Hardware Mode                                                                                    |                                                                                                  |                                                                        | Software Mode                                                      |
|     |        |                                     | Normal Mode                                                                                      | Differential Mode                                                                                | 8X Mode                                                                |                                                                    |
| 1   | LRCIN  | Digital input                       | Sample rate clock input.                                                                         |                                                                                                  |                                                                        |                                                                    |
| 2   | DIN    | Digital input                       | Audio data serial input                                                                          |                                                                                                  | DINL                                                                   | Audio data serial input                                            |
| 3   | BCKIN  | Digital input                       | Audio data bit clock input.                                                                      |                                                                                                  |                                                                        |                                                                    |
| 4   | CLKO   | Digital output                      | Oscillator buffered output (system clock).                                                       |                                                                                                  |                                                                        |                                                                    |
| 5   | XTI    | Analogue input                      | Oscillator input.                                                                                |                                                                                                  |                                                                        |                                                                    |
| 6   | XTO    | Analogue output                     | Oscillator output.                                                                               |                                                                                                  |                                                                        |                                                                    |
| 7   | DGND   | Supply                              | Digital ground supply.                                                                           |                                                                                                  |                                                                        |                                                                    |
| 8   | DVDD   | Supply                              | Digital positive supply.                                                                         |                                                                                                  |                                                                        |                                                                    |
| 9   | AVDDR  | Supply                              | Analogue positive supply.                                                                        |                                                                                                  |                                                                        |                                                                    |
| 10  | AGNDR  | Supply                              | Analogue ground supply.                                                                          |                                                                                                  |                                                                        |                                                                    |
| 11  | VMIDR  | Analogue output                     | Mid rail right channel.                                                                          |                                                                                                  |                                                                        |                                                                    |
| 12  | MODE8X | Digital input                       | Internal pull-down, active high, 8 x fs mode.                                                    |                                                                                                  |                                                                        |                                                                    |
| 13  | VOUTR  | Analogue output                     | Right channel DAC output.                                                                        |                                                                                                  |                                                                        |                                                                    |
| 14  | AGND   | Supply                              | Analogue ground supply.                                                                          |                                                                                                  |                                                                        |                                                                    |
| 15  | AVDD   | Supply                              | Analogue positive supply.                                                                        |                                                                                                  |                                                                        |                                                                    |
| 16  | VOUTL  | Analogue output                     | Left channel DAC output.                                                                         |                                                                                                  |                                                                        |                                                                    |
| 17  | DIFFHW | Digital input                       | Internal pull-down, active high, differential mono mode                                          |                                                                                                  |                                                                        |                                                                    |
| 18  | VMIDL  | Analogue output                     | Mid rail left channel.                                                                           |                                                                                                  |                                                                        |                                                                    |
| 19  | AGNDL  | Supply                              | Analogue ground supply.                                                                          |                                                                                                  |                                                                        |                                                                    |
| 20  | AVDDL  | Supply                              | Analogue positive supply.                                                                        |                                                                                                  |                                                                        |                                                                    |
| 21  | ZERO   | Digital output                      | Infinite zero detect – active low. Open drain type output with active pull-down.                 |                                                                                                  |                                                                        |                                                                    |
| 22  | RSTB   | Digital input                       | Reset input – active low. Internal pull-up.                                                      |                                                                                                  |                                                                        |                                                                    |
| 23  | CSBIWO | Digital input<br>Internal pull-down | Wordlength:<br>Low for 16-bit data.<br>High for 20-bit (normal) or 24-bit I <sup>2</sup> S data. | Wordlength:<br>Low for 16-bit data.<br>High for 20-bit (normal) or 24-bit I <sup>2</sup> S data. | Wordlength:<br>Low for 20-bit data.<br>High for 24-bit data.           | Low for serial interface operation.                                |
| 24  | MODE   | Digital input<br>Internal pull-up   | Low for hardware mode.                                                                           | Low for left mono mode. High for right mono mode                                                 | DINR                                                                   | High for software mode.                                            |
| 25  | MUTEB  | Digital input<br>Internal pull-up   | Low to soft mute.<br>High for normal operation.<br>Z for automute.                               | Low to soft mute.<br>High for normal operation.<br>Z for automute.                               | Low to soft mute.<br>High for normal operation.<br>Z for automute.     | Low to soft mute.<br>High for normal operation.<br>Z for automute. |
| 26  | MD/DM0 | Digital input<br>Internal pull-up   | De-emphasis mode select bit 0.                                                                   | Low for no de-emphasis.<br>High for 44.1kHz de-emphasis.                                         | LRP – LRCLK polarity select.                                           | Control serial interface data signal.                              |
| 27  | MC/DM1 | Digital input<br>Internal pull-up   | De-emphasis mode select bit 1.                                                                   | Low for normal filter operation.<br>High for filter slow roll-off.                               | Unused.<br>Leave unconnected.                                          | Control serial interface clock signal.                             |
| 28  | ML/I2S | Digital input<br>Internal pull-up   | Audio serial format:<br>Low – right justified.<br>High – I <sup>2</sup> S.                       | Audio serial format:<br>Low – right justified.<br>High – I <sup>2</sup> S.                       | Input data format:<br>Low – right justified.<br>High – left justified. | Control serial interface load signal.                              |

**Note:** Digital input pins have Schmitt trigger input buffers except Pin 12 and Pin 17.

## DEVICE DESCRIPTION

The WM8716 is a high performance 128fs oversampling rate stereo DAC employing a novel 64 level sigma delta DAC design which provides optimised signal-to-noise performance and clock jitter tolerance. It is ideally suited to high quality audio applications such as CD, DVD-audio, home theatre receivers and professional mixing consoles. The WM8716 supports sample rates from 8ks/s to 192ks/s.

The control functions of the WM8716 are either pin selected (hardware mode) or programmed via the serial interface (software mode). Control functions that are available include: data input word length and format selection (16-24 bits: I<sup>2</sup>S, left justified or right justified); de-emphasis sample rate selection (48kHz, 44.1kHz and 32kHz); differential output modes; a software or hardware mute and independently digitally controllable attenuation on both channels.

The digital filtering may be bypassed entirely by selecting MODE8X. Data is then input directly to the DAC, bypassing the digital filters. Left and right channels are input separately, using the MODE pin as the right channel input. This mode allows the use of alternative digital filters, such as the Pacific Microsonics PMD100 HDCC filter.

In addition to the normal stereo operating mode the WM8716 may also be used in dual differential mode with either the left or right channel (selectable) being output differentially. Two WM8716s can then be used in parallel to implement a stereo channel, each supporting a single channel differentially. This mode is available in both software and hardware modes and may also be used in conjunction with MODE8X.

## SYSTEM CLOCK

Sample rates from 8ks/s up to 96ks/s are available, and automatically selected, with a system clock of 256fs, 384fs, 512fs or 768fs. In addition a system clock of 128fs or 192fs may be used, with sample rates up to 192ks/s. With a 128fs or 192fs system clock 64x oversampling mode operation is automatically selected and the first stage of the digital filter is bypassed.

WM8716 has an asynchronous monitor circuit, which in the event of removal of the master system clock, resets the digital filters and analogue circuits, muting the output. Re-application of the system clock re-starts the filters from an initialised state. Control registers are not reset under this condition.

The WM8716 is tolerant of asynchronous bit clock jitter. The internal signal processing resynchronises to the external LRCIN once the phase difference between bit clock and the system clock exceeds half an LRCIN period. During this re-synch period the interpolating filters will either miss or repeat an audio sample, minimising the audible effects of the operation. Table 1 shows the typical system clock frequency inputs for the WM8716.

| SAMPLING RATE<br>(LRCIN) | SYSTEM CLOCK FREQUENCY (MHZ) |        |             |             |             |             |
|--------------------------|------------------------------|--------|-------------|-------------|-------------|-------------|
|                          | 128fs                        | 192fs  | 256fs       | 384fs       | 512fs       | 768fs       |
| 32kHz                    | 4.096                        | 6.144  | 8.192       | 12.288      | 16.384      | 24.576      |
| 44.1kHz                  | 5.6448                       | 8.467  | 11.2896     | 16.9340     | 22.5792     | 33.8688     |
| 48kHz                    | 6.114                        | 9.216  | 12.288      | 18.432      | 24.576      | 36.864      |
| 96kHz                    | 12.288                       | 18.432 | 24.576      | 36.864      | Unavailable | Unavailable |
| 192kHz                   | 24.576                       | 36.864 | Unavailable | Unavailable | Unavailable | Unavailable |

**Table 1 System Clock Frequencies Versus Sampling Rate**

## AUDIO DATA INTERFACE

Data may be input at a rate corresponding to the system clock having a rate of 256fs or 384fs or 512fs or 768fs, in which case an oversampling ratio of 128x is selected. Alternatively a rate of 128fs or 192fs may be used, in which case the first filter stage is bypassed and an oversampling ratio of 64x results. Finally, in MODE8X, data may be input at 8x the normal rate, in which case separate input pins are used to input the two stereo channels of data (unless DIFFHW mode and MODE8X are both selected, in which case only a mono channel is converted differentially). In MODE8X all filter stages are by-passed, prior to the sigma delta modulator. Data is input MSB first in all modes.

### NORMAL SAMPLE RATE

In normal mode, the data is input serially on one pin for both left and right channels.

Data can be "right justified" meaning that the last 16, 20 or 24 bits (depending on chosen PCM word length) that were clocked in prior to the transition on LRCIN are valid.

Alternatively data can be "left justified" (20 and 24-bit PCM data only), where the bits are clocked in as the first 20 or 24 bits after a transition on LRCIN.

For the three I<sup>2</sup>S modes supported (16-bit, 20-bit and 24-bit PCM data), data is clocked "left justified" except with one additional preceding clock cycle.

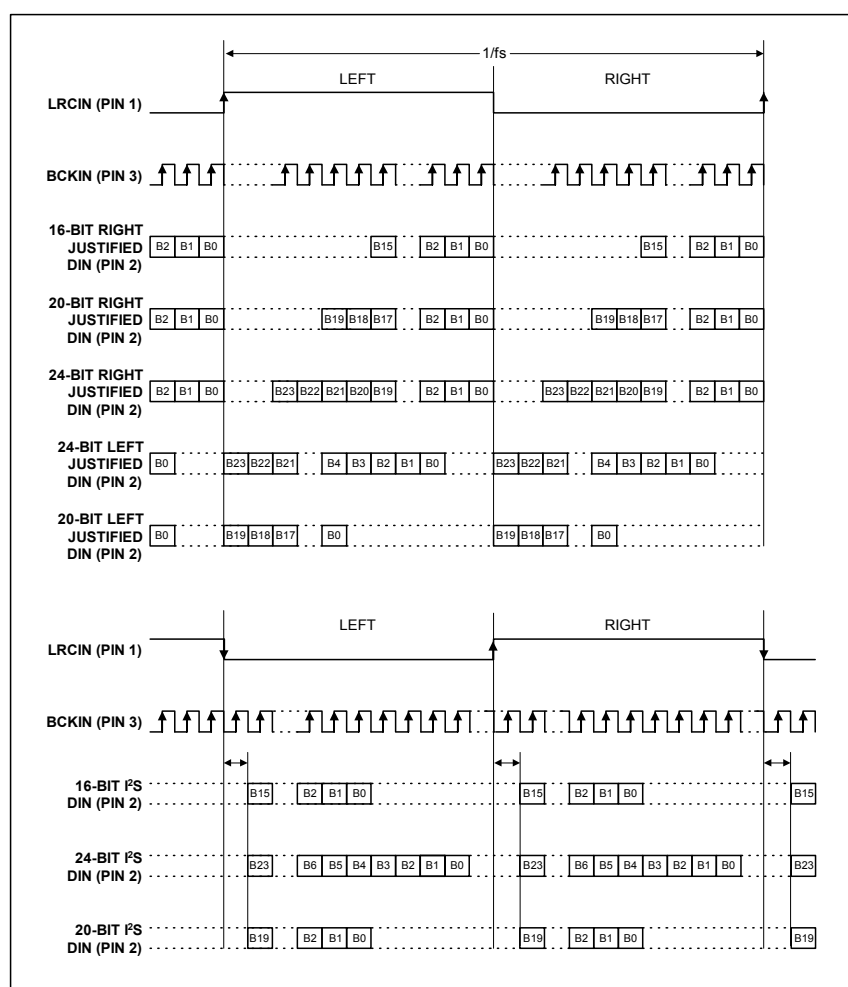


Figure 4 Audio Data Input Format

## 8 X FS INPUT SAMPLE RATE

Due to the higher speed of the interface in 8 x fs mode, audio data is input on two pins. The MODE pin (pin 24) is used as the second input for the right channel data and left data is input on DIN (pin 2). In this mode, software control of the device is not available. The data can be input in two formats, left or right justified, selectable by ML/I2S and two word lengths (20 or 24 bit), selectable by CSBIWO. In both modes the data is always clocked in MSB first.

For left justified data the word start is marked by the falling edge of LRCIN. The data is clocked in on the next 20/24 BCKIN rising edges. This format is compatible with devices such as the PMD100.

For right justified the data is justified to the rising edge of LRCIN and the data is clocked in on the preceding 20/24 BCKIN rising edges before the LRCIN rising edge. This format is compatible with devices such as the DF1704 or SM5842.

In both modes the polarity of LRCIN can be switched using MD/DM0.

Differential hardware mode can be used in conjunction with 8fs mode by setting the DIFFHW pin high. In differential 8fs mode the data is input on DIN and output differentially. MODE is unused and must be tied low.

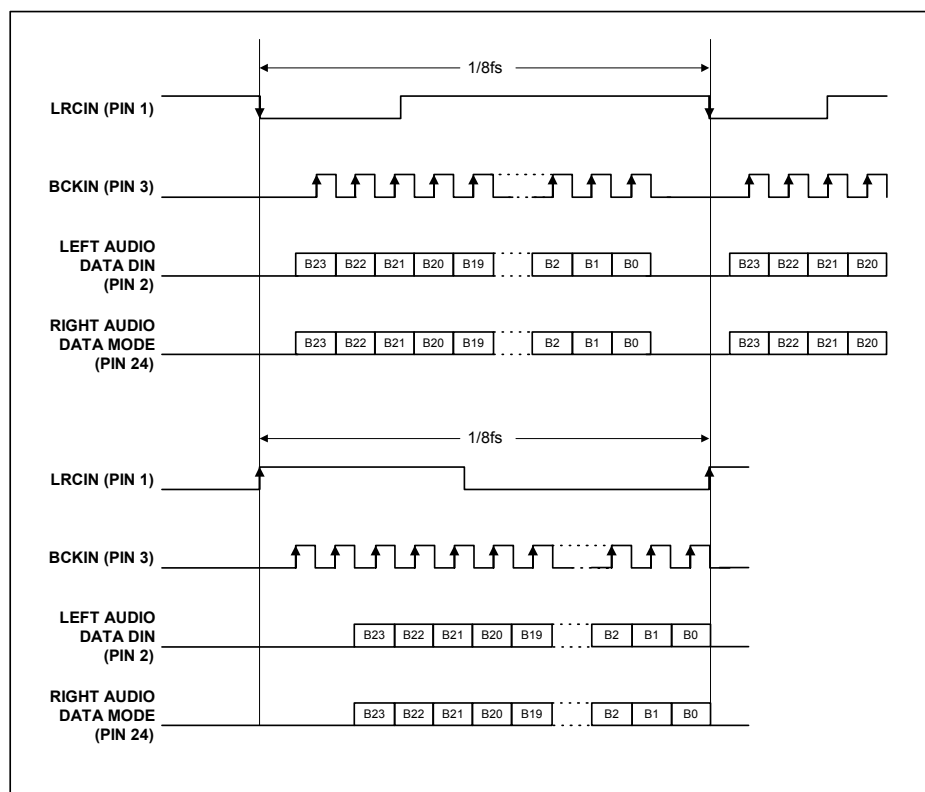


Figure 5 Audio Data Input Format (8 x fs Operation)

## MODES OF OPERATION

Control of the various modes of operation is either by software control over the serial interface, or by hard-wired pin control. Selection of software or hardware mode is via MODE pin. The following functions may be controlled either via the serial control interface or by hard wiring of the appropriate pins.

## HARDWARE CONTROL MODES

When the MODE pin is held 'low' the following hardware modes of operation are available. In Hardware differential mode or 8X mode some of these modes/control words are altered or unavailable.

### DE-EMPHASIS CONTROL

| MDDM1<br>PIN 27 | MCDMO<br>PIN 26 | DE-EMPHASIS |
|-----------------|-----------------|-------------|
| L               | L               | Off         |
| L               | H               | 48kHz       |
| H               | L               | 44.1kHz     |
| H               | H               | 32kHz       |

Table 2 De-Emphasis Control

### AUDIO INPUT FORMAT

| CSBIIS<br>PIN 28 | CSBIWO<br>PIN 23 | DATA FORMAT                   |
|------------------|------------------|-------------------------------|
| L                | L                | 16 bit normal right justified |
| L                | H                | 20 bit normal right justified |
| H                | L                | 16 bit I <sup>2</sup> S       |
| H                | H                | 24 bit I <sup>2</sup> S       |

Table 3 Audio Input Format

### SOFT MUTE

| MUTEB<br>PIN 25 | FUNCTION                    |
|-----------------|-----------------------------|
| L               | Mute On (no output)         |
| Z               | Automute                    |
| H               | Mute Off (normal operation) |

Table 4 Soft Mute

A logic low on the MUTEB pin will cause the attenuation to ramp to infinite attenuation at a rate of 128/fs seconds per 0.5dB step. Setting MUTEB high will cause the attenuation to ramp back to its previous value.

Leaving MUTEB undriven allows operation of the automute circuit in both hardware and software modes. On receiving 1024 consecutive zero value audio samples, the analogue stage output mute is asserted. This may be overdriven from the MUTEB pin to disable the automute function, or output as a weak (10kohm) output signal.

## SOFTWARE CONTROL INTERFACE

The WM8716 can be controlled using a 3-wire serial interface. MD/DM0 (pin 26) is used for the program data, MC/DM1 (pin 22) is used to clock in the program data and ML/I2S (pin 28) is used to latch in the program data. The 3-wire interface protocol is shown in Figure 6. CSB/IWO (pin 23) must be low when writing.

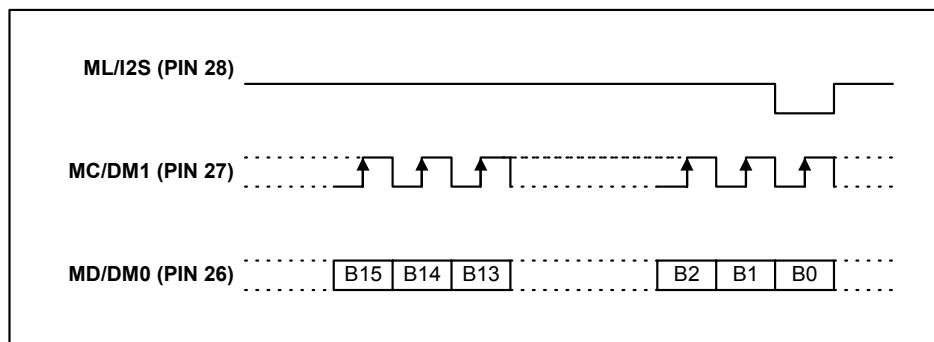


Figure 6 Three-Wire Serial Interface

## REGISTER MAP

WM8716 controls the special functions using 4 program registers, which are 16-bits long. These registers are all loaded through input pin MD/DM0. After the 16 data bits are clocked in, ML/I2S is used to latch in the data to the appropriate register. Table 5 shows the complete mapping of the 4 registers. Note that in hardware differential mode and 8X modes, software control is not available. The hardware differential mode (Diff[1:0]) clock loss detector disable (CDD) can only be accessed by writing to M2[8:5] with the pattern 1111. Register M4 is then accessible by setting A[2:0] to 110.

|    | B15 | B14 | B13 | B12 | B11   | B10   | B9    | B8  | B7  | B6  | B5    | B4    | B3  | B2  | B1  | B0               |
|----|-----|-----|-----|-----|-------|-------|-------|-----|-----|-----|-------|-------|-----|-----|-----|------------------|
| M0 | -   | -   | -   | -   | A2(0) | A1(0) | A0(0) | LDL | AL7 | AL6 | AL5   | AL4   | AL3 | AL2 | AL1 | AL0              |
| M1 | -   | -   | -   | -   | A2(0) | A1(0) | A0(1) | LDR | AR7 | AR6 | AR5   | AR4   | AR3 | AR2 | AR1 | AR0              |
| M2 | -   | -   | -   | -   | A2(0) | A1(1) | A0(0) | -   | -   | -   | -     | IW1   | IW0 | OPE | DEM | MUT              |
| M3 | -   | -   | -   | -   | A2(0) | A1(1) | A0(1) | IZD | SF1 | SF0 | CK0   | REV   | SR0 | ATC | LRP | I <sup>2</sup> S |
| M4 | -   | -   | -   | -   | A2(1) | A1(1) | A0(0) | -   | -   | CDD | DIFF1 | DIFF0 | -   | -   | -   | -                |

Table 5 Mapping of Program Registers

| REGISTER | BITS  | NAME    | DEFAULT | DESCRIPTION                                      |
|----------|-------|---------|---------|--------------------------------------------------|
| 0        | [7:0] | AL[7:0] | FF      | Attenuation data for left channel.               |
|          | 8     | LDL     | 0       | Attenuation data load control for left channel.  |
| 1        | [7:0] | AR[7:0] | FF      | Attenuation data for right channel.              |
|          | 8     | LDR     | 0       | Attenuation data load control for right channel. |
| 2        | 0     | MUT     | 0       | Left and right DACs soft mute control.           |
|          | 1     | DEM     | 0       | De-emphasis control.                             |
|          | 2     | OPE     | 0       | Left and right DACs operation control.           |
|          | [4:3] | IW[1:0] | 0       | Input audio data bit select.                     |
| 3        | 0     | I2S     | 0       | Audio data format select.                        |
|          | 1     | LRP     | 0       | Polarity of LRCIN select.                        |
|          | 2     | ATC     | 0       | Attenuator control.                              |
|          | 3     | SR0     | 0       | Digital filter slow roll-off select.             |
|          | 4     | REV     | 0       | Output phase reverse.                            |
|          | 5     | CKO     | 0       | CLKO frequency select.                           |
|          | [7:6] | SF[1:0] | 0       | Sampling rate select.                            |
|          | 8     | IZD     | 0       | Infinite zero detection circuit control.         |
| 4        | [5:4] | DIFF    | 0       | Differential output mode.                        |
|          | 6     | CDD     | 0       | Clock loss detector disable.                     |

Table 6 Register Bit Descriptions

### DAC OUTPUT ATTENUATION

The level of attenuation for eight bit code X, is given by:

$$0.5 * (X - 255) \text{ dB}, \quad 1 \leq X \leq 255$$

$$-\infty \text{ dB (mute)}, \quad X = 0$$

Bit 8 in register 0 (LDL) is used to control the loading of attenuation data in B[7:0]. When LDL is set to 0, attenuation data will be loaded into AL[7:0], but it will not affect the filter attenuation. LDR in register 1 has the same function for right channel attenuation. Only when LDL or LDR is set to '1' will the filter attenuation be updated. This permits left and right channel attenuation to be updated simultaneously.

Attenuation level is controlled by AL[7:0] (left channel) or AR[7:0] (right channel). Attenuation levels are given in Table 4.

| X[7:0]  | ATTENUATION LEVEL |
|---------|-------------------|
| 00(hex) | -∞dB (mute)       |
| 01(hex) | -127.0dB          |
| :       | :                 |
| :       | :                 |
| FD(hex) | -1.0dB            |
| FE(hex) | -0.5dB            |
| FF(hex) | 0.0dB             |

Table 7 Attenuation Control Level

Bit 2 in Reg3 is used to control the attenuator (ATC). When ATC is "high", the attenuation data loaded in program register 0 is used for both the left and the right channels. When ATC is low, the attenuation data for each register is applied separately to left and right channels.

**SOFT MUTE**

| MUT<br>(REG2, B0) |                                  |
|-------------------|----------------------------------|
| L                 | Soft Mute off (normal operation) |
| H                 | Soft Mute on (no output)         |

**Table 8 Soft Mute**

Setting MUT causes the attenuation to ramp from the current value down to 00. The values held in the attenuation registers are unchanged. When MUT is reset the attenuation will ramp back up to the previous value. The ramp rate is 128/fs s/0.5dB step.

**DIGITAL DE-EMPHASIS**

| DEM<br>(REG2, B1) |                 |
|-------------------|-----------------|
| L                 | De-emphasis off |
| H                 | De-emphasis on  |

**Table 9 Digital De-Emphasis****DAC OPERATION ENABLE**

| OPE<br>(REG2, B2) |                                                                |
|-------------------|----------------------------------------------------------------|
| L                 | Normal operation                                               |
| H                 | DAC output forced to bipolar zero, irrespective of input data. |

**Table 10 DAC Operation Enable****AUDIO DATA INPUT FORMAT**

| I2S<br>(REG3, B0) | IW1<br>(REG2, B4) | IW0<br>(REG2, B3) | AUDIO INTERFACE                   |
|-------------------|-------------------|-------------------|-----------------------------------|
| 0                 | 0                 | 0                 | 16-bit standard right justified   |
| 0                 | 0                 | 1                 | 20-bit standard right justified   |
| 0                 | 1                 | 0                 | 24-bit standard right justified   |
| 0                 | 1                 | 1                 | 24-bit left justified (MSB first) |
| 1                 | 0                 | 0                 | 16-bit I <sup>2</sup> S           |
| 1                 | 0                 | 1                 | 24-bit I <sup>2</sup> S           |
| 1                 | 1                 | 0                 | 20-bit I <sup>2</sup> S           |
| 1                 | 1                 | 1                 | 20-bit left justified (MSB first) |

**Table 11 Audio Data Input Format****POLARITY OF LR INPUT CLOCK**

The left channel data for a particular sample instant is always input first, then the right channel data.

| LRP<br>(REG3, B1) |                                                  |
|-------------------|--------------------------------------------------|
| L                 | LR High – left channel<br>LR Low – right channel |
| H                 | LR Low – left channel<br>LR High – right channel |

**Table 12 Polarity of LR Input Clock**

**INDIVIDUAL OR COMMON ATTENUATION CONTROL**

| ATC<br>(REG3, B2) |                          |
|-------------------|--------------------------|
| L                 | Individual control       |
| H                 | Common control from Reg0 |

Table 13 Individual or Common Attenuation Control

**DIGITAL FILTER ROLL-OFF SELECTION**

| SRO<br>(REG3, B3) |       |
|-------------------|-------|
| L                 | Sharp |
| H                 | Slow  |

Table 14 Digital Filter Roll-Off Selection

**ANALOGUE OUTPUT POLARITY REVERSAL**

| REV<br>(REG3, B4) |          |
|-------------------|----------|
| L                 | Normal   |
| H                 | Inverted |

Table 15 Analogue Output Polarity Reversal

**CLKO OUTPUT FREQUENCY**

| CKO<br>(REG3, B5) |       |
|-------------------|-------|
| L                 | XTI   |
| H                 | XTI/2 |

Table 16 CLKO Output Frequency

**DE-EMPHASIS SAMPLE RATE**

| SF1<br>(REG3, B7) | SF0<br>(REG3, B6) | SAMPLE RATE    |
|-------------------|-------------------|----------------|
| 0                 | 0                 | No de-emphasis |
| 0                 | 1                 | 48kHz          |
| 1                 | 0                 | 44.1kHz        |
| 1                 | 1                 | 32kHz          |

Table 17 De-Emphasis Sample Rate

**INFINITE ZERO DETECT**

| IZD<br>(REG3, B8) |                      |
|-------------------|----------------------|
| L                 | Zero detect mute off |
| H                 | Zero detect mute on  |

Table 18 Infinite Zero Detect

**DIFFERENTIAL MONO MODE**

Using bits 4 and 5, the differential output mode may be selected to be one of normal stereo, reversed stereo, mono left or mono right, as shown in Table 19.

| DIFF[1:0]<br>B[4:5]) | DIFFERENTIAL OUTPUT MODE                                                                                                      |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------|
| 00                   | Stereo                                                                                                                        |
| 01                   | Stereo reverse.                                                                                                               |
| 10                   | Mono left – differential outputs.<br>VOU <sub>TL</sub> is left channel.<br>VOU <sub>TR</sub> is the negative of left channel. |
| 11                   | Mono right – differential outputs.<br>VOU <sub>TL</sub> is the negative right channel.<br>VOU <sub>TR</sub> is right channel. |

**Table 19 Differential Output Modes**

Using these controls a pair of WM8716 devices may be used to build a 'dual differential' stereo implementation with higher performance and differential output.

**CLOCK LOSS DETECTOR DISABLE**

| CDD (REG4, B6) |                         |
|----------------|-------------------------|
| L              | Clock loss detector on  |
| R              | Clock loss detector off |

**Table 20 Clock Loss Detector Disable**

When the system clock is inactive for approximately 100µs, the clock loss detector circuit detects the loss of clock and the analogue circuitry is forced into a mute condition and the digital filters reset. Setting the CDD bit disables this behaviour.


## MUTE MODES

The device has various mute modes.

|                                           | DIGITAL FILTER                                                                                      | ANALOGUE |                                                   |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------|----------|---------------------------------------------------|
|                                           |                                                                                                     | ANRES    | ANMUTE                                            |
| Reg bit OPE = '1'                         | Unaffected                                                                                          |          | Asserted                                          |
| MUTEB pin                                 | Gain ramped to zero<br>On release volume ramps to previous value                                    |          | Asserted when gain = 0                            |
| AUTOMUTE (detect 1024 zero input samples) | Automute has no effect on digital filters                                                           |          | Asserted after 1024 zero input samples if IZD = 1 |
| Reg bit MUT                               | As MUTEB pin                                                                                        |          | As MUTEB pin                                      |
| Gain = 00 (left & right)                  | Gain = $-\infty$ dB                                                                                 |          | Asserted                                          |
| RAM initialise                            | Gain initialised to 0dB                                                                             |          | Asserted                                          |
| Loss of system clock                      | Not running (no clock). On clock restart, filters initialised, RAM initialised. Registers unchanged | Asserted | Asserted                                          |
| No LRCLK or invalid SCLK/LRCLK ratio      | Filters initialised, RAM initialised. Registers unchanged                                           | Asserted | Asserted                                          |
| RB                                        | Reset – gain initialised to 0dB                                                                     | Asserted | Asserted                                          |
| Power-on reset                            | Reset                                                                                               | Asserted | Asserted                                          |

**Table 21 Mute Modes**

- ANRES is the reset to the switched capacitor filter.
- ANMUTE is an analogue muting signal gating the analogue signal at the output (after the SC filter)
- AUTOMUTE is asserted when both the IZD register bit is asserted and the input audio data has been zero on both left and right channels for 1024 input samples. The first non-zero sample de-asserts.
- Applying a logic low to MUTEB or setting MUT in Reg2 causes the gain registers to ramp to zero. When a logic high is applied, the gain ramps slowly back up to the value held in the appropriate attenuation register (AL or AR). The ramp rate = 128/fs s/0.5dB step.

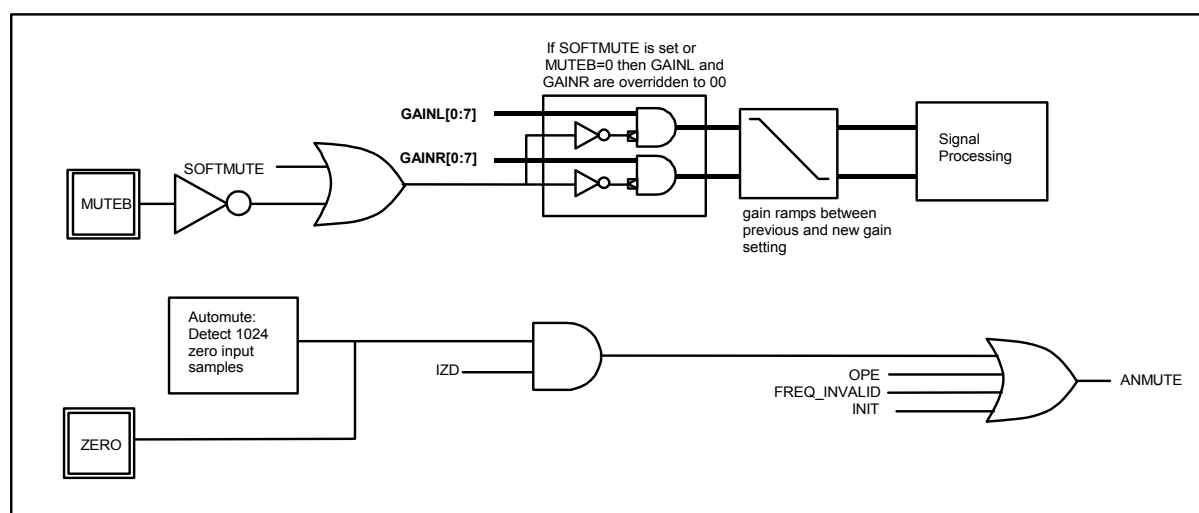

**Figure 7 Mute Modes**

## FILTER RESPONSES

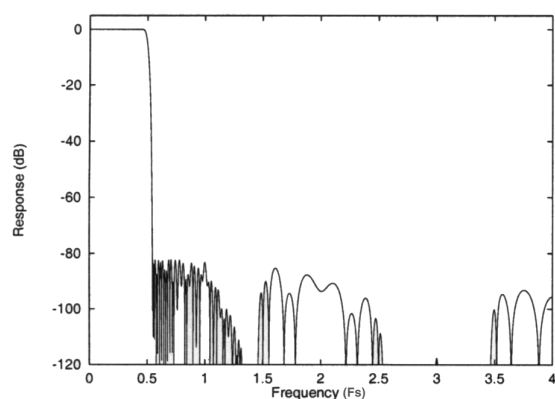


Figure 8 Digital Filter Response (Sharp Roll-off Mode)

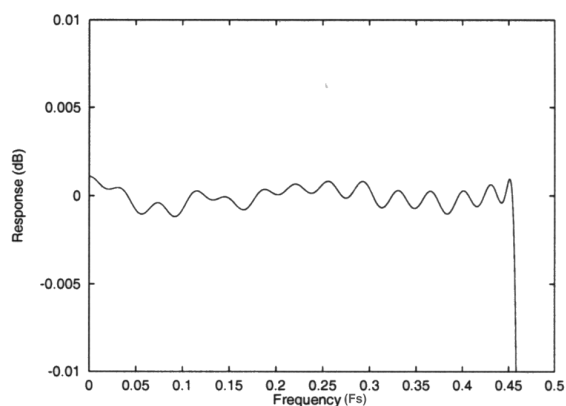


Figure 9 Digital Filter Response (Sharp Roll-off Mode)

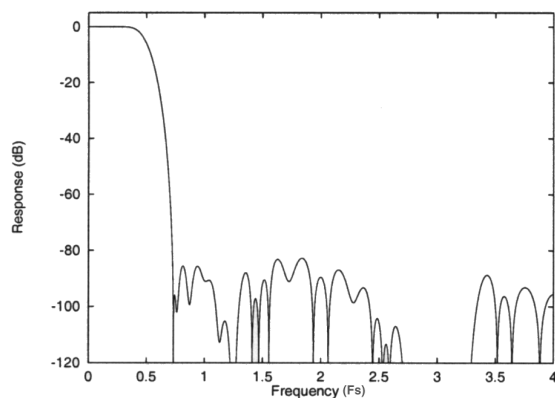


Figure 10 Digital Filter Response (Slow Roll-off Mode)

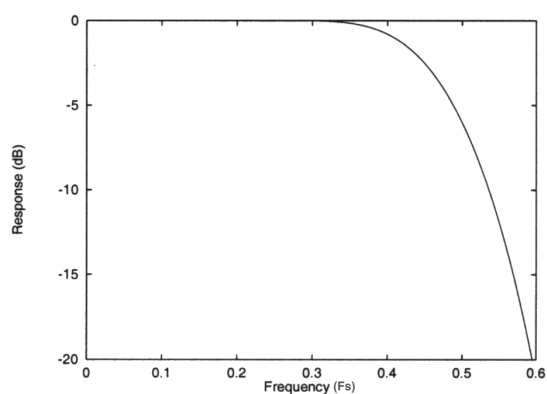


Figure 11 Digital Filter Response (Slow Roll-off Mode)



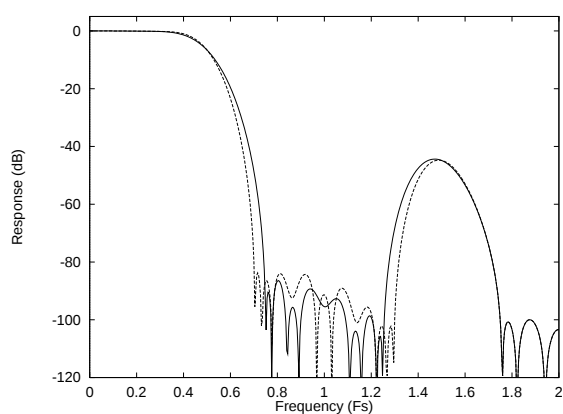



Figure 12 Digital Filter Response 128fs Mode (192kHz Sample Rate) Normal Mode – Solid, Slow Mode – Dashed

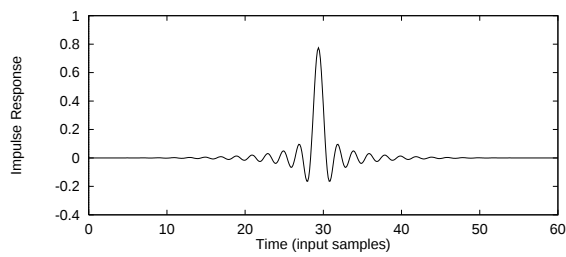


**Figure 13 Impulse Response (Normal Roll-off, no De-emphasis)**

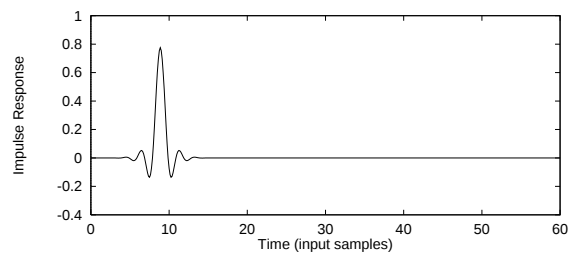


**Figure 14 Impulse Response (Slow Roll-off, no De-emphasis)**

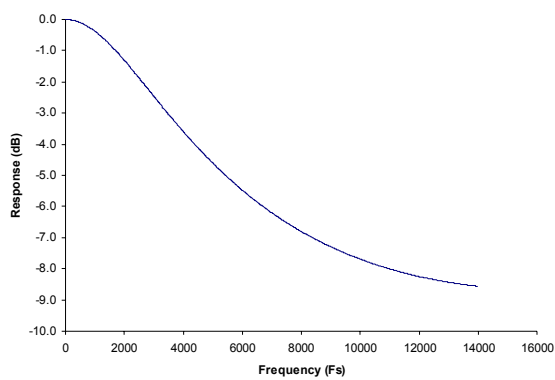


**Figure 15 De-emphasis frequency response (fs=32kHz)**

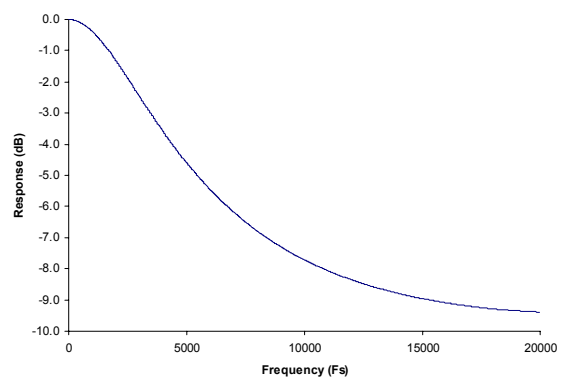


**Figure 15 De-emphasis frequency response (fs=44.1kHz)**

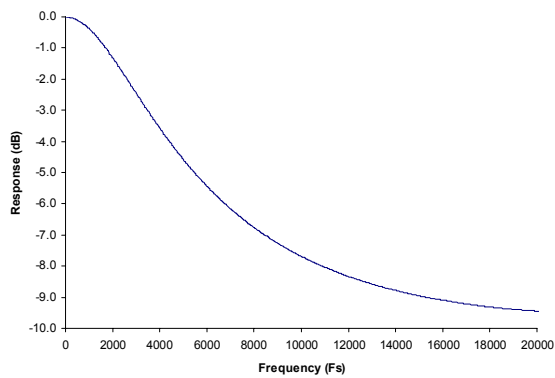


**Figure 16 De-emphasis frequency response (fs=48kHz)**

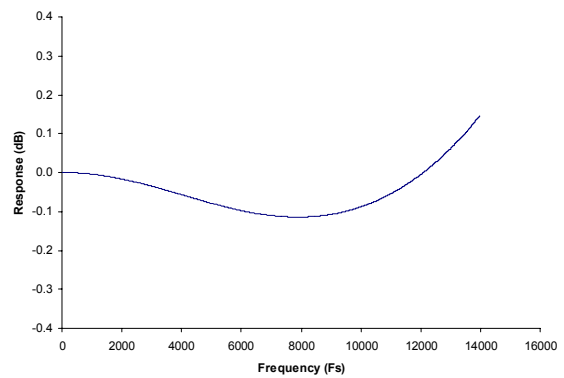

**Figure 17 De-emphasis frequency response error (fs=32kHz)**

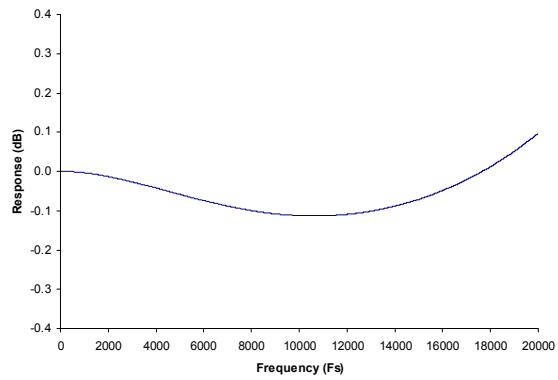

**Figure 18 De-emphasis frequency response error  
(fs=44.1kHz)**

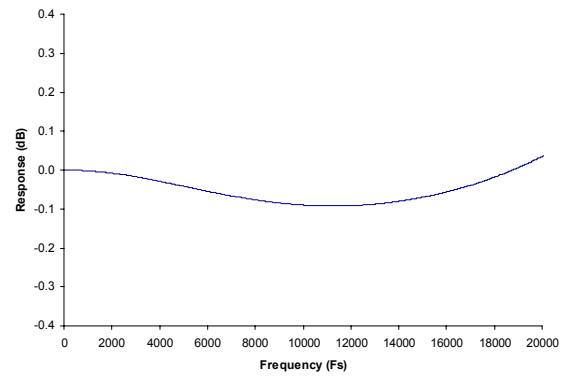

**Figure 19 De-emphasis frequency response error  
(fs=48kHz)**

## APPLICATIONS INFORMATION

## RECOMMENDED EXTERNAL COMPONENTS

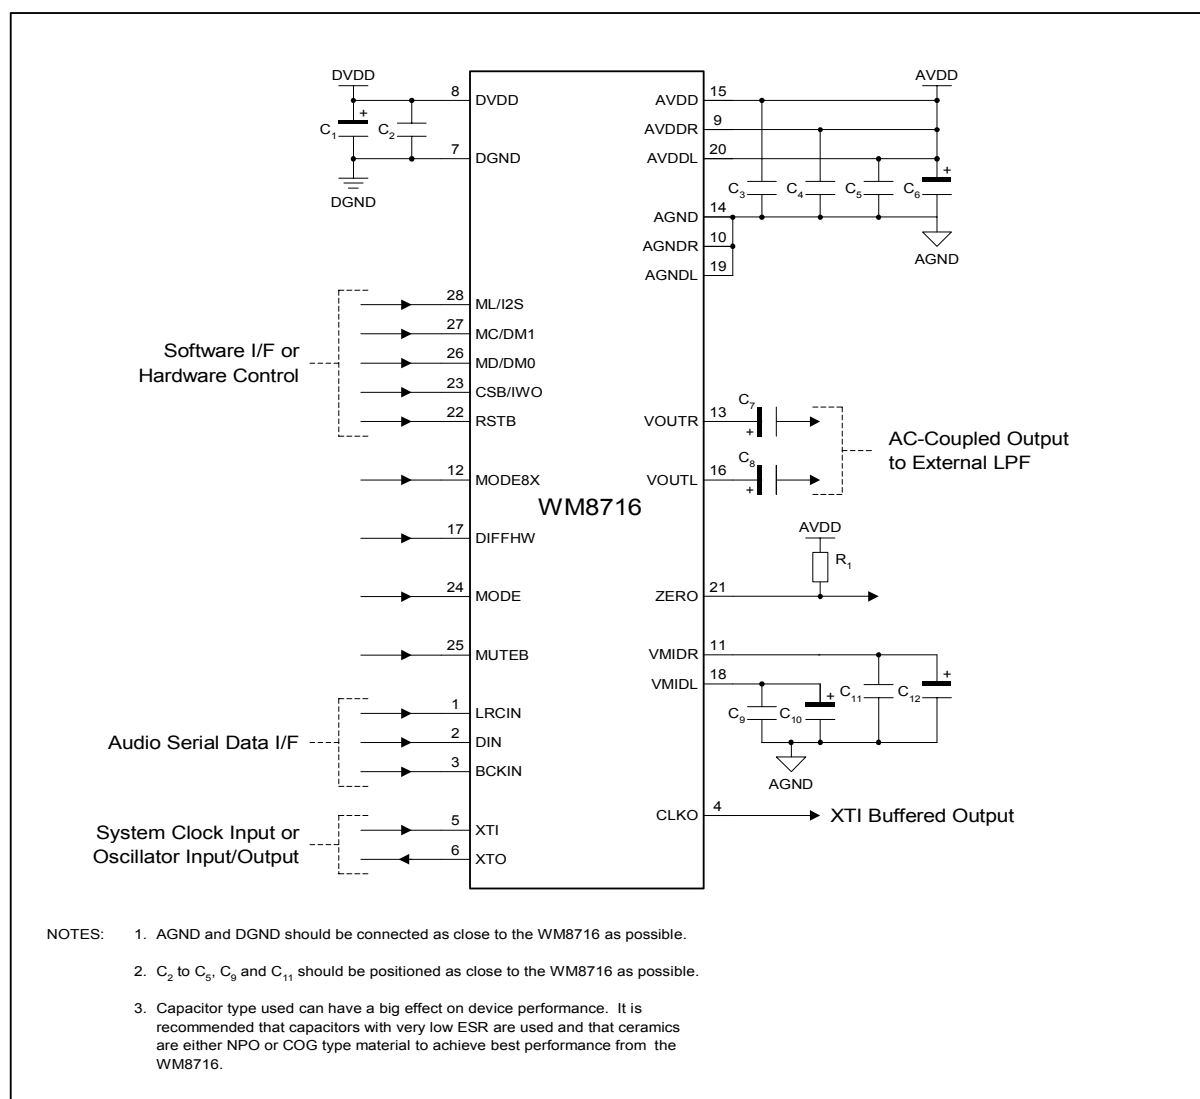


Figure 20 External Components Diagram

## RECOMMENDED EXTERNAL COMPONENTS VALUES

| COMPONENT REFERENCE | SUGGESTED VALUE | DESCRIPTION                                                   |
|---------------------|-----------------|---------------------------------------------------------------|
| C1 and C6           | 10μF            | De-coupling for DVDD and AVDD.                                |
| C2 to C5            | 0.1μF           | De-coupling for DVDD and AVDD.                                |
| C7 and C8           | 10μF            | Output AC coupling caps to remove VMID DC level from outputs. |
| C9 and C11          | 0.1μF           | Reference de-coupling capacitors for VMIDR and VMIDL.         |
| C10 and C12         | 10μF            |                                                               |
| R1                  | 10kΩ            | Resistor to AVDD for open drain output operation.             |

Table 22 External Components Description

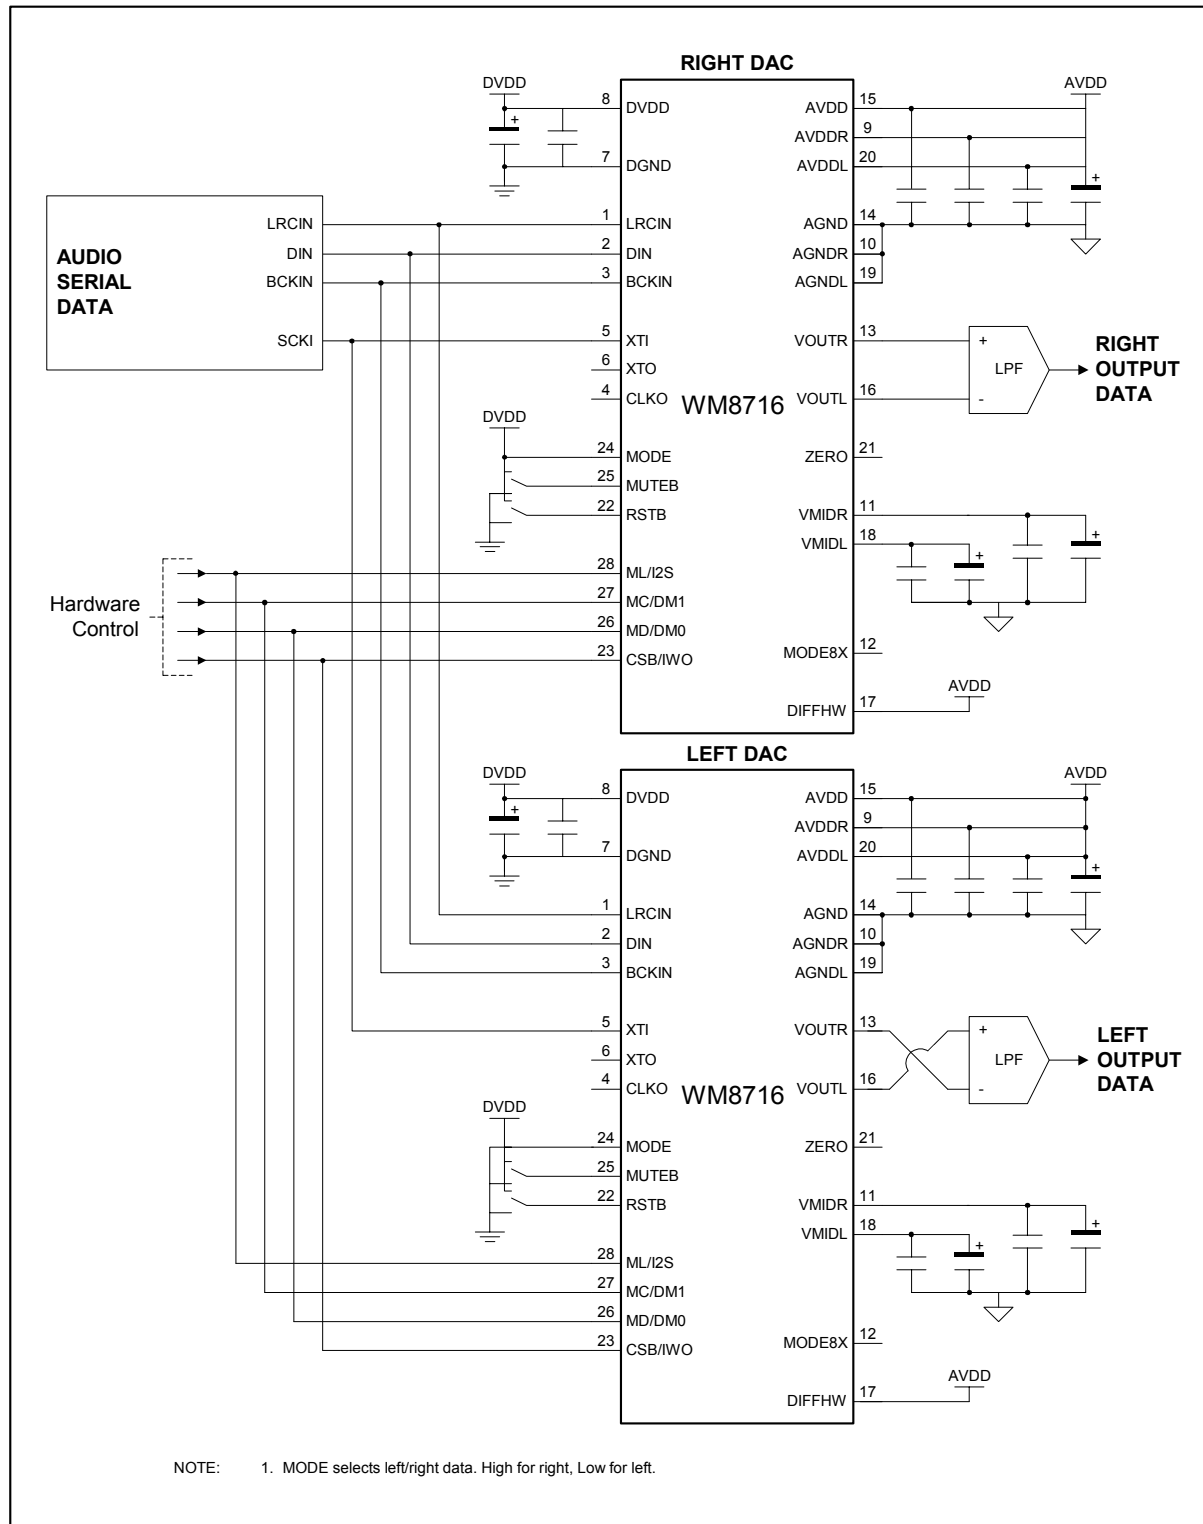


Figure 21 Example of 2 WM8716 Stereo DACs Configured in Hardware Differential Mode to Provide an Optimum Performance Stereo Output


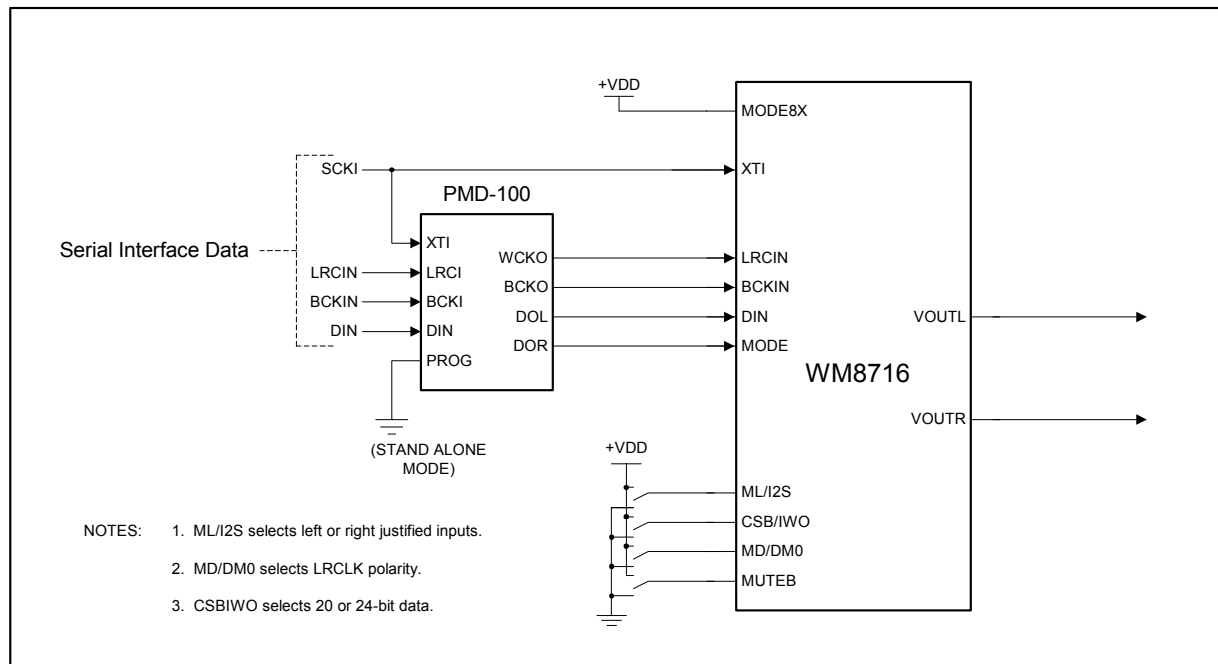


Figure 22 Example of WM8716 in MODE8X Operation

## PACKAGE DIMENSIONS

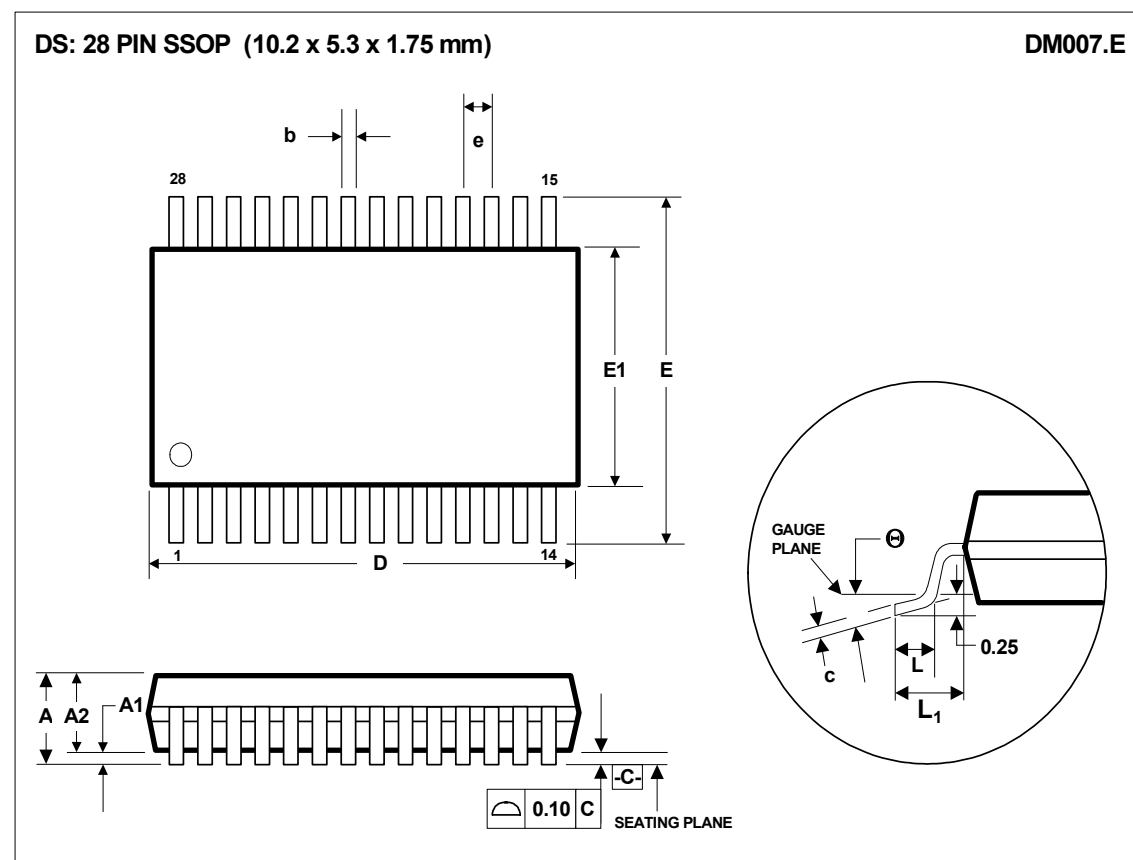

| Symbols              | Dimensions (mm)  |       |       |
|----------------------|------------------|-------|-------|
|                      | MIN              | NOM   | MAX   |
| <b>A</b>             | -----            | ----- | 2.0   |
| <b>A<sub>1</sub></b> | 0.05             | ----- | 0.25  |
| <b>A<sub>2</sub></b> | 1.65             | 1.75  | 1.85  |
| <b>b</b>             | 0.22             | 0.30  | 0.38  |
| <b>c</b>             | 0.09             | ----- | 0.25  |
| <b>D</b>             | 9.90             | 10.20 | 10.50 |
| <b>e</b>             | 0.65 BSC         |       |       |
| <b>E</b>             | 7.40             | 7.80  | 8.20  |
| <b>E<sub>1</sub></b> | 5.00             | 5.30  | 5.60  |
| <b>L</b>             | 0.55             | 0.75  | 0.95  |
| <b>L<sub>1</sub></b> | 1.25 REF         |       |       |
| <b>θ</b>             | 0°               | 4°    | 8°    |
| <b>REF:</b>          | JEDEC.95, MO-150 |       |       |

## NOTES:

- A. ALL LINEAR DIMENSIONS ARE IN MILLIMETERS.  
 B. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.  
 C. BODY DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSION, NOT TO EXCEED 0.20MM.  
 D. MEETS JEDEC.95 MO-150, VARIATION = AH. REFER TO THIS SPECIFICATION FOR FURTHER DETAILS.

## IMPORTANT NOTICE

Wolfson Microelectronics plc ("Wolfson") products and services are sold subject to Wolfson's terms and conditions of sale, delivery and payment supplied at the time of order acknowledgement.

Wolfson warrants performance of its products to the specifications in effect at the date of shipment. Wolfson reserves the right to make changes to its products and specifications or to discontinue any product or service without notice. Customers should therefore obtain the latest version of relevant information from Wolfson to verify that the information is current.

Testing and other quality control techniques are utilised to the extent Wolfson deems necessary to support its warranty. Specific testing of all parameters of each device is not necessarily performed unless required by law or regulation.

In order to minimise risks associated with customer applications, the customer must use adequate design and operating safeguards to minimise inherent or procedural hazards. Wolfson is not liable for applications assistance or customer product design. The customer is solely responsible for its selection and use of Wolfson products. Wolfson is not liable for such selection or use nor for use of any circuitry other than circuitry entirely embodied in a Wolfson product.

Wolfson's products are not intended for use in life support systems, appliances, nuclear systems or systems where malfunction can reasonably be expected to result in personal injury, death or severe property or environmental damage. Any use of products by the customer for such purposes is at the customer's own risk.

Wolfson does not grant any licence (express or implied) under any patent right, copyright, mask work right or other intellectual property right of Wolfson covering or relating to any combination, machine, or process in which its products or services might be or are used. Any provision or publication of any third party's products or services does not constitute Wolfson's approval, licence, warranty or endorsement thereof. Any third party trade marks contained in this document belong to the respective third party owner.

Reproduction of information from Wolfson datasheets is permissible only if reproduction is without alteration and is accompanied by all associated copyright, proprietary and other notices (including this notice) and conditions. Wolfson is not liable for any unauthorised alteration of such information or for any reliance placed thereon.

Any representations made, warranties given, and/or liabilities accepted by any person which differ from those contained in this datasheet or in Wolfson's standard terms and conditions of sale, delivery and payment are made, given and/or accepted at that person's own risk. Wolfson is not liable for any such representations, warranties or liabilities or for any reliance placed thereon by any person.

## ADDRESS:

Wolfson Microelectronics plc  
Westfield House  
26 Westfield Road  
Edinburgh  
EH11 2QB  
United Kingdom

Tel :: +44 (0)131 272 7000  
Fax :: +44 (0)131 272 7001  
Email :: [sales@wolfsonmicro.com](mailto:sales@wolfsonmicro.com)