


M-5321 2

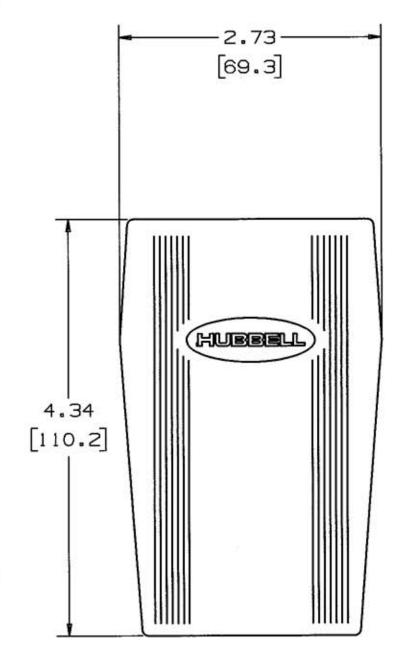

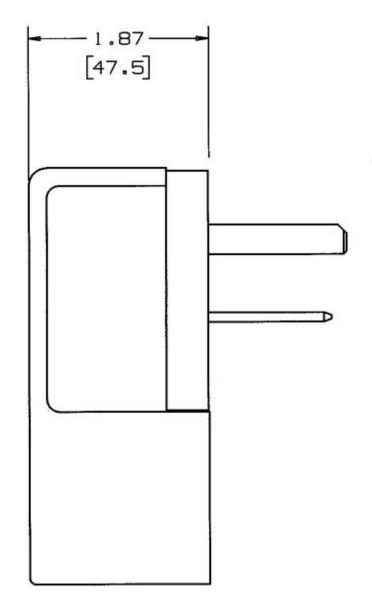

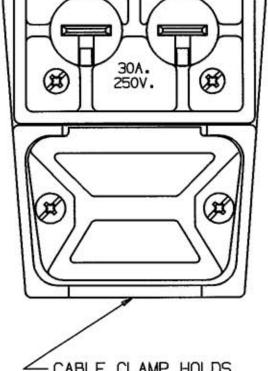

(B)LISTED PLUG 231A CABLE CLAMP HOLDS
CABLE FROM Ø .62 [15.8]
TO Ø 1.18 [30.0]

2 REDRAWN ON CAD WITH CHANGES; TCM
DECIMAL DIMENSIONS WERE
FRACTIONAL ADDED DUAL
DIMENSIONING; ADDED NOTES
1 & 2; REVISED TITLE; COMBO
SCREWS WERE STRAIGHT BLADE;
PER DCN #8682.
JMN TCM 8/22/01 SYM REVISIONS APP DATE

LIST OF PARTS

MATERIAL

NYLON

NYLON

NYLON .100 BRASS

.078 BRASS

SUPERSEDES DRAWING DATED 5-25-71

FINISH BLACK

BLACK

NATURAL

REPAIRABLE

NON-REPAIRABLE

 \boxtimes

⋜

DESCRIPTION

BODY

CABLE CLAMP

BLADE HOLDER

BLADES

GROUNDING BLADE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

ANGLE PLUG 30AMP 250V NEMA 6-30P

TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES

WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT DR. BY EPS APP. BY JNC

TR. BY JMN SCALE 1:1 CHK'D BY TCM DATE 8/23/01

NOTES: (UNLESS OTHERWISE SPECIFIED)

1) DIMENSION FORMAT IS: INCHES [mm]

2) DIMENSIONS SHOWN ON THIS DRAWING ARE NOMINAL VALUES FOR GENERAL USE ONLY. ACTUAL PART TOLERANCES MUST BE OBTAINED FROM HUBBELL ENGINEERING.