



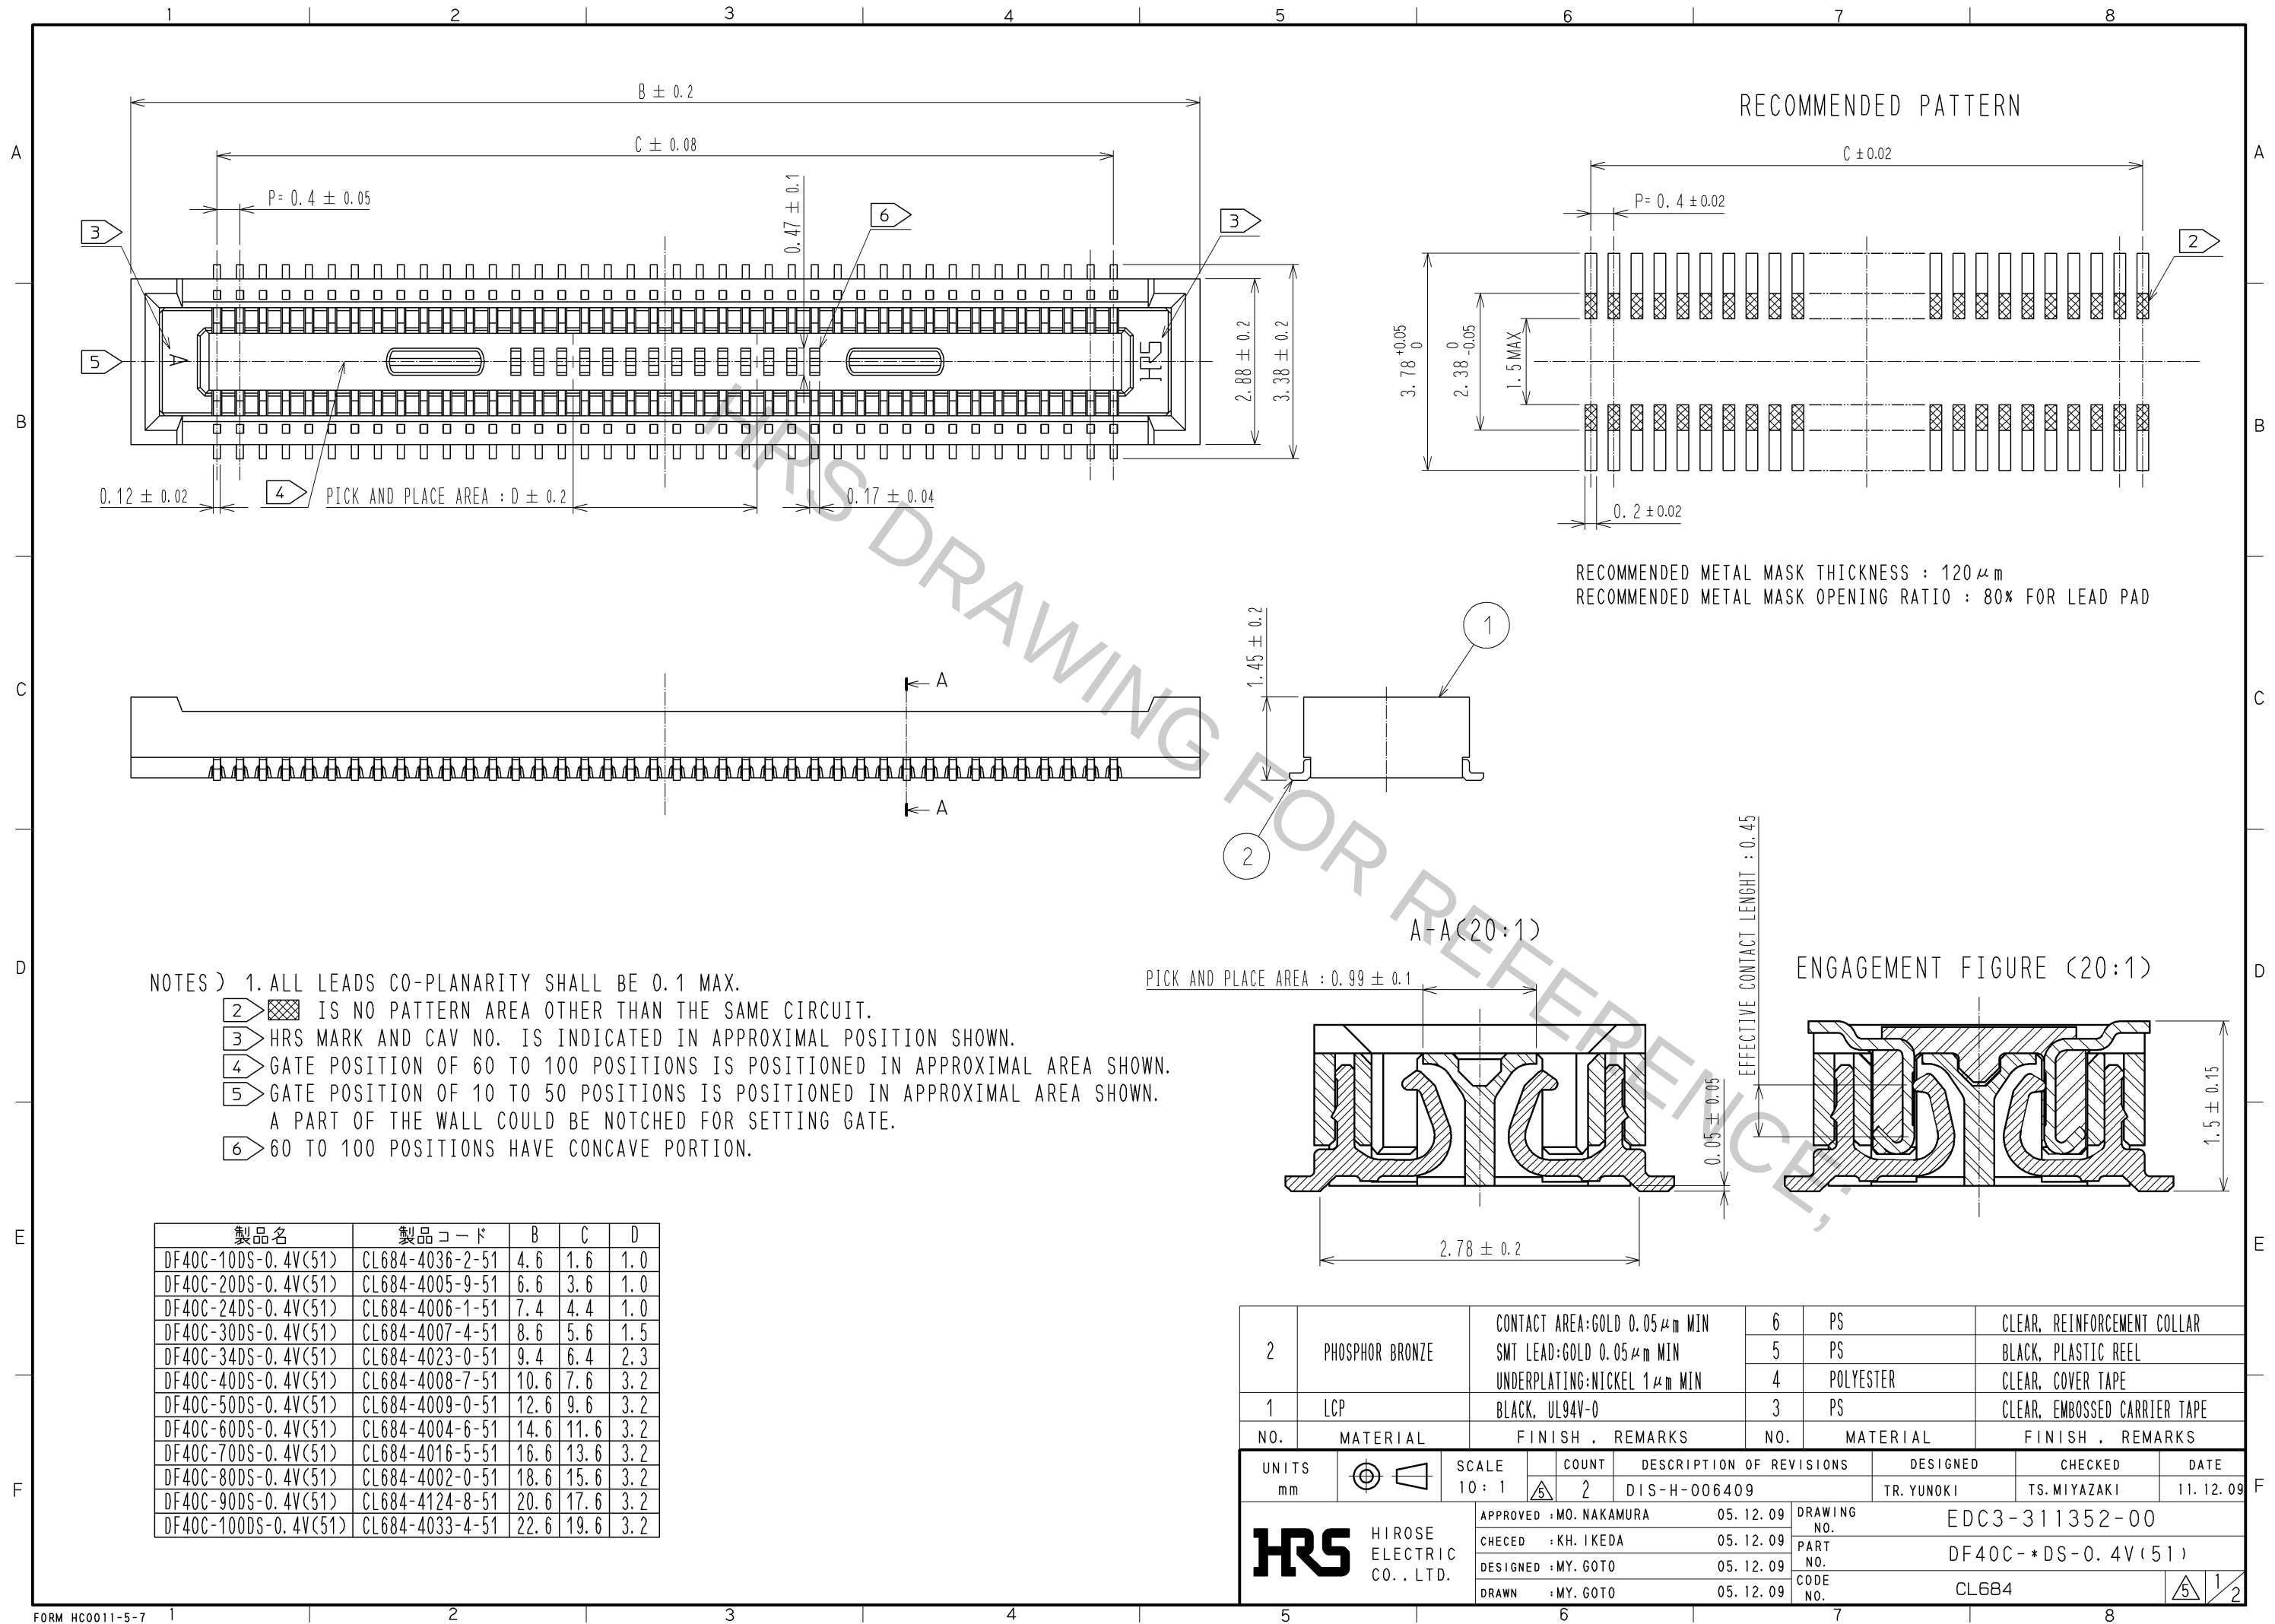


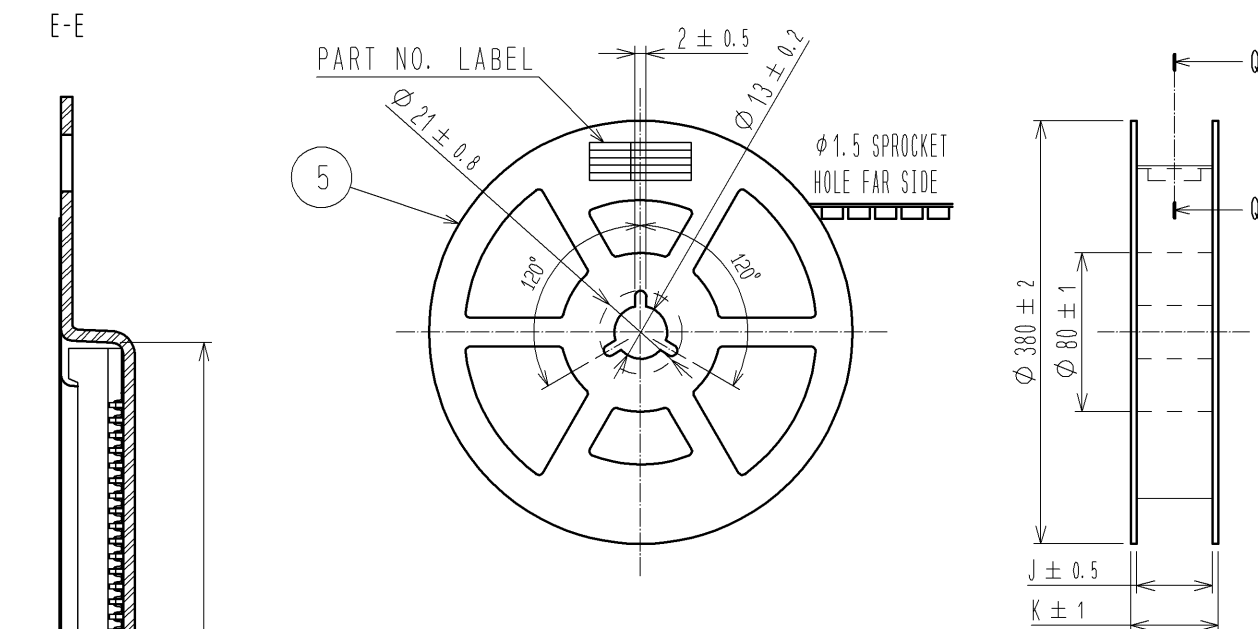


DETAIL OF PART NO. LABEL

製造年月日	** ** *
製品コード	CL684-****-51
製品名	DF40C-DS-0.4V(51)
数量	5000
納入者	ヒロセ電機(株)

DATE OF MANUFACTURED
CODE NO.
PART NO.
QUANTITY
SUPPLIER

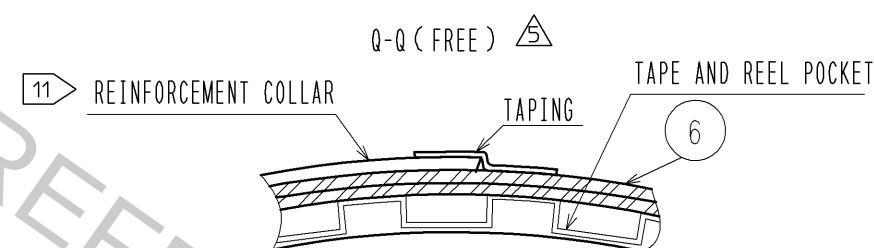

PART NO.	G	H	J	K	L	M
DF40C-100S-0.4V(51)	16	7.5	17.5	21.5	—	4.
DF40C-200S-0.4V(51)	16	7.5	17.5	21.5	—	6.
DF40C-240S-0.4V(51)	16	7.5	17.5	21.5	—	7.
DF40C-300S-0.4V(51)	24	11.5	25.5	29.5	—	8.
DF40C-340S-0.4V(51)	24	11.5	25.5	29.5	—	8.
DF40C-400S-0.4V(51)	24	11.5	25.5	29.5	—	10.
DF40C-500S-0.4V(51)	24	11.5	25.5	29.5	—	12.
DF40C-600S-0.4V(51)	24	11.5	25.5	29.5	—	14.
DF40C-700S-0.4V(51)	32	14.2	33.5	37.5	28.4	16.
DF40C-800S-0.4V(51)	32	14.2	33.5	37.5	28.4	18.
DF40C-900S-0.4V(51)	44	20.2	45.5	49.5	40.4	20.
DF40C-1000S-0.4V(51)	44	20.2	45.5	49.5	40.4	22.

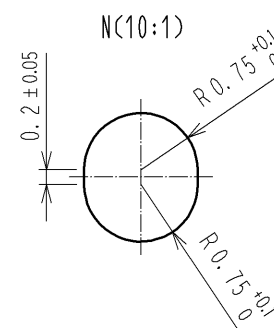

- NOTES) 7. PER REEL 5000 CONNECTORS.
8. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
9 REFER TO JIS C 0806 (PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
10 10 TO 60 POSITIONS EMBOSSED CARRIER TAPE HAS THE SPROCKET HOLE ON ONE SIDES.
11 AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

HRS	DRAWING NO.	EDC3-311352-00	
	PART NO.	DF40C-*DS-0.4V(51)	
	CODE NO.	CL684	5 2