

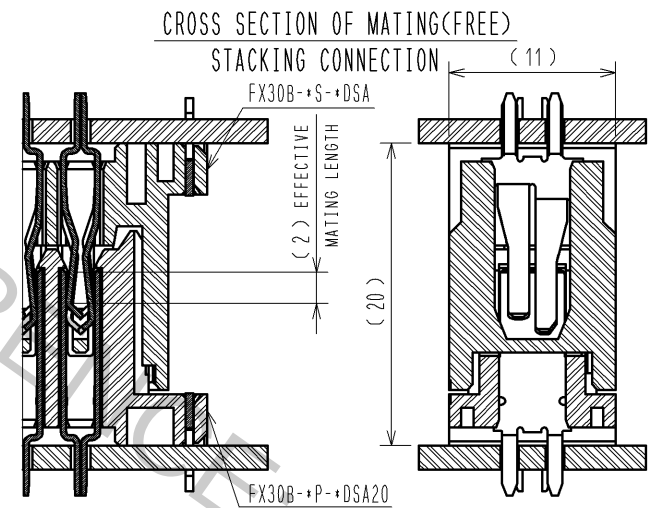
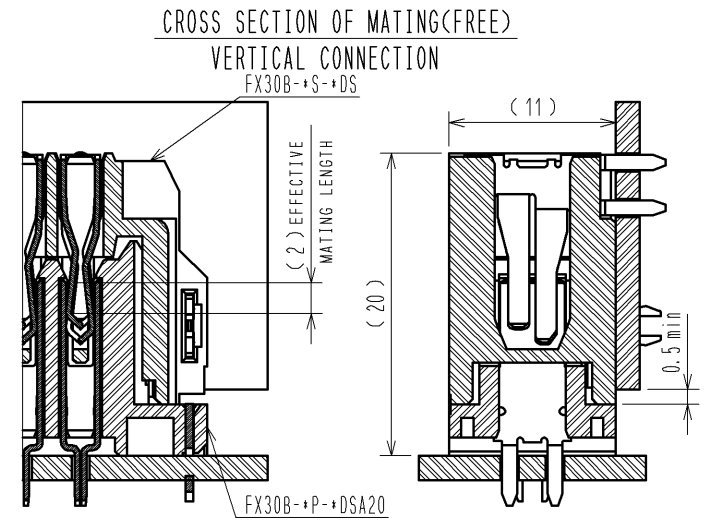
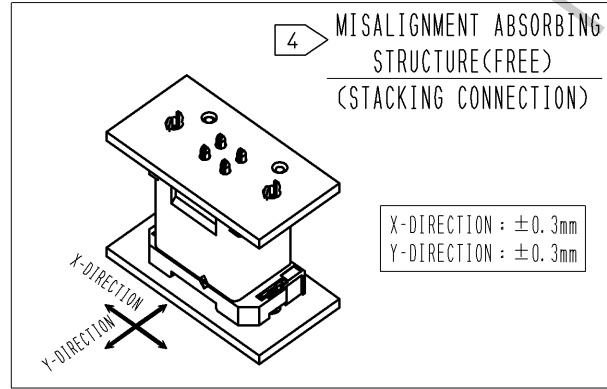



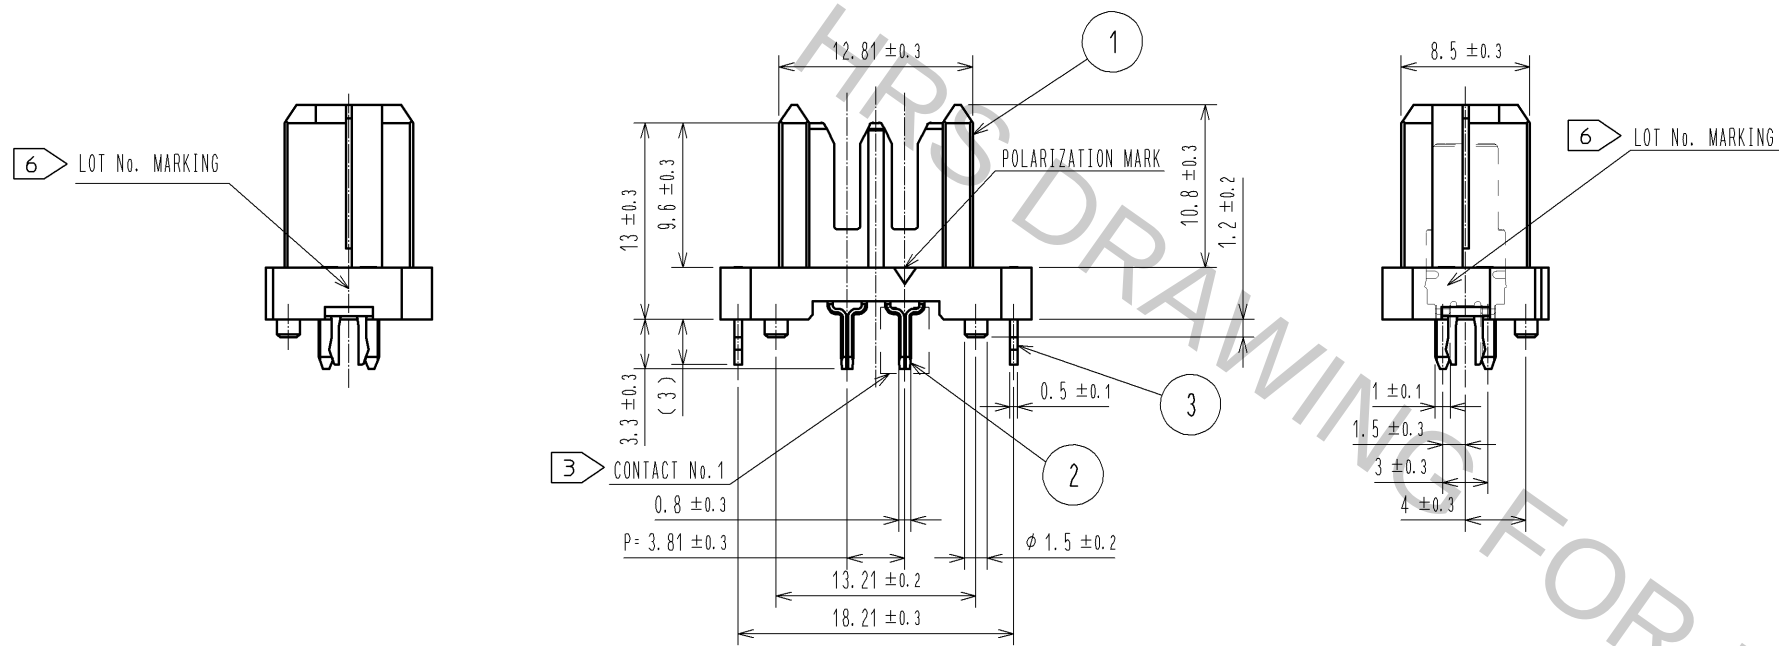

- NOTE
- THIS PRODUCT IS PACKAGED IN TRAY. (49pcs/TRAY)
 - BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN'T AFFECT QUALITY LEVEL. ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
 - FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL) COMPOSE ONE LINE.
 - MISALIGNMENT ABSORBING RANGE: ± 0.3mm max.
 - THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
 - LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.

2	COPPER ALLOY	CONTACT AREA: GOLD-PLATING 0.1 μm	4	POLYSTYRENE	TIN-PLATING 3.0 μm
		LEAD AREA: TIN-PLATING 1.0 μm			
		UNDER PLATING: NICKEL 1.0 μm			
1	POLYAMIDE	BLACK UL94V-0	3	PHOSPHOR BRONZE	UNDER PLATING: NICKEL 1.0 μm
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-F-006956	DESIGNED DK. AIMOTO
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	13. 03. 07	DRAWING NO.	EDC3-347255-00
		CHECKED : KI. HIROKAWA	13. 03. 07	PART NO.	FX30B-2P-3. 81DSA20
		DESIGNED : DK. AIMOTO	13. 03. 07	CODE NO.	CL570-3100-3-00
		DRAWN : DK. AIMOTO	13. 03. 07		
					DATE 13. 08. 26

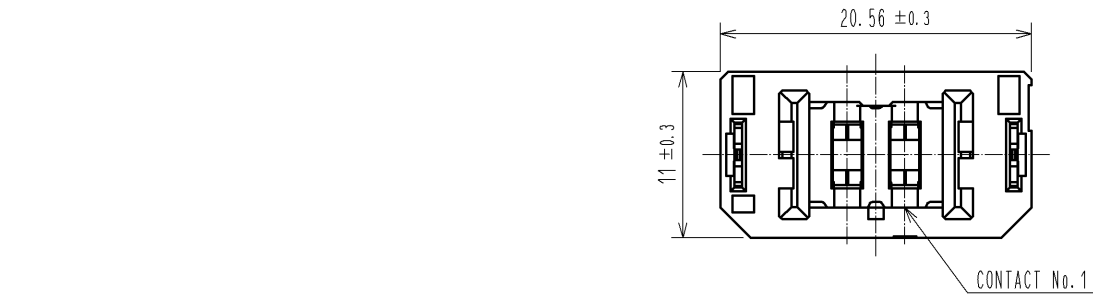

DRAWING NO.	EDC3-347255-00		
PART NO.	FX30B-2P-3.81DSA20		
CODE NO.	CL570-3100-3-00		$\frac{2}{2}$