


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓						✓				
✓						✓				
✓						✓				

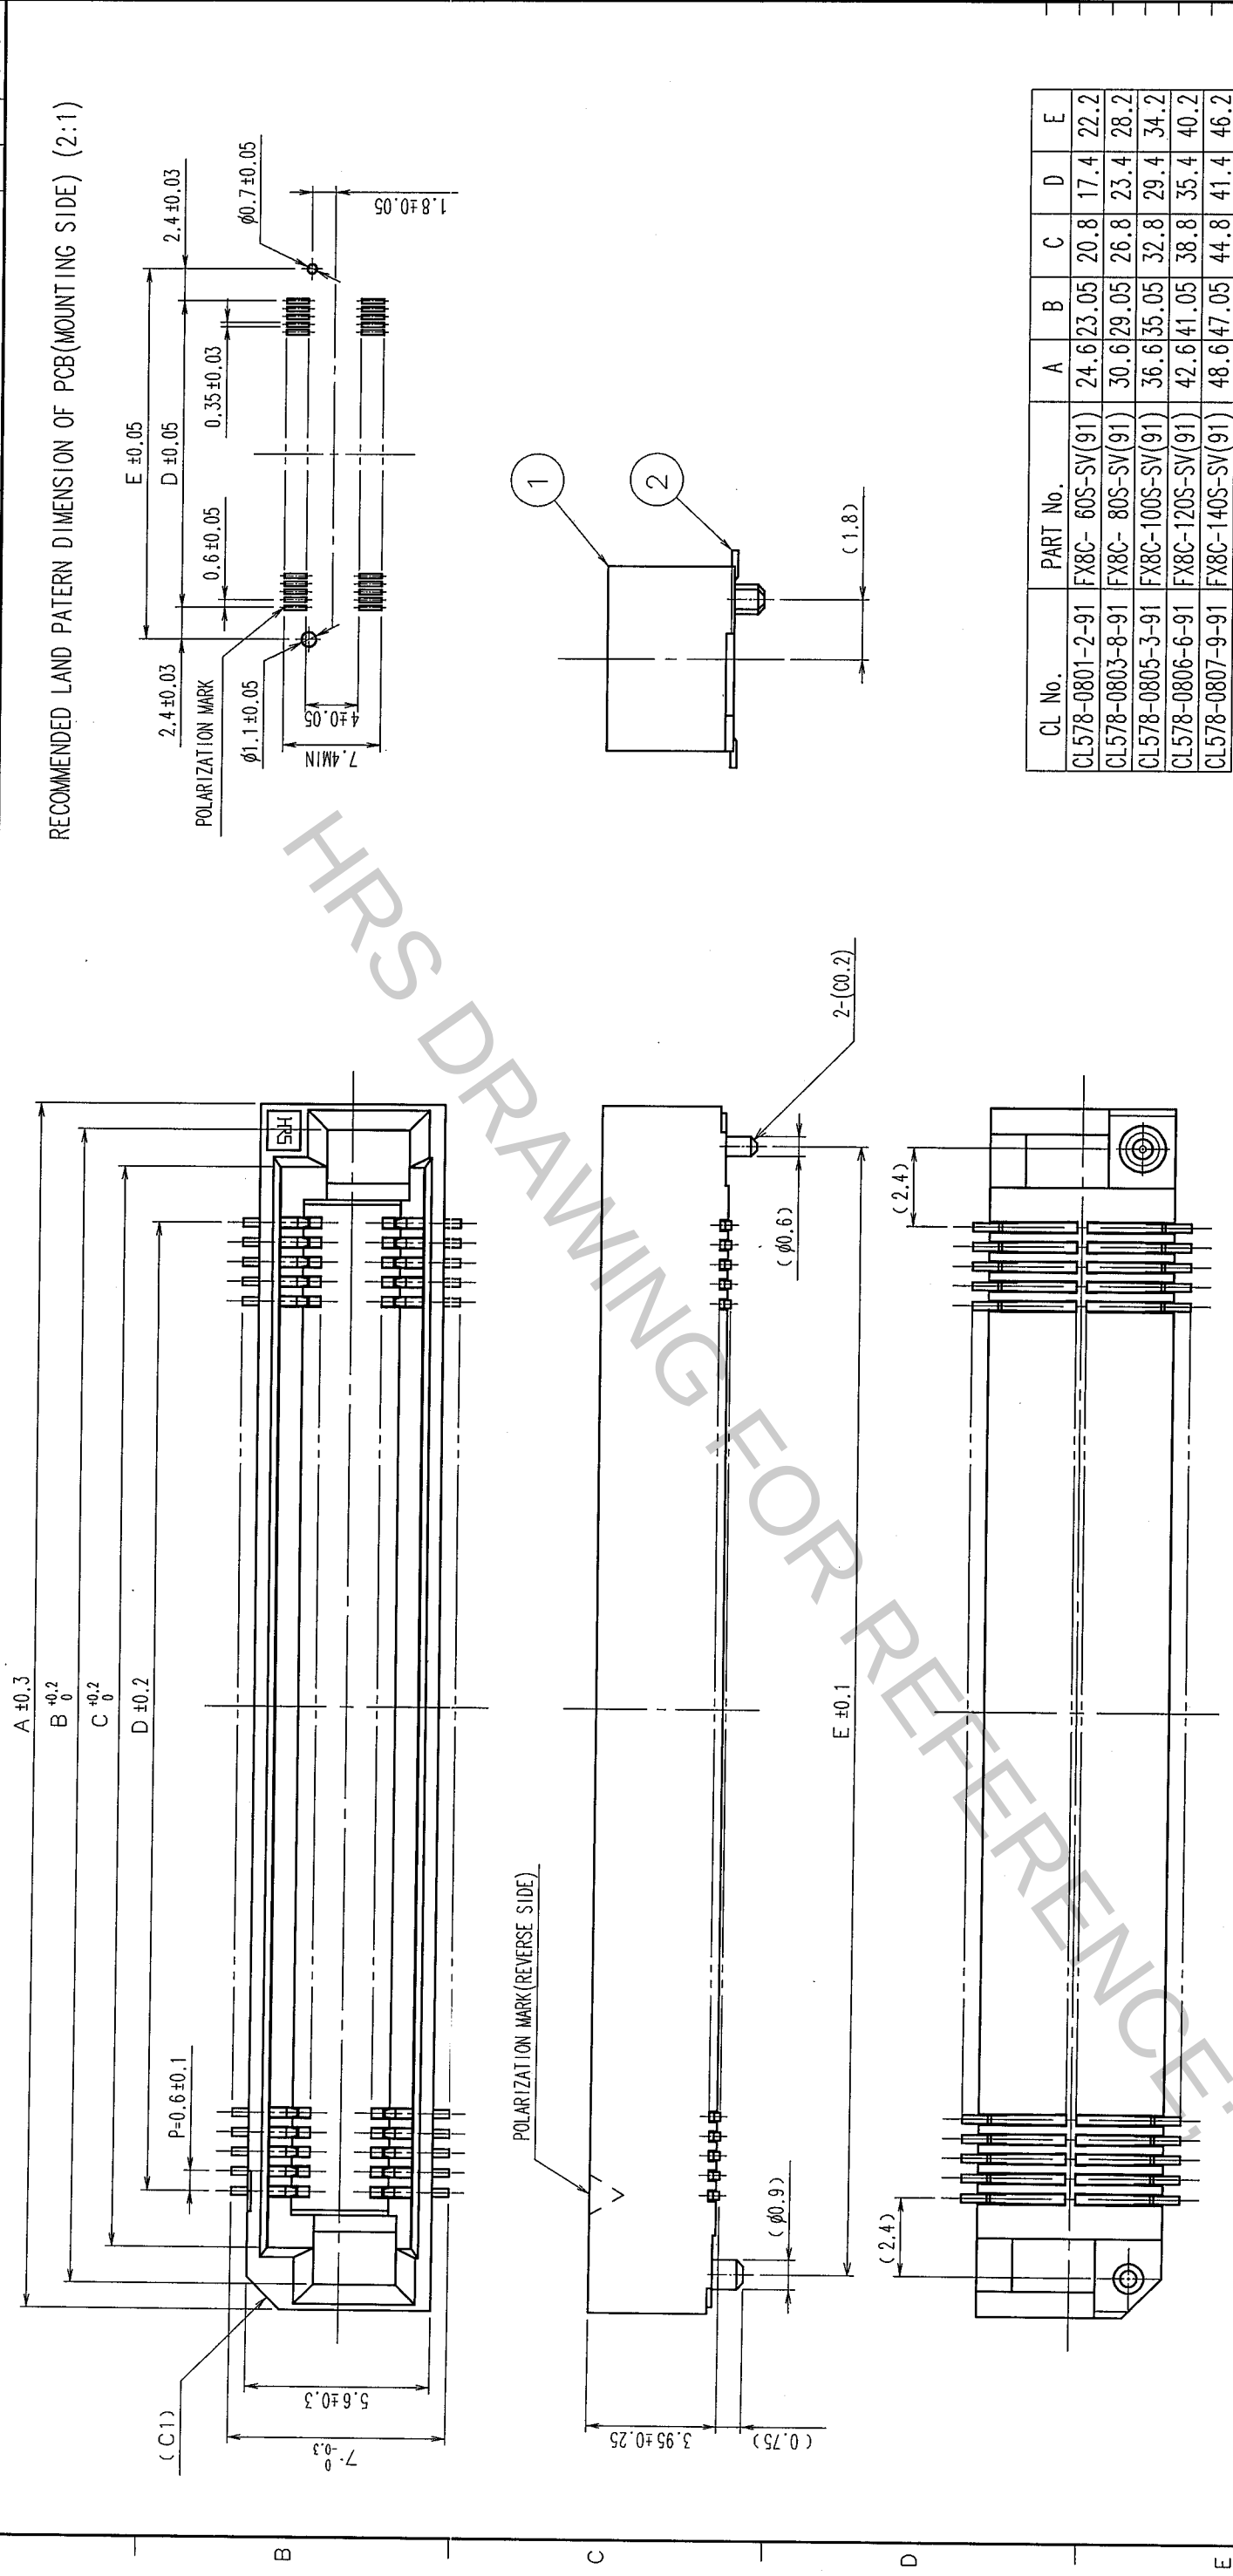

CL No.	PART No.	A	B	C	D	E
CL578-0801-2-91	FX8C- 60S-SV(91)	24.6	23.05	20.8	17.4	22.2
CL578-0803-8-91	FX8C- 80S-SV(91)	30.6	29.05	26.8	23.4	28.2
CL578-0805-3-91	FX8C-100S-SV(91)	36.6	35.05	32.8	29.4	34.2
CL578-0806-6-91	FX8C-120S-SV(91)	42.6	41.05	38.8	35.4	40.2
CL578-0807-9-91	FX8C-140S-SV(91)	48.6	47.05	44.8	41.4	46.2

1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μ m min. MOUNTING AREA : GOLD FLASH UNDER PLATING : NICKEL 1.5μ m min.	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)				DRAWN	DESIGNED	CHECKED	APPROVED
				T. Noda	K. Doi	H. Okawa	H. Okawa
				'05.03.16	'05.03.16	'05.03.16	'05.03.16
DRAWING NO.		PART NO.		RELEASED			
EDC3-151022-21		FX8C-※※S-SV(91)					
SCALE		5 : 1					
UNITS		mm					
HRS		HIROSE ELECTRIC CO., LTD		CL578			
				1/2			

NOTE

- 1 LEAD CO-PLANARITY SHALL BE 0.1 mm MAX.
- 2 FOR DETAILS, SEE THE SECTION CONCERNING THE DELIVERY FORM ON NEXT PAGE.
- 3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED DEPENDS ON CIRCUMSTANCES.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO	PCK			
----	-----	--	--	--

