
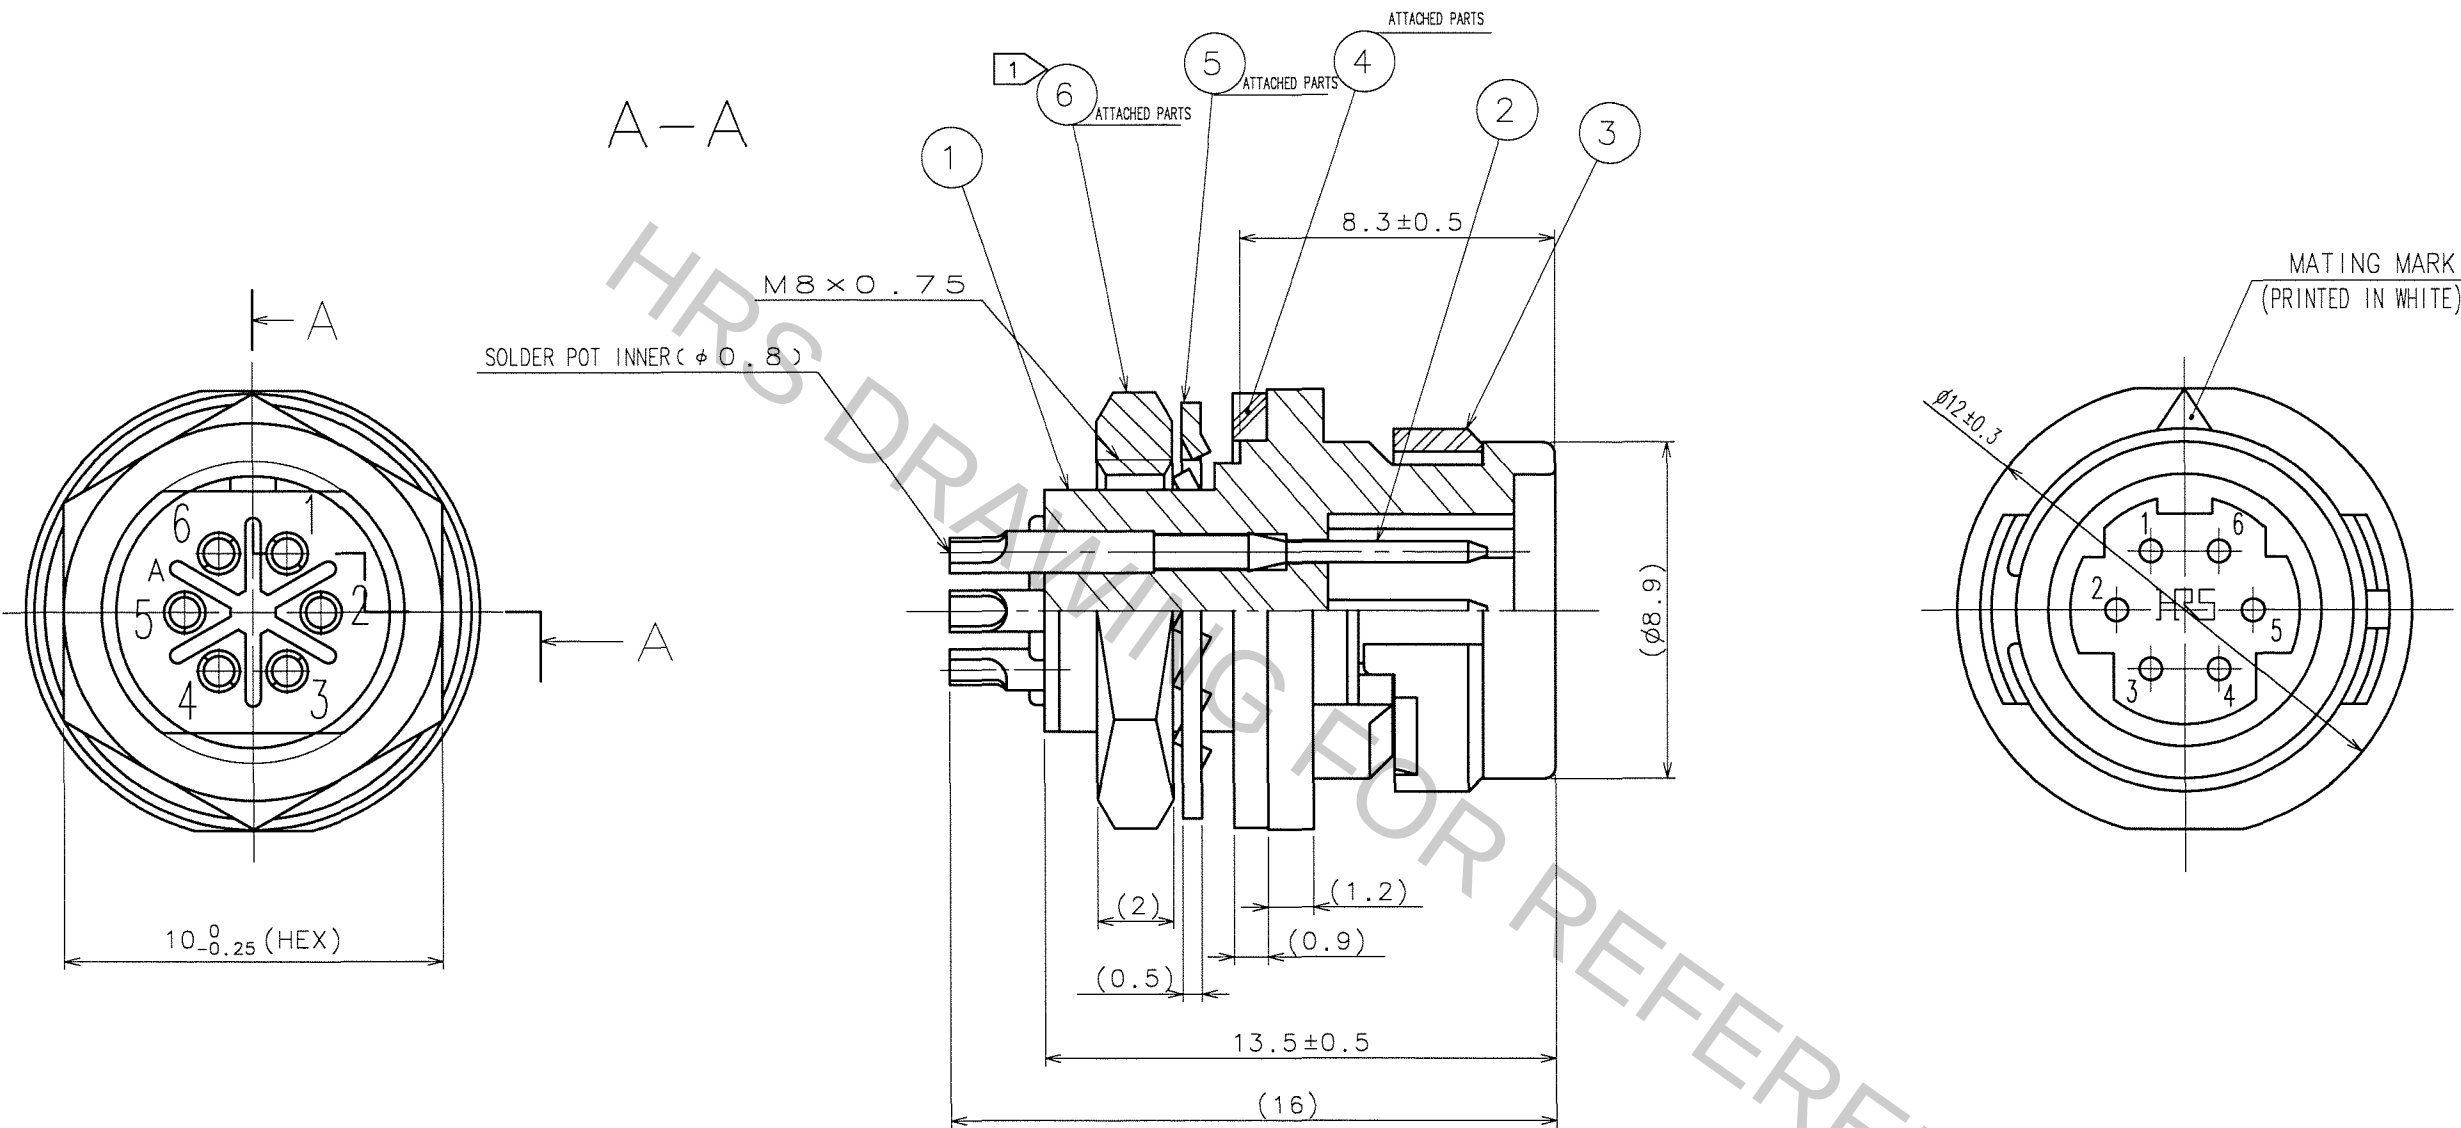


Aug.1.2016 Copyright 2016 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	1	DIS-C-000585	T.K	E.K	07.07.27						



- NOTES
- 1 THE RECOMMENDED CLUMP TORQUE OF REF. NO. 6 TO BE 0.5N·m.
LOCTITE 271, LOCPRIMER 7649, LOCTITE JAPAN IS RECOMMENDED TO PREVENT REF. NO. 6 FROM LOOSENING.
 - 2 TABLE FOR SOLDERING IS AVAILABLE HR30-6R-6P-T01.
 - 3 SURFACE PLATING: GOLD PLATING 0.2μm min.
UNDER PLATING: NICKEL PLATING 2μm min.

3	PPS	(BLACK)	6	BRASS ¹	NICKEL PLATING		
2	BRASS	3	5	PHOSPHOR BRONZE	NICKEL PLATING		
1	PPS	(BLACK) UL94V-0	4	CR	(BLACK)		
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			M.HANYU	H.NAGANO	E.KUNII	M.SATO	
			'05 8 8	'05 8 8	'05 8 10	'05 8 10	. .
		DRAWING NO.		PART NO.			
SCALE		EDC3-112023-71		HR30-6R-6P(71)			
5 : 1		 HIROSE ELECTRIC CO., LTD		CODE NO.		CL130-1009-0-71	
UNITS							
mm						1/1	

PANEL INSTALLATION HOLE
PANEL THICKNESS (0.7~2)

TO
R