
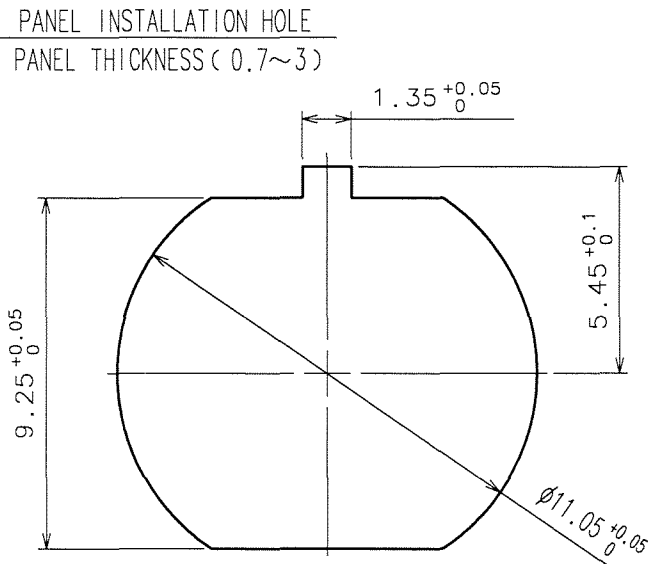
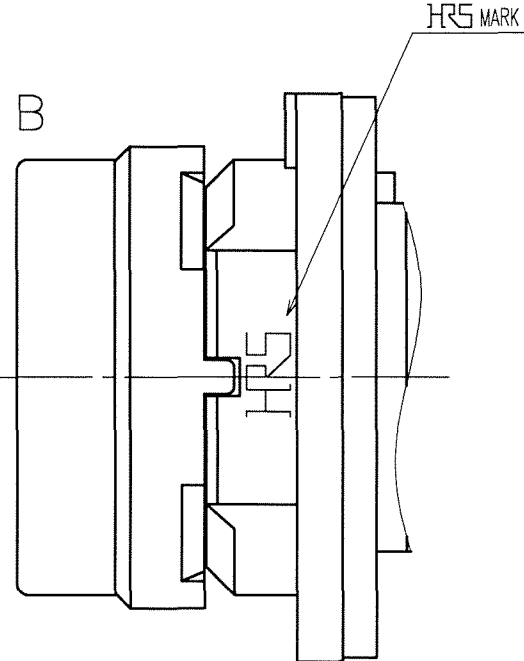
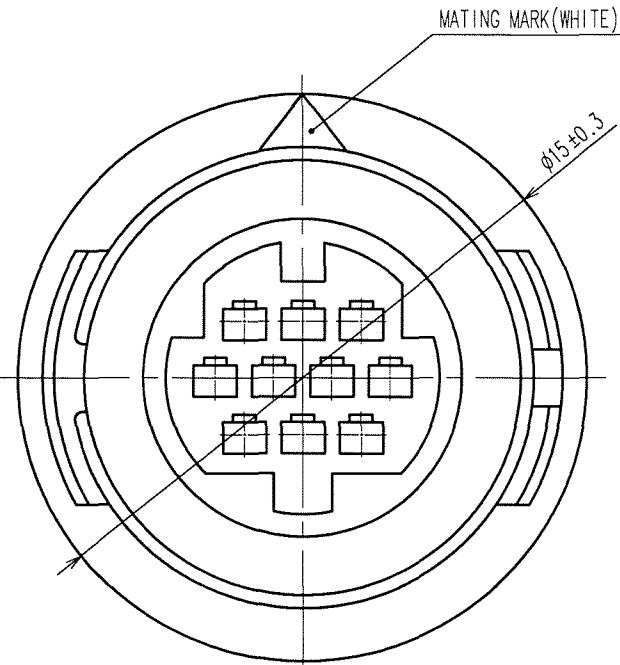
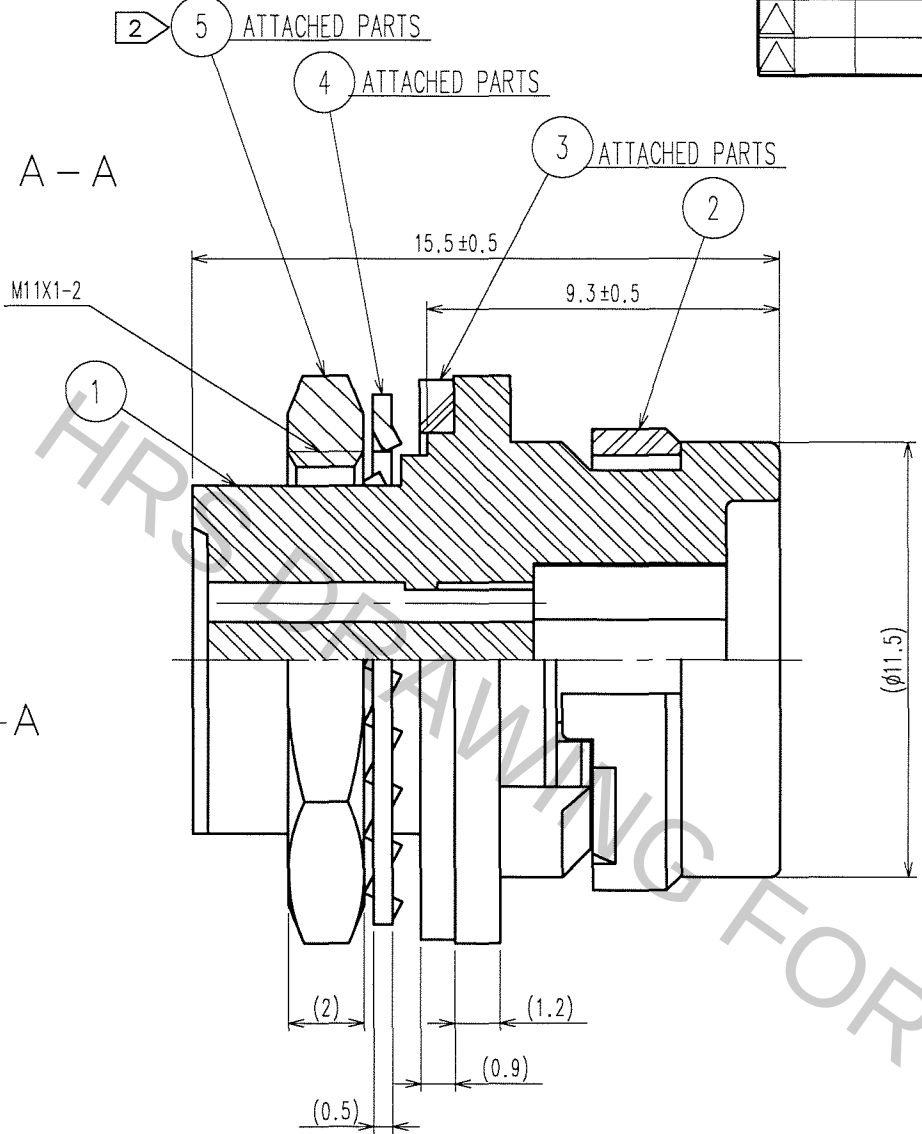
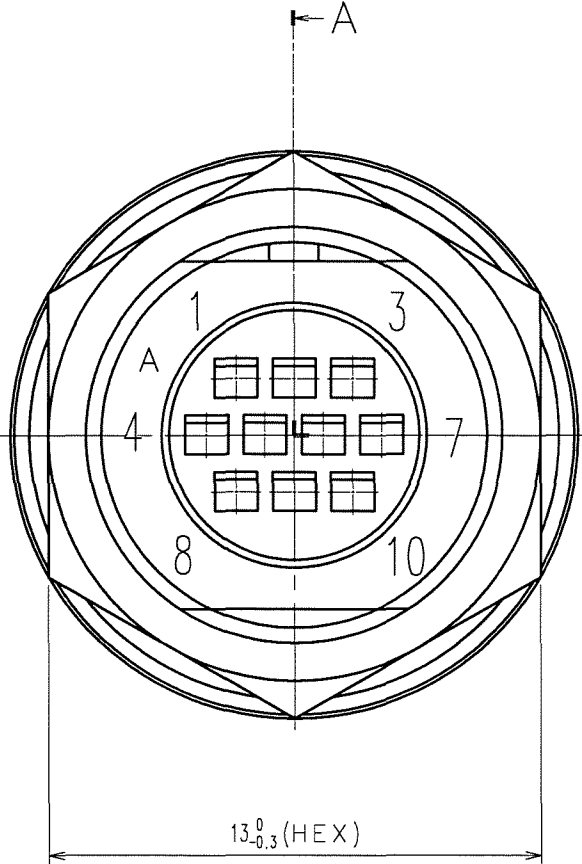


Aug.1.2016 Copyright 2016 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					



NOTES 1 APPLICABLE CRIMPING CONTACT:HR30-PC-211
(APPLICABLE WIRE: 26~30 AWG WIRE JACKET DIAMETER:φ1 MAX)
APPLICABLE CRIMP CONTACT EXTRACTION TOOL:HR30-TP
2 THE RECOMMENDED CLUMP TORQUE OF REF. NO.⑤ TO BE 0.8N·m.
LOCTITE 271, LOCPRIMER 7649, ROCTITE JAPAN IS RECOMMENDED TO PREVENT REF. NO.⑤ FROM LOOSENING.

3	CR	(BLACK)		5	BRASS 	NICKEL PLATING	
2	PPS	(BLACK)	UL94V-0	4	PHOSPHOR BRONZE	NICKEL PLATING	
1	PPS	(BLACK)	UL94V-0				
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			M.HANYU	H.NAGANO	E.KUNII	M.SATO	
			'05 8 10	'05 8 10	'05 8 10	'05 8 10	. .
		DRAWING NO.			PART NO.		
SCALE		EDC3-112154-71			HR30-7R-10PC(71)		
5 : 1							
UNITS		CODE NO.			CL130-1012-5-71		
mm		 HIROSE ELECTRIC CO., LTD			1/1		

TO
R