

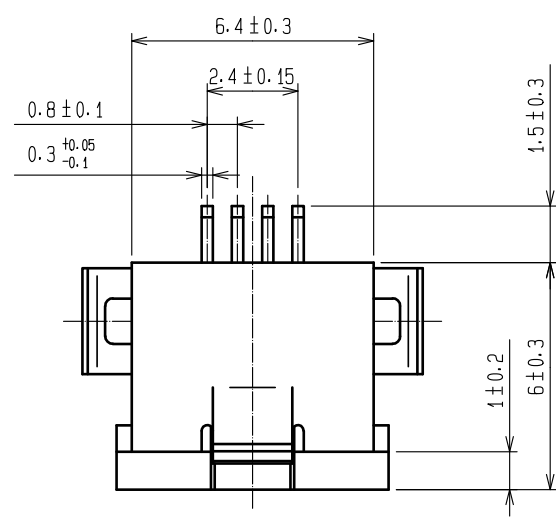
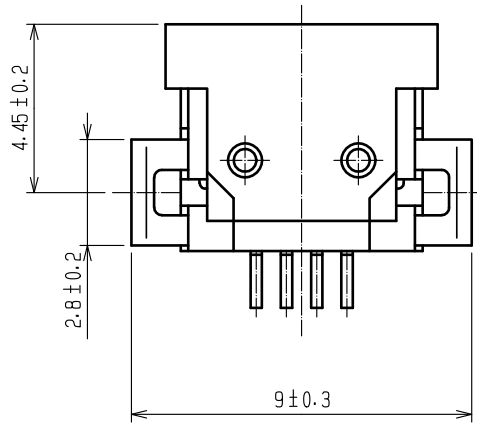
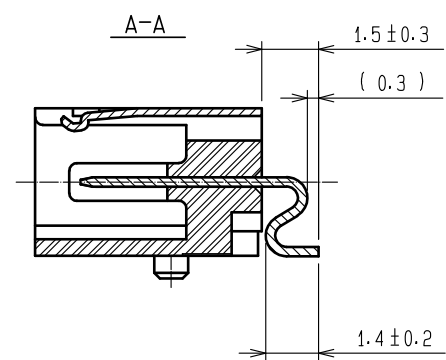
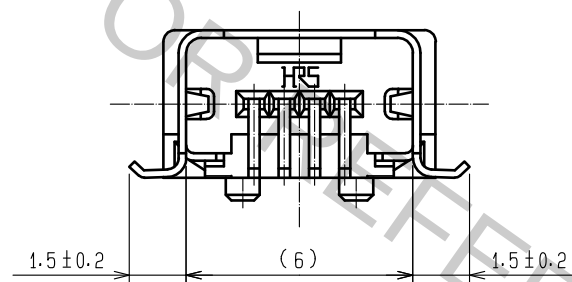
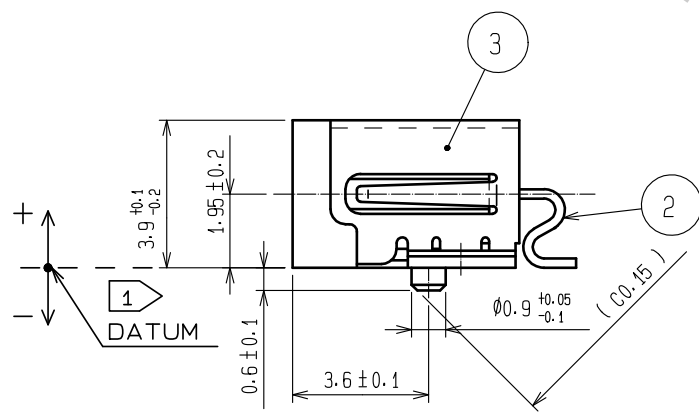
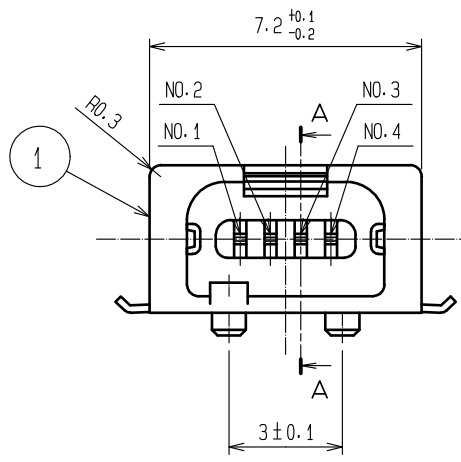


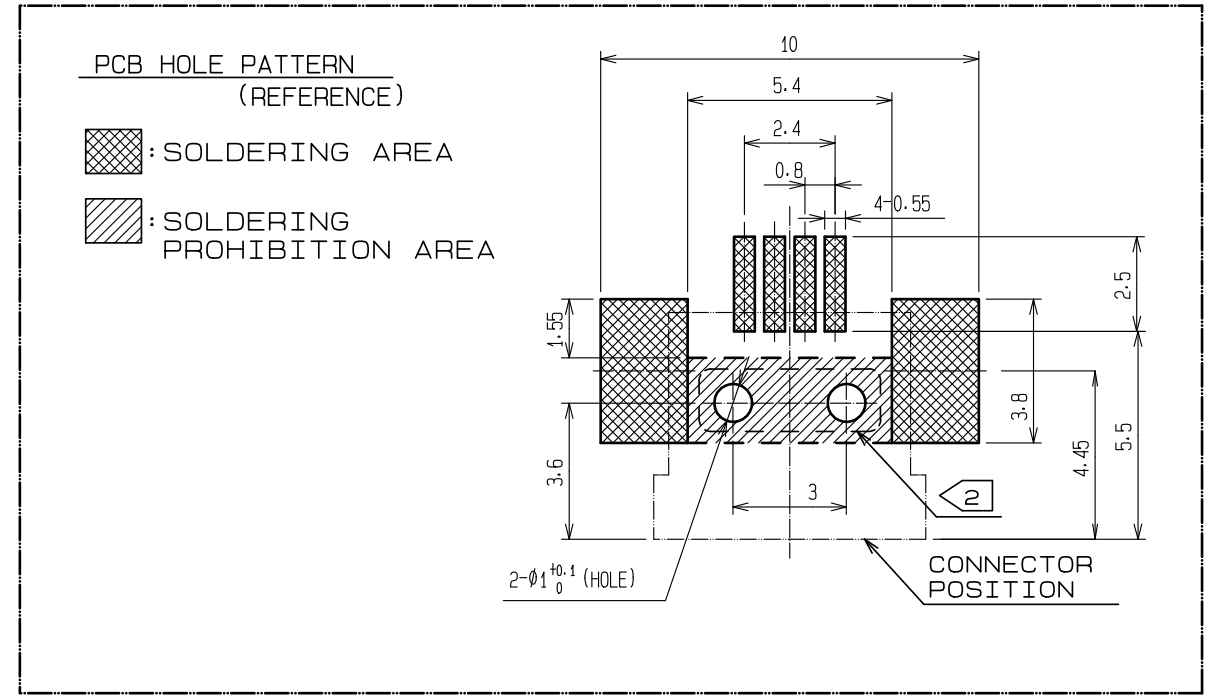

2 FIXED BY EQUIPMENT
(REFERENCE)



NOTES

- 1 COPLANARITY (INCLUDING METAL FITTING) SHALL BE 0.0/-0.15 FROM DATUM.
- 2 FIXING TO PCB OF THIS PRODUCT IS SOLDER TYPE.
WE RECOMMEND TO USE ADHESIVE ON PCB SURFACE.
PLEASE ALSO FIX THIS PRODUCT BY THE BODY OF EQUIPMENT ITSELF.
- 3. DIRECTIONS FOR USE.
•PLEASE DO NOT USE FOR THE PURPOSE OF INTERRUPTING THE CURRENT.

3	STAINLESS STEEL	PLATING : GOLD FLASH
2	COPPER ALLOY	CONTACT AREA : PALLADIUM-NICKEL 0.7µm + GOLD 0.2µm min. LEAD AREA : GOLD FLASH UNDER PLATING : NICKEL 1.27µm min.
1	POLYAMIDE	BLACK UL94V-0
NO.	MATERIAL	FINISH . REMARKS

UNITS mm	SCALE 5 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.	APPROVED : NM. NISHIMATSU	15.10.27	DRAWING NO.	EDC-120842-30-00		
	CHECKED : KN. ICHIKAWA	15.10.27	PART NO.	MQ172X-4PA(30)		
	DESIGNED : TS. ITO	15.10.27	CODE NO.	CL206-2000-6-30		
	DRAWN : AK. AKIYAMA	15.10.27				