


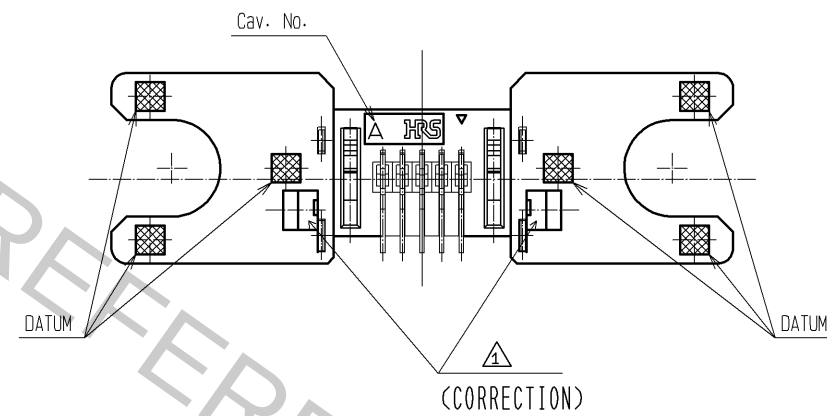


|                           |                  |                               |  |                                   |                          |                                |              |                |            |
|---------------------------|------------------|-------------------------------|--|-----------------------------------|--------------------------|--------------------------------|--------------|----------------|------------|
| 2                         | COPPER ALLOY     | 5                             |  | 4                                 | STAINLESS STEEL          | SELECTIVE TIN PLATING 1μm MIN. |              |                |            |
| 1                         | POLYAMIDE OR LCP | BLACK UL94V-0                 |  | 3                                 | COPPER ALLOY             | 5                              |              |                |            |
| NO.                       | MATERIAL         | FINISH, REMARKS               |  | NO.                               | MATERIAL                 | FINISH, REMARKS                |              |                |            |
| UNITS<br>mm               |                  | SCALE<br>4 : 1                |  | COUNT                             | DESCRIPTION OF REVISIONS |                                | DESIGNED     | CHECKED        | DATE       |
|                           |                  |                               |  | 1                                 | DIS-E-004612             |                                | KN. ICHIKAWA | NM. NISHIMATSU | 13. 04. 15 |
|                           |                  |                               |  | APPROVED : A0. SUZUKI 07. 01. 22  |                          | DRAWING NO. EDC3-126145-00     |              |                |            |
|                           |                  |                               |  | CHECKED : KN. ICHIKAWA 07. 01. 22 |                          | PART NO. ZX80-B-5SA            |              |                |            |
|                           |                  |                               |  | DESIGNED : HK. TANAKA 07. 01. 22  |                          | CODE NO. CL242-0019-7-00       |              |                |            |
| HIROSE ELECTRIC CO., LTD. |                  | DRAWN : HK. TANAKA 07. 01. 22 |  |                                   |                          |                                |              |                |            |
|                           |                  |                               |  |                                   |                          |                                |              |                |            |


3 FIG-2 DRAWING FOR PACKING(AT 2000 pcs PACKING.)

THIS IS ONE EXAMPLE OF PACKING METHOD, AND IT MAY CHANGE WITHOUT ANY NOTICE, DEPENDING ON VOLUME.


1. STORE CONNECTORS IN A TRAY.

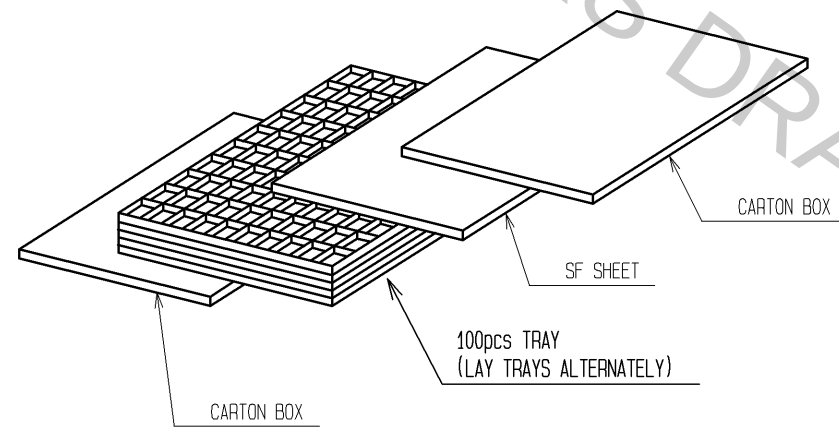


2. BAND TRAYS AS SHOWN BELOW.

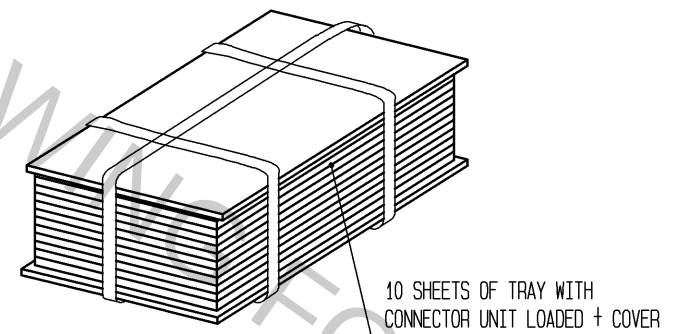

3. STORE 2 UNITS OF BANDED TRAY INTO A CARTON BOX(K-1)  
(STORE A BOUNDARY PLATE ON TOP OF THE SURFACE, THEN CLOSE THE BOX BY STICKING GUMMED TAPE IN FOUR PARTS)

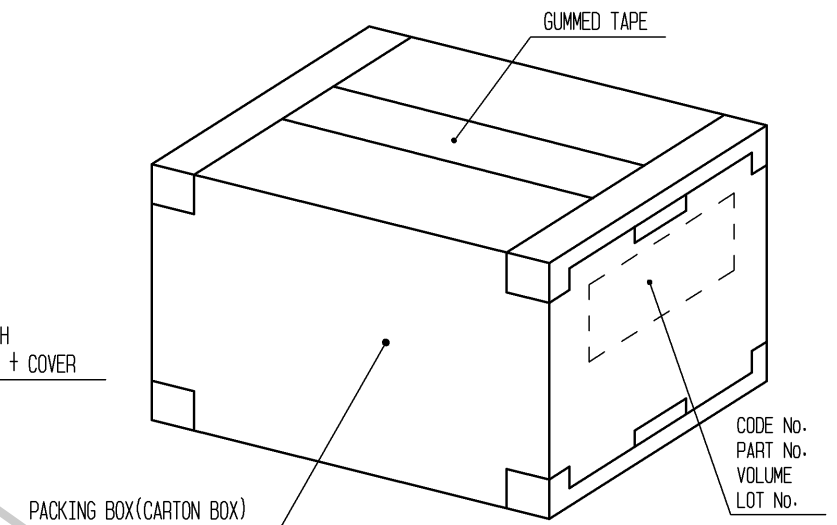

NOTES. 1 DIMENSIONS OF SMT RANGE AND CO-PLANARITY ARE AS SHOWN BEROW.



2 LOT No. SHALL BE INDICATED AT THE POSITION AS SHOWN.

3 THIS PRODUCT IS TRAY PACKING, AND 100 CONNECTORS FOR EACH TRAY.  
MINIMUM ORDER QUANTITY WILL BE 100 pcs PER UNIT.

4. THE SHADED AREAS  SHOW LOCATIONS OF EJECTOR PINS.

5 PLATING

CONTACT AREA : GOLD 0.75μm MIN.

READ AREA : GOLD 0.03μm MIN.

UNDER PLATING: NICKEL 2μm MIN.

**HRS**

|             |                 |
|-------------|-----------------|
| DRAWING NO. | EDC3-126145-00  |
| PART NO.    | ZX80-B-5SA      |
| CODE NO.    | CL242-0019-7-00 |

1/2