


# Energy Management Smart Modular Power Analyzer Type WM30 96

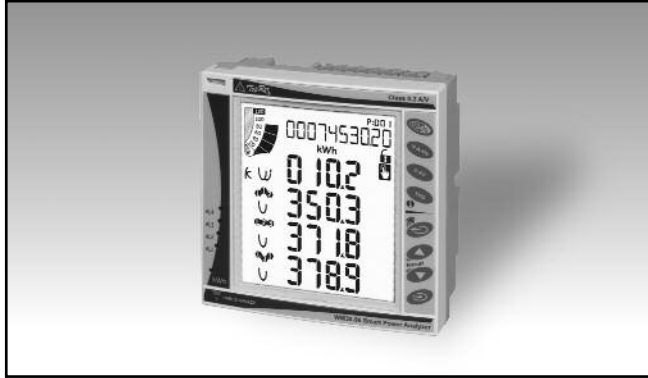

- One RS232 and RS485 port (on request)
- Communication protocol: MODBUS-RTU
- MODBUS TCP/IP Ethernet port (on request)
- BACnet-IP over Ethernet port (on request)
- BACnet MS/TP over RS485, BTL approved (on request)
- Ethernet/IP port, ODVA approved (on request)
- Up to 2 digital outputs (pulse, alarm, remote control) (on request)
- Up to 4 freely configurable virtual alarms
- Up to 2 analogue outputs (+20mA, +10VDC) (on request)


- Class 0.5 (kWh) according to EN62053-22
- Class C (kWh) according to EN50470-3
- Class 2 (kvarh) according to EN62053-23
- Accuracy  $\pm 0.2\%$  RDG (current/voltage)
- Instantaneous variables readout: 4x4 DGT
- Energies readout: 9+1 DGT
- System variables: VLL, VLN, A, VA, W, var, PF, Hz, Phase-sequence-asymmetry-loss.
- Single phase variables: VLL, VLN, AL, An (calculated), VA, W, var, PF
- Both system and single phase variables with average and max calculation
- Harmonic analysis (FFT) up to the 32nd harmonic (current and voltage)
- Energy measurements (imported/exported): total and partial kWh and kvarh
- Energy measurements according to ANSI C12.20 CA 0.5, ANSI C12.1 (revenue grade)
- Run hours counter (8+2 DGT)
- Real time clock function
- Application adaptable display and programming procedure (Easyprog function)
- Universal power supply: 24-48 VDC/AC, 100-240 VDC/AC
- Front dimensions: 96x96 mm
- Front protection degree: IP65, NEMA4X, NEMA12

## Product Description

Three-phase smart power analyzer with built-in advanced configuration system and LCD data displaying. Particularly recommended for the measurement of the main electrical variables. WM30 is based on a modular housing for panel mounting with IP65 (front) protection degree. Moreover, the analyzer can be provided with digital outputs that can be either for pulse proportional to the

active and reactive energy being measured or/and for alarm outputs. The instrument can be equipped with the following modules: RS485/RS232, Ethernet, BACnet-IP or BACnet MS/TP communication ports, pulse and alarm outputs. Parameters programming and data reading can be easily performed by means of WM3040Soft.

## How to order **WM30-96 AV5 3 H R2 A2 S1 XX**

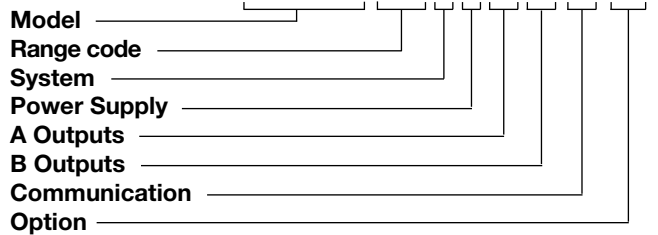

## Type Selection

Range codes	System	Power supply	A Outputs
<b>AV4:</b> 400/690V <sub>LL</sub> AC 1(2)A V <sub>LN</sub> : 160V to 480V <sub>LN</sub> V <sub>LL</sub> : 277V to 830V <sub>LL</sub>	<b>3:</b> balanced and unbalanced load: 3-phase, 4-wire; 3-phase, 3-wire; 2-phase, 3-wire; 1-phase, 2-wire	<b>H:</b> 100-240 +/-10% (90 to 255) VDC/AC (50/60 Hz)  <b>L:</b> 24-48 +/-15% (20 to 55) VDC/AC (50/60 Hz)	<b>XX:</b> none <b>O2:</b> Dual channel static output <b>R2:</b> Dual channel relay output
<b>AV5:</b> 400/690V <sub>LL</sub> AC 5(6)A V <sub>LN</sub> : 160V to 480V <sub>LN</sub> V <sub>LL</sub> : 277V to 830V <sub>LL</sub>			
<b>AV6:</b> 100/208V <sub>LL</sub> AC 5(6)A V <sub>LN</sub> : 40V to 144V <sub>LN</sub> V <sub>LL</sub> : 70V to 250V <sub>LL</sub>	<b>Options</b>  <b>XX:</b> none	<b>Communication</b>  <b>XX:</b> none <b>S1:</b> RS485/RS232 port <b>E2:</b> Ethernet / Internet port <b>B1:</b> BACnet (IP) over Ethernet <b>B3:</b> BACnet (MS/TP) over RS485 <b>E6:</b> Ethernet/IP port	<b>B Outputs</b>  <b>XX:</b> none <b>A2:</b> Dual channel 20mA DC output <b>V2:</b> Dual channel 10V DC output
<b>AV7:</b> 100/208V <sub>LL</sub> AC 1(2)A V <sub>LN</sub> : 40V to 144V <sub>LN</sub> V <sub>LL</sub> : 70V to 250V <sub>LL</sub>			


## Position of modules and combination

Ref	Description	Main features	Part number	Pos. A	Pos. B	Pos. C
1	WM30 base provided with display, power supply, measuring inputs	<ul style="list-style-type: none"> <li>Inputs/system: AV5.3</li> <li>Power supply: H</li> </ul>	WM30 AV5 3 H			
2		<ul style="list-style-type: none"> <li>Inputs/system: AV6.3</li> <li>Power supply: H</li> </ul>	WM30 AV6 3 H			
3		<ul style="list-style-type: none"> <li>Inputs/system: AV4.3</li> <li>Power supply: H</li> </ul>	WM30 AV4 3 H			
4		<ul style="list-style-type: none"> <li>Inputs/system: AV7.3</li> <li>Power supply: H</li> </ul>	WM30 AV7 3 H			
		<ul style="list-style-type: none"> <li>Inputs/system: AV5.3</li> <li>Power supply: L</li> </ul>	WM30 AV5 3 L			
		<ul style="list-style-type: none"> <li>Inputs/system: AV6.3</li> <li>Power supply: L</li> </ul>	WM30 AV6 3 L			
		<ul style="list-style-type: none"> <li>Inputs/system: AV4.3</li> <li>Power supply: L</li> </ul>	WM30 AV4 3 L			
		<ul style="list-style-type: none"> <li>Inputs/system: AV7.3</li> <li>Power supply: L</li> </ul>	WM30 AV7 3 L			
5	Dual relay output (SPDT)	<ul style="list-style-type: none"> <li>2-channel</li> <li>Alarm or/and pulse output</li> </ul>	M O R2	X		
6	Dual static output (AC/DC Opto-Mos)	<ul style="list-style-type: none"> <li>2-channel</li> <li>Alarm or/and pulse output</li> </ul>	M O O2	X		
7	Dual analogue output (+20mADC)	<ul style="list-style-type: none"> <li>2-channel</li> </ul>	M O A2		X	
8	Dual analogue output (+10VDC)	<ul style="list-style-type: none"> <li>2-channel</li> </ul>	M O V2		X	
9	RS485 / RS232 port module	<ul style="list-style-type: none"> <li>Max. 115.2 Kbps</li> </ul>	M C 485 232			X
10	Ethernet port module	<ul style="list-style-type: none"> <li>RJ45 10/100 BaseT</li> </ul>	M C ETH			X
11	BACnet-IP port module	<ul style="list-style-type: none"> <li>Based on Ethernet bus</li> </ul>	M C BAC IP			X
12	BACnet-MS/TP port module	<ul style="list-style-type: none"> <li>Over RS485</li> </ul>	M C BAC MS			X
13	Ethernet/IP	<ul style="list-style-type: none"> <li>Based on Ethernet</li> </ul>	M C E I			X

### NOTE:

The position of the modules shall respect the sequence A-B-C. Possible arrangements are M, M-A, M-B, M-C, M-A-B, M-A-C, M-B-C and M-A-B-C where "M" is the basic module.

**It is possible to use the WM30-96 without any additional module as a simple indicator.**



## Input specifications

<b>Rated inputs</b>	System type: 1, 2 or 3-phase Galvanic insulation by means of built-in CT's	<b>Energy additional errors</b>	According to EN62053-22, ANSI C12.20, Class B or C according to EN50470-3, EN62053-23, ANSI C12.1
Input type	AV5 and AV6: 5(6)A AV4 and AV7: 1(2)A	Influence quantities	
Current range (by CT)		<b>Total Harmonic Distortion (THD)</b>	±1% FS (FS: 100%) AV4: I <sub>min</sub> : 5mARMS; I <sub>max</sub> : 3A; U <sub>min</sub> : 30VRMS; U <sub>max</sub> : 679Vp AV5: I <sub>min</sub> : 5mARMS; I <sub>max</sub> : 15Ap; U <sub>min</sub> : 30VRMS; U <sub>max</sub> : 679Vp AV6: I <sub>min</sub> : 5mARMS; I <sub>max</sub> : 15Ap; U <sub>min</sub> : 30VRMS; U <sub>max</sub> : 204Vp AV7: I <sub>min</sub> : 5mARMS; I <sub>max</sub> : 3A; U <sub>min</sub> : 30VRMS; U <sub>max</sub> : 204Vp
Voltage (by direct connection or VT/PT)	AV4, AV5: 400/690VLL; AV6, AV7: 100/208VLL	<b>Temperature drift</b>	≤200ppm/°C
<b>Accuracy</b> (Display + RS485) (@25°C ±5°C, R.H. ≤60%, 48 to 62 Hz)	In: see below, Un: see below	<b>Sampling rate</b>	3200 samples/s @ 50Hz, 3840 samples/s @ 60Hz
AV4 model	In: 1A, I <sub>max</sub> : 2A; Un: 160 to 480VLN (277 to 830VLL)	<b>Measurements</b>	See "List of the variables that can be connected to:"
AV5 model	In: 5A, I <sub>max</sub> : 6A; Un: 160 to 480VLN (277 to 830VLL)	Method	TRMS measurements of distorted wave forms.
AV6 model	In: 5A, I <sub>max</sub> : 6A; Un: 40 to 144VLN (70 to 250VLL)	Coupling type	By means of CT's
AV7 model	In: 1A, I <sub>max</sub> : 2A; Un: 40 to 144VLN (70 to 250VLL)	<b>Crest factor</b>	AV5, AV6: ≤3 (15A max. peak) AV4, AV7: ≤3 (3A max. peak)
Current AV4, AV5, AV6, AV7 models	From 0.01In to 0.05In: ±(0.5% RDG +2DGT) From 0.05In to I <sub>max</sub> : ±(0.2% RDG +2DGT)	<b>Current Overloads</b>	Continuous (AV5 and AV6) 6A, @ 50Hz Continuous (AV4 and AV7) 2A, @ 50Hz For 500ms (AV5 and AV6) 120A, @ 50Hz For 500ms (AV4 and AV7) 40A, @ 50Hz
Phase-neutral voltage	In the range Un: ±(0,2% RDG +1DGT)	<b>Voltage Overloads</b>	Continuous 1.2 Un For 500ms 2 Un
Phase-phase voltage	In the range Un: ±(0.5% RDG +1DGT)	<b>Input impedance</b>	400VL-L (AV4 and AV5) > 1.6MΩ 208VL-L (AV6 and AV7) > 1.6MΩ 5(6)A (AV5 and AV6) < 0.2VA 1(2)A (AV4 and AV7) < 0.2VA
Frequency	±0.01Hz (45 to 65Hz)	<b>Frequency</b>	40 to 440 Hz
Active and Apparent power	from 0.01In to 0.05In, PF 1: ±(1%RDG+1DGT) From 0.05In to I <sub>max</sub> PF 0.5L, PF1, PF0.8C: ±(0.5%RDG+1DGT)		
Power Factor	±[0.001+0.5% (1.000 - "PF RDG")]		
Reactive power	From 0.02In to 0.05In, senφ 1: ±(1.5%RDG+1DGT) From 0.05In to I <sub>max</sub> , senφ 1: ±(1%RDG+1DGT) From 0.05In to 0.1In, senφ 0.5L/C: ±(1.5%RDG+1DGT) From 0.1In to I <sub>max</sub> , senφ 0.5L/C: ±(1%RDG+1DGT)		
Active energy	Class 0.5 according to EN62053-22, ANSI C12.20 Class C according to EN50470-3.		
Reactive energy	Class 2 according to EN62053-23, ANSI C12.1.		
Start up current AV5, AV6	5mA		
Start up current AV4, AV7	1mA		

## Output specifications

<b>Relay outputs (M O R2)</b>			
Physical outputs	2 (max. 1 module per instrument)		to 10.00 kWh/kvarh per pulse. The above listed variables can be connected to any output.
Purpose	For either alarm output or pulse output	Pulse duration	$\geq 100\text{ms} < 120\text{msec}$ (ON), $\geq 120\text{ms}$ (OFF), according to EN62052-31
Type	Relay, SPDT type AC 1-5A @ 250VAC; AC 15-1.5A @ 250VAC	Remote controlled outputs	The activation of the outputs is managed through the serial communication port
Configuration	By means of the front keypad		See "Insulation between inputs and outputs" table
Function	The outputs can work as alarm outputs but also as pulse outputs, remote controlled outputs, or in any other combination.	Insulation	
Alarms	Up alarm and down alarm linked to the virtual alarms, other details see Virtual alarms	<b>20mA analogue outputs (M O A2)</b>	
Min. response time	$\leq 200\text{ms}$ , filters excluded. Set-point on-time delay: "0 s".	Number of outputs	2 per module (max. 1 module per instrument)
Pulse		Accuracy	$\pm 0.2\%$ FS
Signal retransmission	Total: +kWh, -kWh, +kvarh, -kvarh. Partial: +kWh, -kWh, +kvarh, -kvarh.	Range	0 to 20mA
Pulse type	Programmable from 0.001 to 10.00 kWh/kvarh per pulse. The above listed variables can be connected to any output.	Configuration	By means of the front keypad
Pulse duration	$\geq 100\text{ms} < 120\text{msec}$ (ON), $\geq 120\text{ms}$ (OFF), according to EN62052-31	Signal retransmission	The signal output can be connected to any instantaneous variable available in the table "List of the variables that can be connected to".
Remote controlled outputs	The activation of the outputs is managed through the serial communication port	Scaling factor	Programmable within the whole range of retransmission.
Insulation	See "Insulation between inputs and outputs" table	Response time	$\leq 400\text{ms}$ typical (filter excluded)
		Ripple	$\leq 1\%$ (according to IEC 60688-1, EN 60688-1)
		Total temperature drift	$\leq 500\text{ppm}/^\circ\text{C}$
		Load	$\leq 600\Omega$
		Insulation	See "Insulation between inputs and outputs" table
<b>Static outputs (M O O2)</b>		<b>10VDC analogue outputs (M O V2)</b>	
Physical outputs	Opto-Mos type 2 (max. 1 module per instrument)	Number of outputs	2 (max. 1 module per instrument)
Purpose	For either pulse output or alarm output	Accuracy	$\pm 0.2\%$ FS
Signal	$V_{\text{ON}}$ : 2.5VAC/DC/max.100mA $V_{\text{OFF}}$ : 42VDC max.	Range	0 to 10 VDC
Configuration	By means of the front keypad	Configuration	By means of the front keypad
Function	The outputs can work as alarm outputs but also as pulse outputs, remote controlled outputs, or in any other combination.	Signal retransmission	The signal output can be connected to any instantaneous variable available in the table "List of the variables that can be connected to".
Alarms	Up alarm and down alarm linked to the virtual alarms, other details see Virtual alarms	Scaling factor	Programmable within the whole range of retransmission;
Min. response time	$\leq 200\text{ms}$ , filters excluded. Set-point on-time delay: "0 s".	Response time	$\leq 400\text{ms}$ typical (filter excluded)
Pulse		Ripple	$\leq 1\%$ (according to IEC 60688, EN 60688)
Signal retransmission	Total: +kWh, -kWh, +kvarh, -kvarh. Partial: +kWh, -kWh, +kvarh, -kvarh.	Total temperature drift	$\leq 350\text{ppm}/^\circ\text{C}$
Pulse type	Programmable from 0.001	Load	$\geq 10\text{k}\Omega$
		Insulation	See "Insulation between inputs and outputs" table



## Output specifications (cont.)

<p><b>RS485 (on request)</b> Type</p> <p>Connections</p> <p>Addresses</p> <p>Protocol Data (bidirectional) Dynamic (reading only)</p> <p>Static (reading and writing only)</p> <p>Data format</p> <p>Baud-rate</p> <p>Driver input capability</p> <p>Note</p> <p>Insulation</p>	<p>Multidrop, bidirectional (static and dynamic variables) 2-wire Max. distance 1000m, termination directly on the module 247, selectable by means of the front key-pad MODBUS/JBUS (RTU)</p> <p>System and phase variables: see table "List of variables..." All the configuration parameters. 1 start bit, 8 data bit, no/even/odd parity, 1 stop bit Selectable: 9.6k, 19.2k, 38.4k, 115.2k bit/s 1/5 unit load. Maximum 160 transceivers on the same bus. With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed. See "Insulation between inputs and outputs" table</p>	<p><b>Ethernet/Internet port (on request)</b> Protocols IP configuration</p> <p>Port Client connections Connections</p> <p>Data (bidirectional) Dynamic (reading only)</p> <p>Static (reading and writing only)</p> <p>Note</p> <p>Insulation</p>	<p>Modbus TCP/IP Static IP / Netmask / Default gateway Selectable (default 502) Max 5 simultaneously RJ45 10/100 BaseTX Max. distance 100m</p> <p>System and phase variables: see table "List of variables..."</p> <p>All the configuration parameters. With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed. See "Insulation between inputs and outputs" table</p>
<p><b>RS232 port (on request)</b> Type</p> <p>Connections</p> <p>Protocol Data (bidirectional) Dynamic (reading only)</p> <p>Static (reading and writing only)</p> <p>Data format</p> <p>Baud-rate</p> <p>Note</p> <p>Insulation</p>	<p>Bidirectional (static and dynamic variables) 3 wires. Max. distance 15m MODBUS RTU /JBUS</p> <p>System and phase variables: see table "List of variables..." All the configuration parameters 1 start bit, 8 data bit, no/even/odd parity, 1 stop bit Selectable: 9.6k, 19.2k, 38.4k, 115.2k bit/s With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed. See "Insulation between inputs and outputs" table</p>	<p><b>BACnet-IP (on request)</b> Protocols IP configuration</p> <p>Port Device object instance</p> <p>Supported services</p> <p>Supported objects</p> <p>IP configuration</p> <p>Modbus TCP/IP</p> <p>Client connections Connections</p>	<p>BACnet-IP (for measurement reading purpose and to write object description) and Modbus TCP/IP (for measurement reading purpose and for programming parameter purpose)</p> <p>Static IP / Netmask /Default gateway Fixed: BAC0h 0 to 9999 selectable by key-pad 0 to 2<sup>22</sup>-2 = 4.194.302, selectable by programming software or by BACnet. "I have", "I am", "Who has", "Who is", "Read (multiple) Property" Type 2 (analogue value, including COV property), Type 5 (binary-value for up to 16 virtual alarm re-transmission) Type 8 (device) Static IP / Netmask / Default gateway See "Ethernet/Internet port" above Modbus only: max 5 simultaneously RJ45 10/100 BaseTX Max. distance 100m</p>



## Output specifications (cont.)

Data Dynamic (reading only)	System and phase variables (BACnet-IP and Modbus); see table "List of variables"	Connections	simultaneously RJ45 10/100 BaseTX Max. distance 100m
Static (reading and writing only)	All the configuration parameters (Modbus only)	Data Dynamic (reading only)	System and phase variables: see table "List of variables..."
Note	With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed.	Static (reading and writing only)	All the configuration parameters (Modbus only). With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed.
Insulation	See "Insulation between inputs and outputs" table	Note	See "Insulation between inputs and outputs" table
<b>BACnet MS/TP (on request)</b>		Insulation	BTL
Available ports	2: RS485 and Ethernet	Approval	
RS485 port		<b>Ethernet/IP (on request)</b>	
Type	Multidrop, mono-directional (dynamic variables)	Protocols	Ethernet/IP (for measurement reading purpose) and Modbus TCP/IP (for programming parameter purpose)
Connections	2-wire Max. distance 1000m, termination directly on the module	IP configuration	Static IP / Netmask / Default gateway
Device object instance	0 to 9999 selectable by key-pad	Modbus Port	Selectable (default 502)
Protocol	0 to 2 <sup>22</sup> -2 = 4.194.302, selectable by programming software or by BACnet.		Modbus only: max 5 simultaneously RJ45 10/100 Base TX
Supported services	BACnet MS/TP (for measurement reading purpose and to write object description)	Ethernet/IP port	Max distance 100m
Supported objects	"I have", "I am", "Who has", "Who is", "Read (multiple) Property"	Topology	Star
Data (mono-directional)	Type 2 (analogue value, including COV property), Type 5 (binary-value for up to 16 virtual alarm re-transmission)	Level	RJ45 standard
Dynamic	Type 8 (device)	Connection	Max distance 100m
Static	System and phase variables: see table "List of variables..."	Messaging	Commercial level
Data format	Not available	Supported features	Connection establishment: target
Baud-rate	1 start bit, 8 data bit, no parity, 1 stop bit		Class 1 and class 3 messaging
Driver input capability	Selectable: 9.6k, 19.2k, 38.4k or 76.8k kbit/s		ACD (Address Conflict Detection)
MAC addresses	1/5 unit load. Maximum 160 transceivers on the same bus.		UCMM
Ethernet port	Selectable: 0 to 127		List service 0x0004
Protocol	Modbus TCP/IP (for programming parameter purpose)	Data	List identity 0x0063
IP configuration	Static IP / Netmask / Default gateway	Dynamic (reading only)	Register session 0x0065
Modbus Port	Selectable (default 502)	Static (reading and writing only)	Unregister session 0x0066
Client connections	Modbus only: max 5	Insulation	Send RR data 0x006F
		Approval	Send Unit Data 0x0070
			System and phase variables (Ethernet/IP): see Ethernet/IP protocol document
			All the configuration parameters (Modbus TCP only)
			See "Insulation between inputs and outputs" table
			Ethernet IP conformance tested (ODVA)



## Energy meters

<b>Meters</b>			
Total	4 (9+1 digit)		Min. -9,999,999,999 kWh/kvarh
Partial	4 (9+1 digit)		Max. 9,999,999,999 kWh/kvarh.
<b>Pulse output</b>	Connectable to total and/or partial meters		
<b>Energy meter recording</b>	Storage of total and partial energy meters. Energy meter storage format (EEPROM)	<b>Type</b>	
		Total energy meters	+kWh, +kvarh, -kWh, -kvarh
		Partial energy meters	+kWh, +kvarh, -kWh, -kvarh

## Harmonic distortion analysis

<b>Analysis principle</b>	FFT		
<b>Harmonic measurement</b>		<b>System</b>	
Current	Up to the 32nd harmonic		The same for the other phases: L2, L3. The harmonic distortion can be measured in 3-wire or 4-wire systems. Tw: 0.02 sec@50Hz without filter
Voltage	Up to the 32nd harmonic		
<b>Type of harmonics</b>	THD (VL1 and VL1-N) The same for the other phases: L2, L3. THD (AL1)		

## Display, LED's and commands

<b>Display refresh time</b>	≤ 250 ms	<b>Energy consumption</b>	Red LED (only kWh) 0.001 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≤7
<b>Display</b>	4 lines, 4-DGT, 1 lines, 10-DGT	kWh pulsating	0.01 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≥7.1 ≤70.0
Type	LCD, single colour backlight		0.1 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≥70.1 ≤700.0
Digit dimensions	4-DGT: h 9.5mm; 10-DGT: h 6.0mm		1 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≥700.1 ≤7000
Instantaneous variables read-out	4-DGT		10 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≥7001 ≤70.00k
Energies variables read-out	Imported Total/Partial: 8+2DGT, 9+1DGT or 10DGT; Exported Total/Partial: 8+2DGT, 9+1DGT or 10DGT (with “-“ sign).		100 kWh/kvarh by pulse if the Ct ratio by VT ratio is >70.01k Max frequency: 16Hz, according to EN50470-1
Run Hours counter	8+2 DGT (99.999.999 hours and 59 minutes max)	<b>Back position LEDs</b>	
Overload status	EEEE indication when the value being measured is exceeding the “Continuous inputs overload” (maximum measurement capacity)	On the base	Green as power-on
Max. and Min. indication	Max. instantaneous variables: 9999; energies: 9 999 999 999. Min. instantaneous variables: 0.000; energies 0.0	On the communication modules	Two LEDs: one for TX (green) and one for RX (amber).
<b>Front position LEDs</b>		<b>Key-pad</b>	
Virtual alarms	4 red LED available in case of virtual alarm (AL1-AL2-AL3-AL4). Note: the real alarm is just the activation of the proper static or relay output if the proper module is available.		For variable selection, programming of the instrument working parameters, “dmd”, “max”, total energy and partial energy Reset

## Main functions

<b>Password</b>	Numeric code of max. 4 digits; 2 protection levels of the programming data: Password "0", no protection;		
1st level	Password from 1 to 9999, all data are protected		
2nd level			
<b>System selection</b>			(always on) to 255 minutes
System 3-Ph.n unbalanced load	3-phase (4-wire)	<b>Virtual alarms</b>	
System 3-Ph. unbalanced load	3-phase (3-wire), three currents and 3-phase to phase voltage measurements, or in case of Aaron connection two currents (with special wiring on screw terminals) and 3-phase to phase voltage measurements.	Working condition	In case of basic unit or with the addition of M O R2 or M O O2 digital output modules.
		No. of alarms	Up to 4
		Working mode	Up alarm and down alarm. The alarms can be connected to any instantaneous variable available in the table "List of the variables that can be connected to".
		Controlled variables	From 0 to 100% of the display scale
			From 0 to 100% of the display scale
		Set-point adjustment	0 to 255s
		Hysteresis	≤ 200ms, filters excluded.
		On-time delay	Set-point on-time delay: "0 s".
		Min. response time	
		<b>Reset</b>	By means of the front keypad. It is possible to reset the following data:
			- all the max and dmd values.
			- total energies: kWh, kvarh;
			- partial energies: kWh, kvarh
		<b>Harmonic analysis</b>	Up to the 32 <sup>nd</sup> harmonics on current and voltage
		<b>Clock</b>	
		Functions	Universal clock and calendar.
		Time format	Hour: minutes: seconds with selectable 24 hours or 12H AM/PM format.
		Date format	Day-month-year with selectable DD-MM-YY or MM-DD-YY format.
		Battery life	10 years
		<b>Easy programming function</b>	For all the display selections, both energy and power measurements are independent from the current direction. The displayed energy is always "imported" with the only exception of "C", "D", "E" and "G" types (see "display pages" table). For those latter selections the energies can be either "imported" or "exported" depending on the current direction.
<b>Transformer ratio</b>			
VT (PT)	1.0 to 999.9 / 1000 to 9999.		
CT	1.0 to 999.9 / 1000 to 9999 (up to 10kA in case of CT with 1A secondary current and up to 50kA in case of CT with 5A secondary current).		
<b>Filter</b>			
Operating range	Selectable from 0 to 100% of the input display scale		
Filtering coefficient	Selectable from 1 to 32		
Filter action	Measurements, analogue signal retransmission, serial communication (fundamental variables: V, A, W and their derived ones).		
<b>Displaying</b>			
Number of variables	Up to 5 variables per page. See "Front view". 7 different set of variables available (see "Display pages") according to the application being selected. One page is freely programmable as combination of variables.		
Backlight	The backlight time is programmable from 0		



## General specifications

<b>Operating temperature</b>	-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23	<b>Standard compliance</b>	
<b>Storage temperature</b>	-30°C to +70°C (-22°F to 158°F) (R.H. < 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23	Safety	IEC60664, IEC61010-1 EN60664, EN61010-1 EN62052-11.
<b>Installation category</b>	Cat. III (IEC60664, EN60664)	Metrology	EN62053-22, EN62053-23, EN50470-3.
<b>Insulation (for 1 minute)</b>	See "Insulation between inputs and outputs" table	Pulse output	DIN43864, IEC62053-31
<b>Dielectric strength</b>	4kVAC RMS for 1 minute	<b>Approvals</b>	Eligible System performance Meter for Go Solar California, CE, cULus "Listed"
<b>Noise rejection CMRR</b>	100 dB, 48 to 62 Hz	<b>Connections</b>	Screw-type max. 2.5 mm <sup>2</sup> . min./max. screws tightening torque: 0.4 Nm / 0.8 Nm. Suggested screws tightening torque: 0.5 Nm
<b>EMC</b>	According to EN62052-11	<b>Housing DIN</b>	
Electrostatic discharges	15kV air discharge	Dimensions (WxHxD)	Module holder: 96x96x50mm. "A" and "B" type modules: 89.5x63x16mm. "C" type module: 89.5x63x20mm.
Immunity to irradiated	Test with current: 10V/m from 80 to 2000MHz	Max. depth behind the panel	With 3 modules (A+B+C): 81.7 mm
Electromagnetic fields	Test without any current: 30V/m from 80 to 2000MHz	Material	ABS/Nylon PA66, self- extinguishing: UL 94 V-0
Burst	On current and voltage measuring inputs circuit: 4kV	Mounting	Panel mounting
Immunity to conducted disturbances	10V/m from 150KHz to 80MHz	<b>Protection degree</b>	
Surge	On current and voltage measuring inputs circuit: 4kV; on "L" auxiliary power supply input: 1kV	Front	IP65, NEMA4x, NEMA12
Radio frequency suppression	According to CISPR 22	Screw terminals	IP20
		<b>Weight</b>	Approx. 420 g (packing included)

## Insulation between inputs and outputs

	Power Supply (H o L)	Mesuring inputs	Relè output (MOR2)	Static ouput (MOO2)	Serial port	Ethernet port	Analogue outputs
Power Supply (H o L)	-	4kV	4kV	4kV	4kV	4kV	4kV
Mesuring inputs	4kV	-	4kV	4kV	4kV	4kV	4kV
Relè output (MOR2)	4kV	4kV	2kV	-	4kV	4kV	4kV
Static ouput (MOO2)	4kV	4kV	-	2kV	4kV	4kV	4kV
Serial port	4kV	4kV	4kV	4kV	-	-	4kV
Ethernet port	4kV	4kV	4kV	4kV	-	-	4kV
Analogue outputs	4kV	4kV	4kV	4kV	4kV	4kV	4kV <sup>(1)</sup>

(1): respect another module 4kV, in the same module 0kV.

-: combination not allowed.

**NOTE:** all the models have, mandatory, to be connected to external current transformers because the isolation among the current inputs is just functional (100VAC).

## List of the variables that can be connected to:

- Communication port (all listed variables)
- Analogue outputs (all variables with the only exclusion of “energies” and “run hour counter”)
- Pulse outputs (only “energies”)
- Alarm outputs (“energies”, “hour counter” and “max” excluded)

No	Variable	1-ph. sys	2-ph. sys	3-ph. 3/4-wire balanced sys	3-ph. 2-wire balanced sys	3-ph. 3-wire unbal. sys	3-ph. 4-wire unbal. sys	Notes
1	VL-N sys	O	X	X	X	#	X	sys= system= $\Sigma$
2	VL1	X	X	X	X	#	X	
3	VL2	O	X	X	X	#	X	
4	VL3	O	O	X	X	#	X	
5	VL-L sys	O	#	X	X	X	X	sys= system= $\Sigma$
6	VL1-2	#	X	X	X	X	X	
7	VL2-3	#	O	X	X	X	X	
8	VL3-1	#	O	X	X	X	X	
9	Asys	O	X	O	O	X	X	
10	An	#	X	O	O	O	X	
11	AL1	X	X	X	X	X	X	
12	AL2	O	X	X	X	X	X	
13	AL3	O	O	X	X	X	X	
14	VA sys	X	X	X	X	X	X	sys= system= $\Sigma$
15	VA L1	X	X	X	X	#	X	
16	VA L2	O	X	X	X	#	X	
17	VA L3	O	O	X	X	#	X	
18	var sys	X	X	X	X	X	X	sys= system= $\Sigma$
19	var L1	X	X	X	X	#	X	
20	var L2	O	X	X	X	#	X	
21	var L3	O	O	X	X	#	X	
22	W sys	X	X	X	X	X	X	sys= system= $\Sigma$
23	WL1	X	X	X	X	#	X	
24	WL2	O	X	X	X	#	X	
25	WL3	O	O	X	X	#	X	
26	PF sys	X	X	X	X	X	X	sys= system= $\Sigma$
27	PF L1	X	X	X	X	#	X	
28	PF L2	O	X	X	X	#	X	
29	PF L3	O	O	X	X	#	X	
30	Hz	X	X	X	X	X	X	
31	Phase seq.	O	X	X	X	X	X	
32	Asy VLL	O	O	X	X	X	X	Asymmetry
33	Asy VLN	O	X	#	O	#	X	Asymmetry
34	Run Hours	X	X	X	X	X	X	
35	kWh (+)	X	X	X	X	X	X	Total
36	kvarh (+)	X	X	X	X	X	X	Total
37	kWh (+)	X	X	X	X	X	X	Partial
38	kvarh (+)	X	X	X	X	X	X	Partial
39	kWh (-)	X	X	X	X	X	X	Total
40	kvarh (-)	X	X	X	X	X	X	Total
41	kWh (-)	X	X	X	X	X	X	Partial
42	kvarh (-)	X	X	X	X	X	X	Partial
43	A L1 THD	X	X	X	X	X	X	
44	A L2 THD	O	X	X	X	X	X	
45	A L3 THD	O	O	X	X	X	X	
46	V L1 THD	X	X	X	X	O	X	
47	V L2 THD	O	X	X	X	O	X	
48	V L3 THD	O	O	X	X	O	X	
49	V L1-2 THD	X	X	X	X	X	X	
50	V L2-3 THD	O	X	X	X	X	X	
51	V L3-1 THD	O	O	X	X	X	X	

(X) = available; (O) = not available (variable not available on the display); (#) Not available (the relevant page is not displayed)

## Power supply specifications

Auxiliary power supply

H: 100-240 +/-10% (90 to 255) VDC/AC (50/60 Hz);  
L: 24-48 +/-15% (20 to 55) VDC/AC (50/60 Hz)

Power consumption

AC: 20 VA;  
DC: 10 W

## List of selectable applications

	Description	Notes
<b>A</b>	Cost allocation	Imported energy metering
<b>B</b>	Cost control	Imported and partial energy metering
<b>C</b>	Complex cost allocation	Imported/exported energy (total and partial)
<b>D</b>	Solar	Imported and exported energy metering with some basic power analyzer function
<b>E</b>	Complex cost and power analysis	Imported/exported energy (total and partial) and power analysis
<b>F</b>	Cost and power quality analysis	Imported energy and power quality analysis
<b>G</b>	Advanced energy and power analysis for power generation	Complete energy metering and power quality analysis

## Display pages

Var Type	No	Line 1 Variable Type	Line 2 Variable Type	Line 3 Variable Type	Line 4 Variable Type	Line 5 Variable Type	Note	Applications							
								A	B	C	D	E	F	G	
	0	Home page	Programmable					x	x	x	x	x	x	x	x
a	1	Total kWh (+)	b, c, d	b, c, d	b, c, d	b, c, d		x	x	x	x	x	x	x	
a	2	Total kvarh (+)	b, c, d	b, c, d	b, c, d	b, c, d		x	x	x	x	x	x	x	
a	3	Total kWh (-)	b, c, d	b, c, d	b, c, d	b, c, d				x	x	x		x	
a	4	Total kvarh (-)	b, c, d	b, c, d	b, c, d	b, c, d				x	x	x		x	
a	5	kWh (+) partial	b, c, d	b, c, d	b, c, d	b, c, d			x	x		x	x	x	
a	6	kvarh (+) part.	b, c, d	b, c, d	b, c, d	b, c, d			x	x		x	x	x	
a	7	kWh (-) partial	b, c, d	b, c, d	b, c, d	b, c, d				x		x		x	
a	8	kvarh (-) part.	b, c, d	b, c, d	b, c, d	b, c, d				x		x		x	
a	9	Run Hours (99999999.99)	b, c, d	b, c, d	b, c, d	b, c, d				x	x	x	x	x	
b	10	a/Phase seq.	VLN $\Sigma$	VL1	VL2	VL3	(1) (2)				x	x	x	x	
b	11	a/Phase seq.	VLN $\Sigma$	VL1-2	VL2-3	VL3-1	(1) (2)				x	x	x	x	
b	12	a/Phase seq.	An	AL1	AL2	AL3	(1) (2)				x	x	x	x	
b	13	a/Phase seq.	Hz	"ASY"	VLL sys (% asy)	VLL sys (% asy)	(1) (2)				x	x	x	x	
b	14	a/Phase seq.	A $\Sigma$	AL1	AL2	AL3	(1) (2)				x	x	x	x	
c	15	a/Phase seq.	W $\Sigma$	WL1	WL2	WL3	(1) (2)				x	x	x	x	
c	16	a/Phase seq.	var $\Sigma$	var L1	var L2	var L3	(1) (2)					x	x	x	
c	17	a/Phase seq.	PF $\Sigma$	PF L1	PF L2	PF L3	(1) (2)					x	x	x	
c	18	a/Phase seq.	VA $\Sigma$	VA L1	VA L2	VA L3	(1) (2)					x	x	x	
d	19	a/Phase seq.		THD V1	THD V2	THD V3	(1) (2)							x	x
d	20	a/Phase seq.		THD V12	THD V23	THD V31	(1) (2)							x	x
d	21	a/Phase seq.		THD A1	THD A2	THD A3	(1) (2)							x	x

Note: the table refers to system 3P.n.


(1) Also maximum value storage (no EEPROM storage).

(2) Also average (dmd) value (no EEPROM storage).

## Additional available information on the display


No	Line 1	Line 2	Line 3	Line 4	Line 5	Note	Applications						
							A	B	C	D	E	F	G
1	Lot n. (text) xxxx	Yr. (text) xx	SYS (text)	x (1/2/3)	1...60 (min) "dmd"		x	x	x	x	x	x	x
2	Conn. xxx.x (3ph.n/3ph/3ph./ 3ph.2/1ph/2ph)	CT.rA (text)	1.0 ... 99.99k	PT.rA (text)	1.0...9999		x	x	x	x	x	x	x
3	LED PULSE (text) kWh	xxxx kWh per pulse					x	x	x	x	x	x	x
4	PULSE out1 (text) kWh/kvarh	xxxx kWh/kvarh per pulse	+/- tot/PAr				x	x	x	x	x	x	x
5	PULSE out2 (text) kWh/kvarh	xxxx kWh/kvarh per pulse	+/- tot/PAr				x	x	x	x	x	x	x
6	Remote out	out1 (text)	on/oFF	Out2 (text)	on/oFF		x	x	x	x	x	x	x
7	Alarm 1 nE/nd	None / out 1 / out 2	Set 1	Set 2	(measurement)					x	x	x	x
8	Alarm 2 nE/nd	None / out 1 / out 2	Set 1	Set 2	(measurement)					x	x	x	x
9	Alarm 3 nE/nd	None / out 1 / out 2	Set 1	Set 2	(measurement)					x	x	x	x
10	Alarm 4 nE/nd	None / out 1 / out 2	Set 1	Set 2	(measurement)					x	x	x	x
11	Analogue 1	Hi:E	0.0 ... 9999	Hi.A	0.0 ... 100.0%					x	x	x	x
12	Analogue 2	Hi:E	0.0 ... 9999	Hi.A	0.0 ... 100.0%					x	x	x	x
13	COM port	None / out 1 / out 2	xxx (address)	bdr (text)	9.6/19.2/ 38.4/115.2		x	x	x	x	x	x	x
14	IP address	XXX	XXX	XXX	XXX		x	x	x	x	x	x	x

## Back protection rotary switch


	Function	Rotary switch position	Description
	Unlok	1	All programming parameters are freely modifiable by means of the front key-pad and by means of the communication port.
	Lock	7	The key-pad, as far as programming is concerned and the data through the serial communication cannot be changed (no writing into meter allowed). Data reading is allowed.

## Accuracy (According to EN50470-3 and EN62053-23)

**kWh, accuracy (RDG) depending on the current**

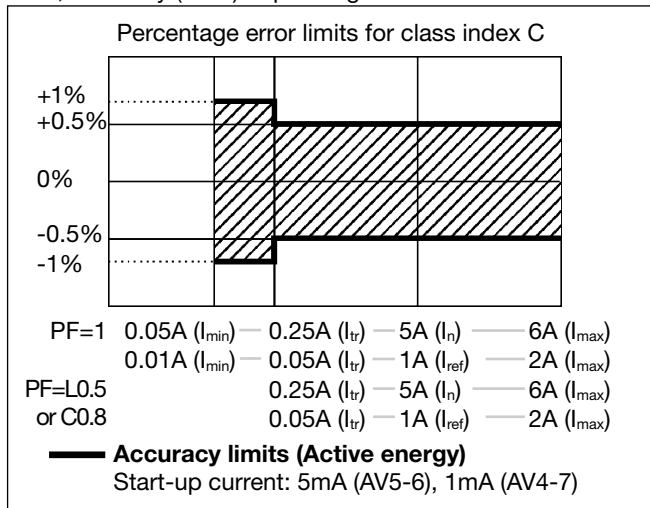

**kvarh, accuracy (RDG) depending on the current**

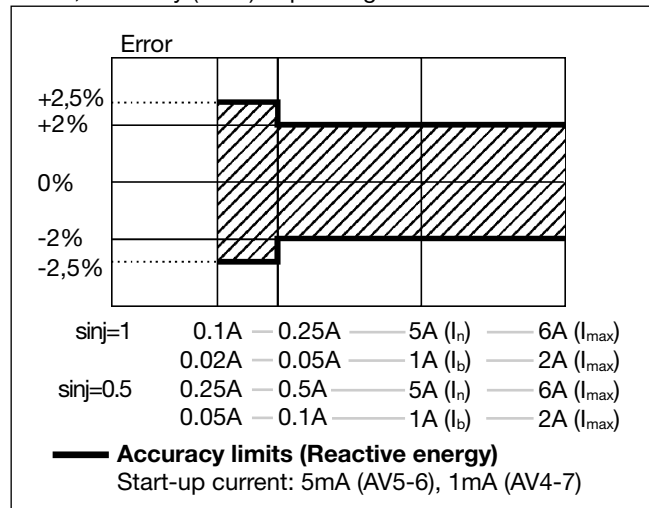

## WM3040Soft parameter progr. and var. reading software

**WM3040Soft**

Multi-language software (Italian, English, French, German, Spanish) for variable reading, instrument calibration and parameters programming. The program runs under Windows XP/Vista/7

**Working mode**

Three different working modes can be selected:  
 - management of local RS232 (MODBUS);  
 - management of a local RS485 network (MODBUS);  
 - managed via TCP port

## Used calculation formulas

**Phase variables**

Instantaneous effective voltage

$$V_{1N} = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i \cdot (A_1)_i$$

Instantaneous power factor

$$\cos\varphi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (A_1)_i^2}$$

Instantaneous apparent power

$$VA_1 = V_{1N} \cdot A_1$$

Instantaneous reactive power

$$\text{var}_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

**System variables**

Equivalent three-phase voltage

$$V_{\Sigma} = \frac{V_1 + V_2 + V_3}{3} \cdot \sqrt{3}$$

Voltage asymmetry

$$ASY_{LL} = \frac{(V_{LLmax} - V_{LLmin})}{V_{LL\Sigma}}$$

$$ASY_{LN} = \frac{(V_{LNmax} - V_{LNmin})}{V_{LN\Sigma}}$$

Three-phase reactive power

$$\text{var}_{\Sigma} = (\text{var}_1 + \text{var}_2 + \text{var}_3)$$

Three-phase active power

$$W_{\Sigma} = W_1 + W_2 + W_3$$

Three-phase apparent power

$$VA_{\Sigma} = \sqrt{W_{\Sigma}^2 + \text{var}_{\Sigma}^2}$$

Total harmonic distortion

$$THD_N = 100 \cdot \frac{\sqrt{\sum_{n=2}^N |X_n|^2}}{|X_1|}$$

Three-phase power factor

$$\cos\varphi_{\Sigma} = \frac{W_{\Sigma}}{VA_{\Sigma}} \quad (\text{TPF})$$

**Energy metering**

$$k \text{ var hi} = \int_{t_1}^{t_2} Qi(t) dt \cong \Delta t \sum_{n1}^{n2} Qnj$$




$$kWhi = \int_{t_1}^{t_2} Pi(t) dt \cong \Delta t \sum_{n1}^{n2} Pnj$$

Where:



i= considered phase (L1, L2 or L3)  
**P**= active power; **Q**= reactive power;  
**t<sub>1</sub>**, **t<sub>2</sub>** =starting and ending time points of consumption recording; **n**= time unit **Δ**; **t**= time interval between two successive power consumptions;  
**n<sub>1</sub>**, **n<sub>2</sub>** = starting and ending discrete time points of consumption recording

# Wiring diagrams


## System type selection: 3-Ph.2

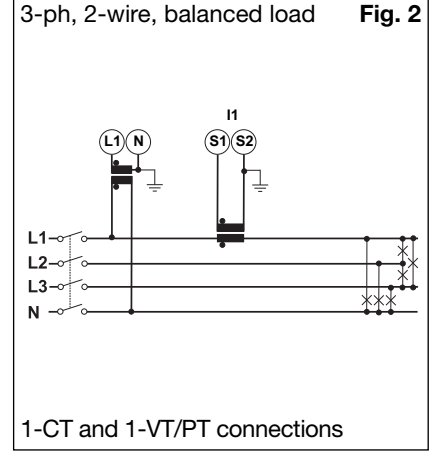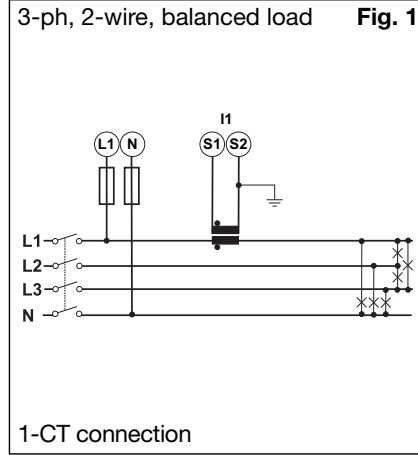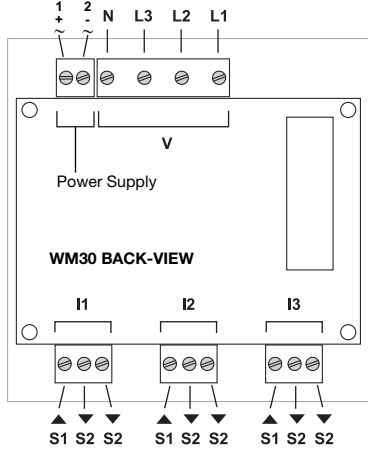




## System type selection: 3-Ph.n

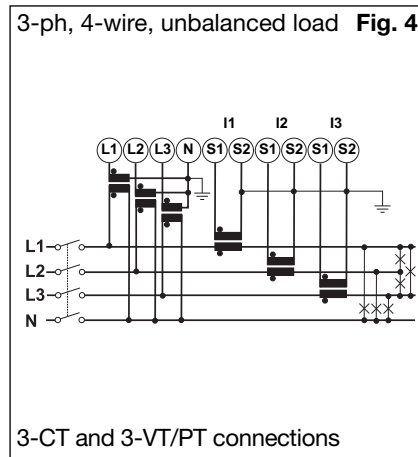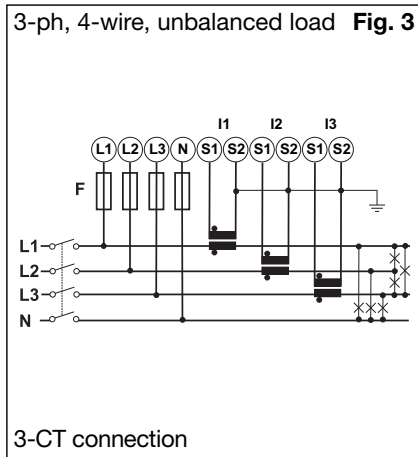

## System type selection: 3-Ph


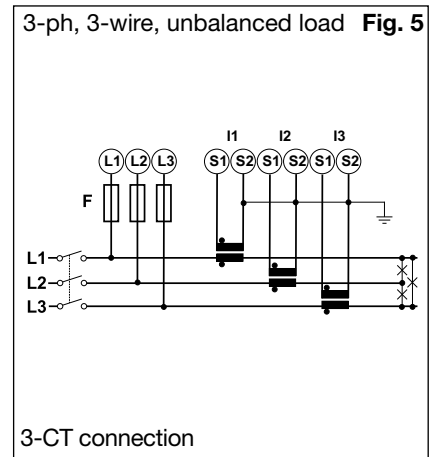


## System type selection: 3-Ph (cont.)

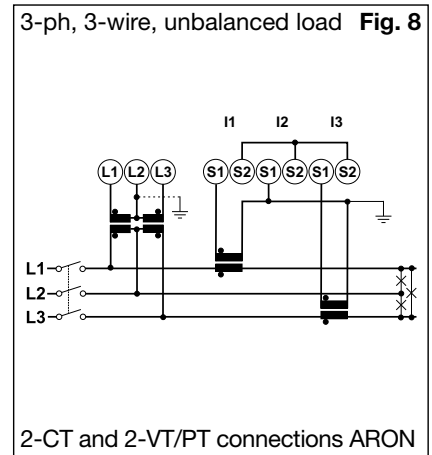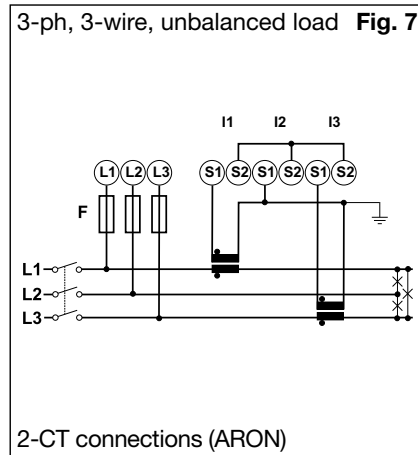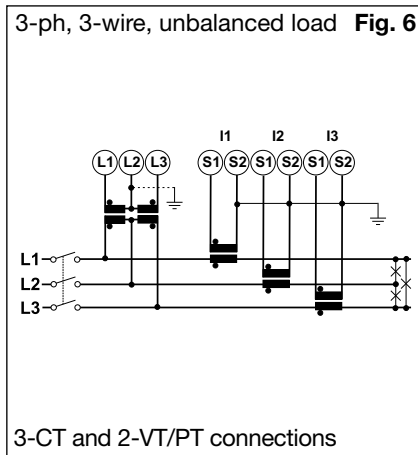


## Wiring diagrams


### System type selection: 3-Ph.1

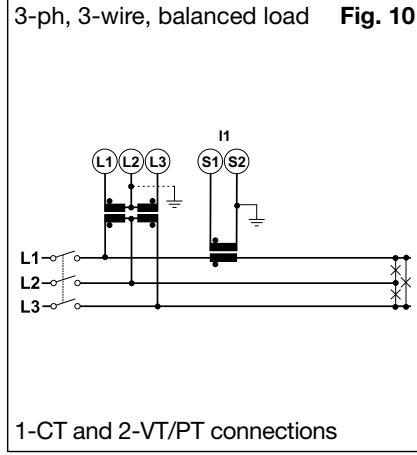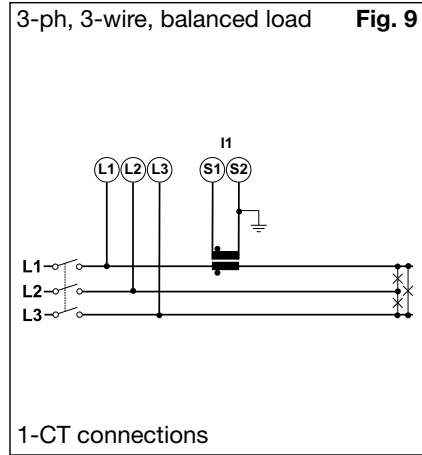



### System type selection: 2-Ph

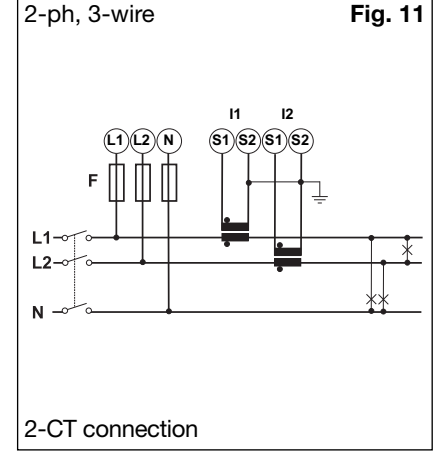



### System type selection: 2-Ph (cont.)

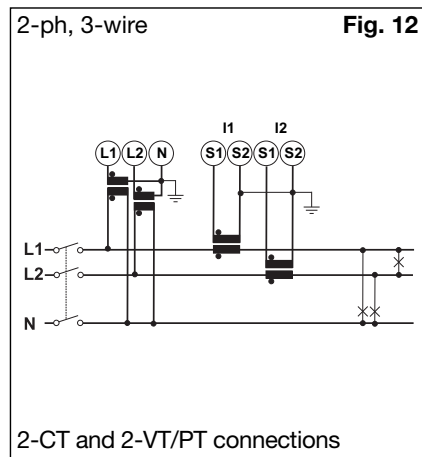







### System type selection: 1-Ph

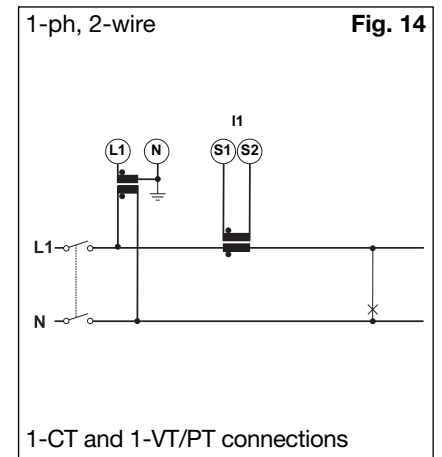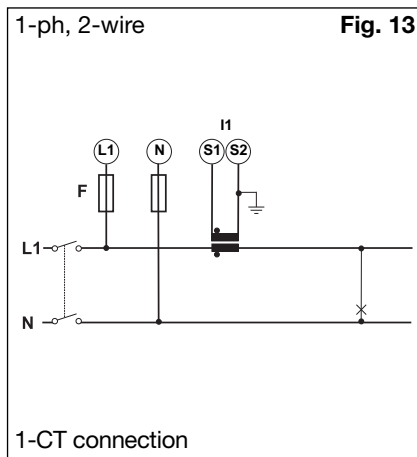




### Power Supply

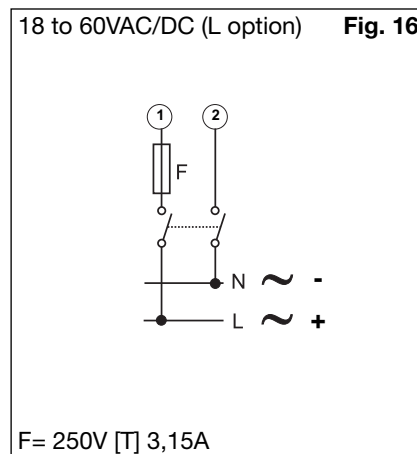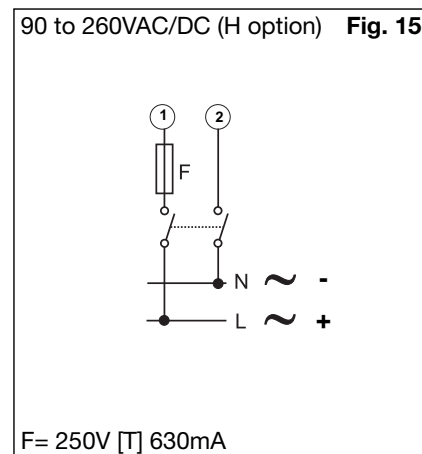

## Static, relay and analogue outputs wiring diagrams

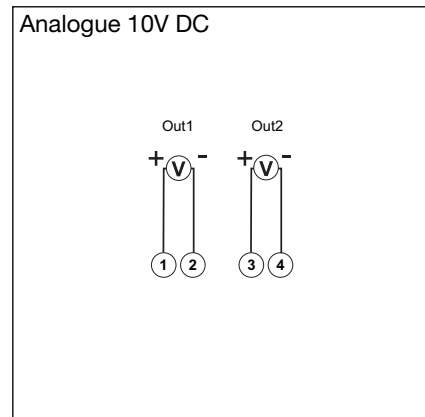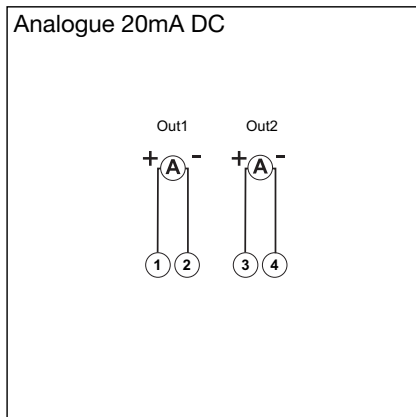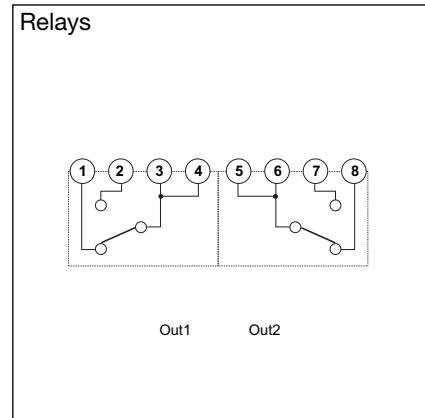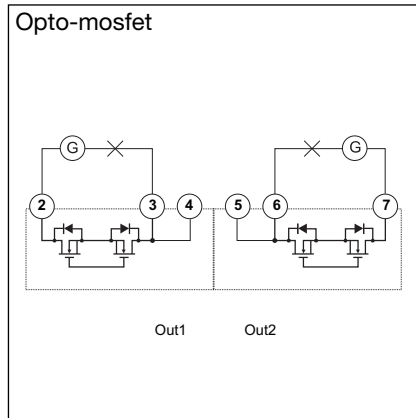



## RS485 and RS232 wiring diagrams

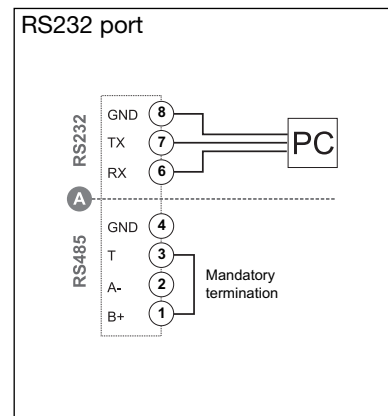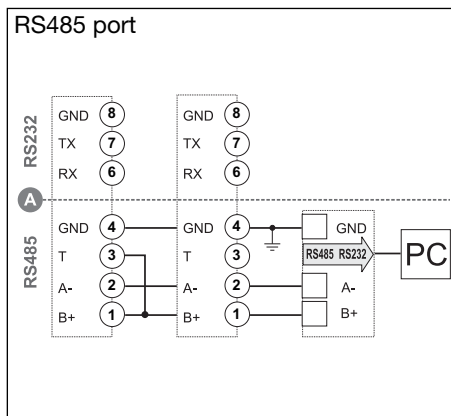

**NOTE.** RS485: additional devices provided with RS485 are connected in parallel. The termination of the serial output is carried out only on the last instrument of the network, by means of a jumper between (B+) and (T). **A**: the communication RS232 and RS485 ports **can't be** connected and used simultaneously.




## RS485 wiring diagram of Bacnet module

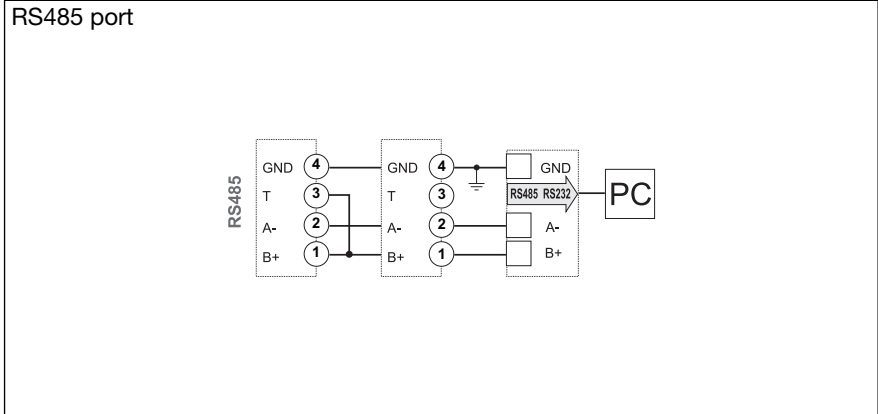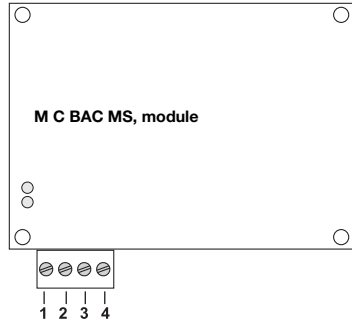

**NOTE.** RS485: additional devices provided with RS485 are connected in parallel. The termination of the serial output is carried out only on the last instrument of the network, by means of a jumper between (B+) and (T).

## Front panel description

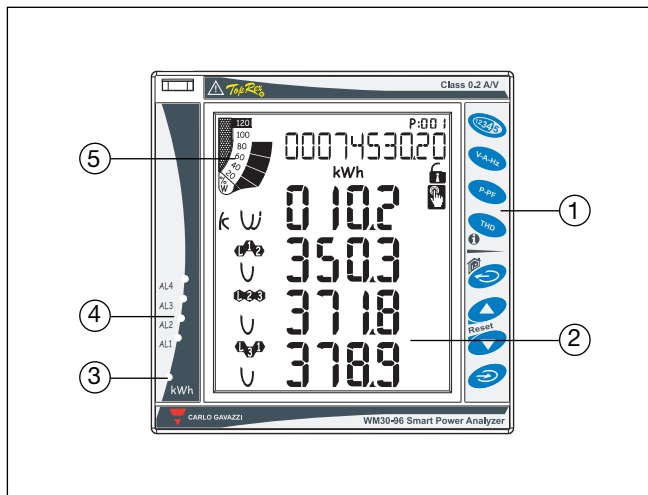

- 1. Key-pad**  
To program the configuration parameters and scroll the variables on the display.
- 2. Display**  
LCD-type with alphanumeric indications to:
  - display configuration parameters;
  - display all the measured variables.
- 3. kWh LED**  
Red LED blinking proportional to the energy being measured
- 4. Alarm LED's**  
Red LED's light-on when virtual alarms are activated.
- 5. Main bar-graph**  
To display the power consumption versus the installed power.

## Dimensions and Panel cut-out

