

M II - Type

SPOT & FLOOD - High Voltage

PAR30

50W Equivalent

Dimmable

Ø95mm



Base Type : E27

Input Voltage : H2 200~240V

LED Source : Nichia/Epistar

Nichia 757 - Beam Angle : 28°, 40°

Epistar 3030 - Beam Angle : 25°, 36°

Total Power Consumption : 11W±10%

Safety & Environment Specifications

M II - Type - PAR30 bulbs are manufactured to conform to the following safety approbation.

Certificated Mark			EMC	LVD	ErP		REACH
Certificate Approval	●	●	●	●	●	●	●

Certificate Approval : ● : Completed △ : In Progress

200/240V Dimmable Compatibility

BLTC's dimmable lamps can work with most of leading edge (TRIAC) and trailing edge dimmers, however please note 100% compatibility can not be guaranteed due to the variety and quality of dimmers in the market.

Some of the compatibility issues may include audible noise, flickering and higher light output when the dimmer is set at a certain level.

Maximum total LED lamps power ≤ (20%)dimmer's maximum rated power. For instance, if a dimmer's maximum rated power is 600 Watts, the recommended maximum LED lamp load power should be under 120 Watts.

Energy Efficiency Class : A+
Rated luminous flux (ErP) : 480lm

Specification

Polar Diagram	No.	Part Number	LED Source	Input Voltage	CCT	C.R.I. (RA)	Beam Angle (°)	CBCP Candela (cd)	Total Pow. +/- 10%	Typical Lumens (lm)	Efficiency (lm/W)	Dimming	Power Factor H2
	1	BLM3027M-NVW131H2(LG)DM2	N-757	200V/240V	2700K	80	28	2090	11	935	85	YES	0.9
	2	BLM3027M-NWW131H2(LG)DM2			3000K	80	28	2620	11	1015	92	YES	0.9
	3	BLM3027M-NCW131H2(LG)DM2			5000K	70	28	2650	11	1145	104	YES	0.9
	4	BLM3027M-NW131H2(LG)DM2			5700K	70	28	2715	11	1215	110	YES	0.9
	5	BLM3027M-TVW131H2(LG)DM2	EPISTAR 3030	200V/240V	2700K	80	25	3115	11	965	88	YES	0.9
	6	BLM3027M-TWW131H2(LG)DM2			3000K	80	25	3425	11	1060	96	YES	0.9
	7	BLM3027M-TNW131H2(LG)DM2			4000K	80	25	3735	11	1155	105	YES	0.9
	8	BLM3027M-TW131H2(LG)DM2			5700K	70	25	4050	11	1250	114	YES	0.9
	9	BLM3027W-NVW131H2(LG)DM2	N-757	200V/240V	2700K	80	40	1695	11	950	86	YES	0.9
	10	BLM3027W-NWW131H2(LG)DM2			3000K	80	40	1860	11	1025	93	YES	0.9
	11	BLM3027W-NCW131H2(LG)DM2			5000K	70	40	2210	11	1150	105	YES	0.9
	12	BLM3027W-NW131H2(LG)DM2			5700K	70	40	2300	11	1210	110	YES	0.9
	13	BLM3027W-TVW131H2(LG)DM2	EPISTAR 3030	200V/240V	2700K	80	38	2010	11	980	89	YES	0.9
	14	BLM3027W-TWW131H2(LG)DM2			3000K	80	38	2210	11	1075	98	YES	0.9
	15	BLM3027W-TNW131H2(LG)DM2			4000K	80	38	2410	11	1175	107	YES	0.9
	16	BLM3027W-TW131H2(LG)DM2			5700K	70	38	2615	11	1270	115	YES	0.9

Option 1 : Lamp base: E27

Option 2 : Input Voltage: H2 200~240V


Option 3 : The above CCT. is defined based on ANSI standard. Specific color temperature can be done upon customer request. For instance 2700K could be assigned as 2580~2725K or 2725~2870K, the same can be accomplished for 3500K and 5500K as well but shall be with different price. 2200K is also available upon request.

Option 4 : 4700~6700K typical CRI +70; 2580~4500K typical CRI +80; CRI+90 is also available upon request.

Option 5 : PAR30 will be short neck 3.65" if not specified. Another base of long neck 4.72" is available.


Certificate Approval :     

Illuminance Figure




Nichia 757
Average Angle: 28 deg

	2700K	3000K	5000K	5700K
	BLM3027M-NVW131H2DM2	BLM3027M-NWW131H2DM2	BLM3027M-NCW131H2DM2	BLM3027M-NW131H2DM2
Illuminance Figure	Center Illumination(lx)			
0.5m	8356	10475	10595	10855
1.0m	2090	2620	2650	2715
2.0m	522	654	662	678
2.5m	334	419	423	434
3.0m	232	291	294	301





Nichia 757
Average Angle: 40 deg

	2700K	3000K	5000K	5700K
	BLM3027W-NVW131H2DM2	BLM3027W-NWW131H2DM2	BLM3027W-NCW131H2DM2	BLM3027W-NW131H2DM2
Illuminance Figure	Center Illumination(lx)			
0.5m	6781	7441	8841	9201
1.0m	1695	1860	2210	2300
2.0m	424	465	553	575
2.5m	271	297	353	368
3.0m	188	206	245	255





Epistar 3030
Average Angle: 25 deg

	2700K	3000K	4000K	5700K
	BLM3027M-TVW131H2DM2	BLM3027M-TWW131H2DM2	BLM3027M-TNW131H2DM2	BLM3027M-TW131H2DM2
Illuminance Figure	Center Illumination(lx)			
0.5m	12456	13700	14940	16200
1.0m	3114	3425	3735	4050
2.0m	779	857	934	1013
2.5m	498	548	597	648
3.0m	346	381	415	450







Epistar 3030
Average Angle: 36 deg

	2700K	3000K	4000K	5700K
	BLM3027W-TVW131H2DM2	BLM3027W-TWW131H2DM2	BLM3027W-TNW131H2DM2	BLM3027W-TW131H2DM2
Illuminance Figure	Center Illumination(lx)			
0.5m	8039	8839	9639	10459
1.0m	2010	2210	2410	2615
2.0m	502	552	602	653
2.5m	322	354	386	419
3.0m	223	245	267	290




Product Packing PAR30

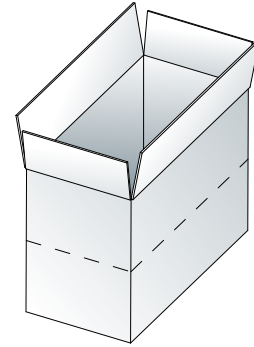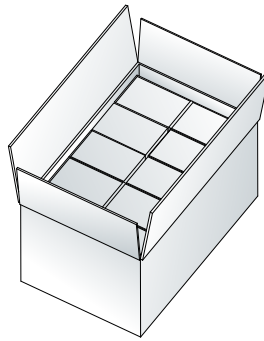
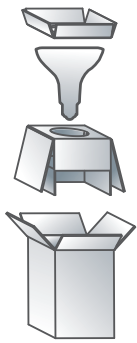


Step 1		Step 2		Step 3	
Gife Box/ White Box	1Pc of Lamp	Interior Box	20 Boxes	Outer Box	2 Inner Cartons (40 White Boxes)
Dimensions(mm)	L:102*W:102*H:150	Dimensions(mm)	L:534*W:430*H:164	Dimensions(mm)	L:550*W:446*H:360

Lamp body material

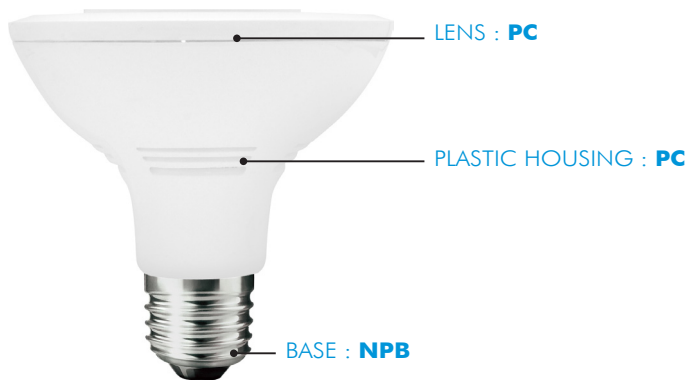

Dimension (mm) - Ø : 95 Net Weight (g)

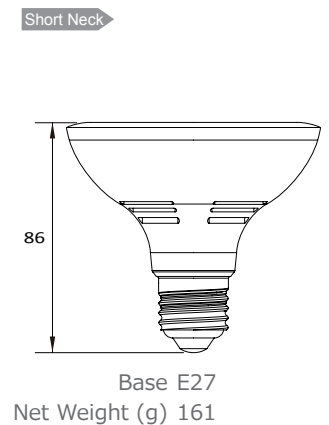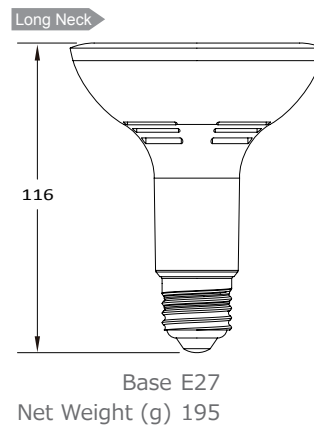

Luminaire Notice

The LED Lamp is not compatible with all luminaires for halogen lamps. Before installation, please read following guidelines:

- No sealed fixtures.
- Not for outdoor fixtures.
- Not for wet environment.



No sealed fixtures Not for outdoor fixtures

Safety Label & Warning

- Do not cover lamp with paper, fabric, or any flammable material to avoid burning.
- Working Environmental Temperature: -20 ~ +40°
- Do not insert metal objects into the gap of lamp base.
- The appropriate combination of lamp and lamp base should be carefully selected for different voltage and wattage.
- Do not use in high-humidity environment or near water to avoid damage. (Except B.L.T.C. Outdoor IP65 version)
- Not suitable for use in automatic light sensor system, emergency lighting fixture and mercury fixture to avoid damage and burning.
- Do not use near flammable objects such as gasoline, spray, chemicals, paints, oil...etc.
- Do not use in place that is likely to be impacted by force or vibration.
- Do not use in acidic environment.
- Please turn the light off when installing or cleaning to avoid electrical shock.
- Please handle with care to avoid damage and collision.
- Do not touch any powered-on lamps or lamps that have just been turned off to avoid burning.
- Please ensure the lamp is tightly installed into the socket to avoid dropping.
- Please select the appropriate fixture based on lamp size and weight.

General Guideline

- Slight difference of color temperature and brightness is likely to occur for the same part number due to the difference of LED chips.
- Brightness, color temperature, and light distribution may vary with different types of bulbs.
- To avoid heat build-up and the shortening of product lifetime, sealed fixture is not recommended.
- Keep the lamp away from radio, video and television for a distance of 1 meter to avoid noise caused by interference.
- Do not install lamp in heat insulated fixture.
- Do not disassemble or reconstruct the lamp.
- Do not stare directly at the lamp to avoid eye injury.
- The light distribution may vary with different type of fixtures.
- Do not wash the lamp with water.
- Do not use the lamp outdoor if it is not marked as IP65.
- To avoid damage and poor insulation, do not use the lamp near water or in frosted environment if it is not marked as IP65.
- For lamps with a weight significantly higher than that of the lamps for which they are a replacement, attention should be drawn to the fact that the increased weight may reduce the mechanical stability of certain luminaires and lampholders and may impair contact making and lamp retention.

Guide to Dimming

- The maximum LED lamp load is not clearly defined by most of the key dimmer manufactures.
- BLTC's dimmable lamps can work with most of leading edge (TRIAC) and trailing edge dimmers, however 100% compatibility cannot be guaranteed due to the variety and quality of dimmers in the market. Some of the compatibility issues may include audible noise, flickering and higher light output when the dimmer is set at a certain level.
- Maximum total LED lamps power should not exceed 20% of dimmer's maximum rated power.
- For instance, if a dimmer's maximum rated power is 600 Watts, the recommended maximum LED lamp load power should be under 120 Watts.
- The remote control may not work properly when using around infrared remote control such as television remote and AC remote.
- If the dimmer is set at a lower than 10% level when the bulb is turned on, it is possible to have no light emission at all or is easy to blink. In this case, please just tune the dimmer to 100% and turn the bulb on again.
- The time it takes to turn on the light may vary with different kind of dimmer switch.
- Do not use dimmer with non-dimmable bulbs to avoid damage and burning.
- Sometimes the lamp may fail to dim when working with the following kinds of dimmers.
 - sensor dimmers
 - stepping dimmers
 - remote control dimmers
 - dimmers with memory

function--to re-show the light scene with even just a button.

- When dimming, the brightness of the lamp will be affected by the variation of power supply and bulb types.
- When the dimmer is tuned at the lowest lever, a moment of brightness might occur after the power is turned on.
- When the dimmer is tuned at the lowest lever, dimming or flickering might occur when a high-power consumption device such as hair dryer or air conditioner is used due to power and current fluctuation.
- When turning off light, it is highly recommended to turn off the power switch instead of simply tuning the dimmer to the lowest level.
- When more than one bulb is connected to a dimmer, the brightness of each bulb may vary depending on its characteristic.
- It is normal to have minor noises when turning dimmers.
- If the light flickers when dimming, please adjust the dimmer until the light is tuned to a steady level.

Solution to Abnormal Dimmable Bulbs

- Please ensure the dimmer is operated on an independent AC line, not connecting to other electrical appliances or devices. If high-power consumption devices such as freezer, air conditioner, laundry machine, and hair dryers are connected to the same AC line with the dimmer, abnormal light emission is likely to occur.
- When abnormal light occur when a dimmer is connected to only one LED bulb, please try the combination of more than two LED bulbs. The optimal combination is to connect one dimmer to the quantity of LED bulbs adding up to over 35 watts. This is due to the minimum power consumption of a dimmer.