



Datenblatt - Fiche technique - Data sheet


11.02.9050



ROLINE USB 3.1 Kabel, mit PD (Power Delivery) 20V5A, Emark, C-C, ST/ST,
schwarz, 0,5 m

ROLINE Câble USB 3.1, avec PD (Power Delivery), avec Emark, C-C, M/M, noir,
0,5 m

ROLINE USB 3.1 Cable, PD (Power Delivery) 20V5A, with Emark, C-C, M/M,
black, 0.5 m

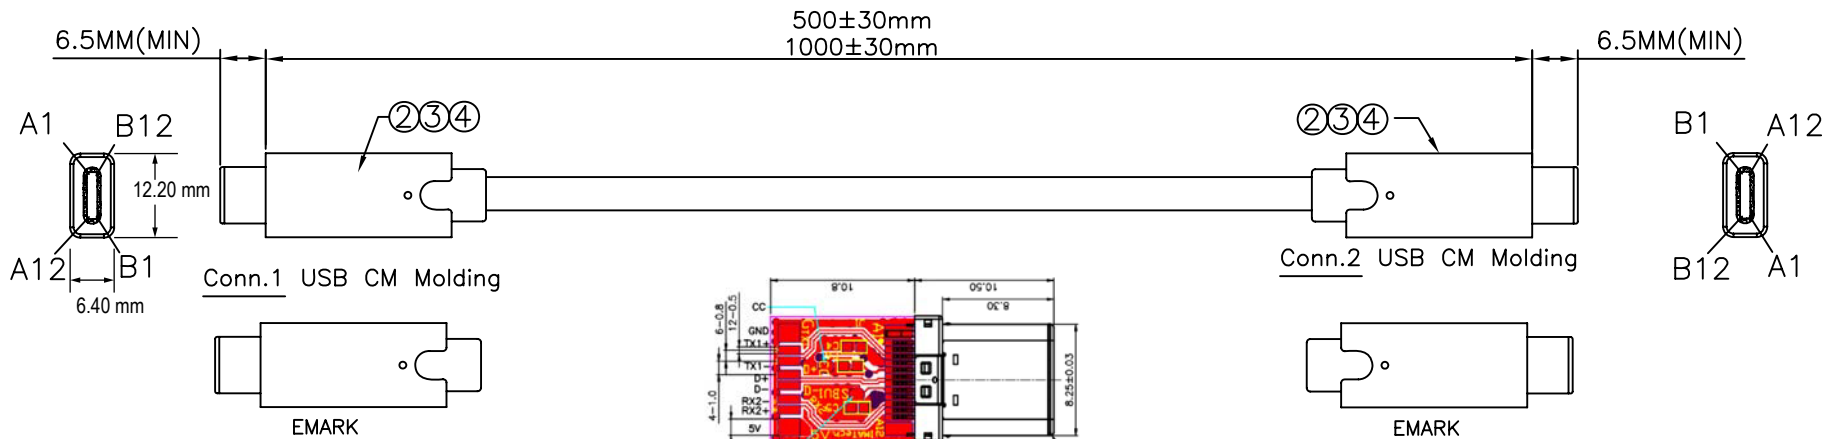

Electrical Test:


1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:300V DC/10ms

NOTE:

1. Super High Speed USB 3.1 Cable (30AWG*1P+D+AL+MY)*4C+30AWG*1P+30AWG*4C +22AWGT*2C+F+AB OD:5.0±0.2mm Color: Black
- 2.USB3.1 (C) M Solder Type Shell Nickel, Black Insulation,With USB3.1 C EMARK, PCB+SMT
- 3.INSIDE MOLDING:PE
- 4.OUTSIDE MOLDING:Black PVC

Part No.	Length
11.02.9050	500±30mm
11.02.9051	1000±30mm

Pin Assignment

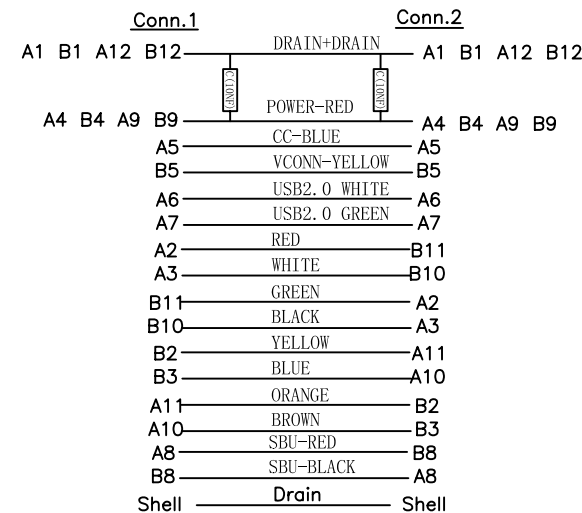

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL ±										APPROVAL	CHECK	DRAWING	DESIGN	DRAWING NAME	ROLINE USB 3.1 Cable		
				RANGE	Pla	Met	Ins	Por	Cab	Pac	Gas	DIS	DATE						C/C, M/M, w/PD, 20V5A, Black	PART NO.	11.02.9050, 11.02.9051
△				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2									
△				6~30	0.1	0.1	.15	.25	1	1	0.5	.25									
△				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3									
△				80~180	.15	.15	.25	0.3	2	2	1	.45									
△				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6									
△				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1									

SCALE 1:1 UNIT MM

SECOMP