

### FEATURES

#### Low Cost

Low Power: 1.15 mA Max for 5 V Supply

#### High Speed

400 MHz, -3 dB Bandwidth (G = +1)

4000 V/ $\mu$ s Slew Rate

60 ns Overload Recovery

Fast Settling Time of 24 ns

Drive Video Signals on 50  $\Omega$  Lines

#### Very Low Noise

3.5 nV/ $\sqrt{\text{Hz}}$  and 5 pA/ $\sqrt{\text{Hz}}$

5 nV/ $\sqrt{\text{Hz}}$  Total Input Referred Noise @ G = +3 w/500  $\Omega$

Feedback Resistor

Operates on +4.5 V to +12 V Supplies

Low Distortion -70 dB THD @ 5 MHz

Low, Temperature-Stable DC Offset

Available in SOIC-8 and SOT-23-5

### APPLICATIONS

Photo-Diode Preamp

Professional and Portable Cameras

Hand Sets

DVD/CD

Handheld Instruments

A-to-D Driver


Any Power-Sensitive High Speed System

### PRODUCT DESCRIPTION


The AD8014 is a revolutionary current feedback operational amplifier that attains new levels of combined bandwidth, power, output drive and distortion. Analog Devices, Inc. uses a proprietary circuit architecture to enable the highest performance amplifier at the lowest power. Not only is it technically superior, but is low priced, for use in consumer electronics. This general purpose amplifier is ideal for a wide variety of applications including battery operated equipment.

### FUNCTIONAL BLOCK DIAGRAMS

SOIC-8 (R)



SOT-23-5 (RT)



The AD8014 is a very high speed amplifier with 400 MHz, -3 dB bandwidth, 4000 V/ $\mu$ s slew rate, and 24 ns settling time. The AD8014 is a very stable and easy to use amplifier with fast overload recovery. The AD8014 has extremely low voltage and current noise, as well as low distortion, making it ideal for use in wide-band signal processing applications.

For a current feedback amplifier, the AD8014 has extremely low offset voltage and input bias specifications as well as low drift. The input bias current into either input is less than 15  $\mu$ A at +25°C with a typical drift of less than 50 nA/°C over the industrial temperature range. The offset voltage is 5 mV max with a typical drift less than 10  $\mu$ V/°C.

For a low power amplifier, the AD8014 has very good drive capability with the ability to drive 2 V p-p video signals on 75  $\Omega$  or 50  $\Omega$  series terminated lines and still maintain more than 135 MHz, 3 dB bandwidth.

Rev. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

# AD8014\* Product Page Quick Links

Last Content Update: 08/30/2016

---

## Comparable Parts

View a parametric search of comparable parts

## Evaluation Kits

- AD8014 Evaluation Board
- Universal Evaluation Board for Single High Speed Operational Amplifiers

## Documentation

### Application Notes

- AN-356: User's Guide to Applying and Measuring Operational Amplifier Specifications
- AN-358: Noise and Operational Amplifier Circuits
- AN-649: Using the Analog Devices Active Filter Design Tool
- AN-692: Universal Precision Op Amp Evaluation Board

### Data Sheet

- AD8014: 400 MHz Low Power High Performance Amplifier Data Sheet

### User Guides

- UG-101: Evaluation Board User Guide
- UG-127: Universal Evaluation Board for High Speed Op Amps in SOT-23-5/SOT-23-6 Packages
- UG-755: 8-Lead SOIC Amplifier Evaluation Board User Guide
- UG-838: Evaluation Board for Single, High Speed Op Amps Offered in 5-Lead SOT-23 and 6-Lead SOT-23 Packages

## Tools and Simulations

- Analog Filter Wizard
- Analog Photodiode Wizard
- AD8014 SPICE Macro-Model

## Reference Designs

- CN0304

## Reference Materials

### Analog Dialogue

- Current Feedback Amplifiers - Part 1
- Current Feedback Amplifiers - Part 2
- Two-Stage Current-Feedback Amplifier

### Product Selection Guide

- High Speed Amplifiers Selection Table

### Tutorials

- MT-034: Current Feedback (CFB) Op Amps
- MT-051: Current Feedback Op Amp Noise Considerations
- MT-057: High Speed Current Feedback Op Amps
- MT-059: Compensating for the Effects of Input Capacitance on VFB and CFB Op Amps Used in Current-to-Voltage Converters

## Design Resources

- AD8014 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

## Discussions

View all AD8014 EngineerZone Discussions

## Sample and Buy

Visit the product page to see pricing options

## Technical Support

Submit a technical question or find your regional support number

---

\* This page was dynamically generated by Analog Devices, Inc. and inserted into this data sheet. Note: Dynamic changes to the content on this page does not constitute a change to the revision number of the product data sheet. This content may be frequently modified.

# AD8014—SPECIFICATIONS (@ $T_A = +25^\circ\text{C}$ , $V_S = \pm 5\text{ V}$ , $R_L = 150\ \Omega$ , $R_F = 1\ \text{k}\Omega$ , Gain = +2, unless otherwise noted)

Parameter	Conditions	AD8014AR/RT			Units
		Min	Typ	Max	
<b>DYNAMIC PERFORMANCE</b>					
-3 dB Bandwidth Small Signal	$G = +1$ , $V_O = 0.2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$	400	480		MHz
	$G = -1$ , $V_O = 0.2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$	120	160		MHz
-3 dB Bandwidth Large Signal	$V_O = 2\ \text{V p-p}$	140	180		MHz
	$V_O = 2\ \text{V p-p}$ , $R_F = 500\ \Omega$	170	210		MHz
	$V_O = 2\ \text{V p-p}$ , $R_F = 500\ \Omega$ , $R_L = 50\ \Omega$		130		MHz
0.1 dB Small Signal Bandwidth	$V_O = 0.2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$		12		MHz
0.1 dB Large Signal Bandwidth	$V_O = 2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$		20		MHz
Slew Rate, 25% to 75%, $V_O = 4\ \text{V Step}$	$R_L = 1\ \text{k}\Omega$ , $R_F = 500\ \Omega$		4600		V/ $\mu\text{s}$
	$R_L = 1\ \text{k}\Omega$		2800		V/ $\mu\text{s}$
	$G = -1$ , $R_L = 1\ \text{k}\Omega$ , $R_F = 500\ \Omega$		4000		V/ $\mu\text{s}$
	$G = -1$ , $R_L = 1\ \text{k}\Omega$		2500		V/ $\mu\text{s}$
Settling Time to 0.1%	$G = +1$ , $V_O = 2\ \text{V Step}$ , $R_L = 1\ \text{k}\Omega$		24		ns
Rise and Fall Time 10% to 90%	2 V Step		1.6		ns
	$G = -1$ , 2 V Step		2.8		ns
Overload Recovery to Within 100 mV	0 V to $\pm 4\ \text{V Step}$ at Input		60		ns
<b>NOISE/HARMONIC PERFORMANCE</b>					
Total Harmonic Distortion	$f_C = 5\ \text{MHz}$ , $V_O = 2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$		-68		dB
	$f_C = 5\ \text{MHz}$ , $V_O = 2\ \text{V p-p}$		-51		dB
	$f_C = 20\ \text{MHz}$ , $V_O = 2\ \text{V p-p}$		-45		dB
SFDR	$f_C = 20\ \text{MHz}$ , $V_O = 2\ \text{V p-p}$		-48		dB
Input Voltage Noise	$f = 10\ \text{kHz}$		3.5		nV/ $\sqrt{\text{Hz}}$
Input Current Noise	$f = 10\ \text{kHz}$		5		pA/ $\sqrt{\text{Hz}}$
Differential Gain Error	NTSC, $G = +2$ , $R_F = 500\ \Omega$		0.05		%
	NTSC, $G = +2$ , $R_F = 500\ \Omega$ , $R_L = 50\ \Omega$		0.46		%
Differential Phase Error	NTSC, $G = +2$ , $R_F = 500\ \Omega$		0.30		Degree
	NTSC, $G = +2$ , $R_F = 500\ \Omega$ , $R_L = 50\ \Omega$		0.60		Degree
Third Order Intercept	$f = 10\ \text{MHz}$		22		dBm
<b>DC PERFORMANCE</b>					
Input Offset Voltage			2	5	mV
	$T_{\text{MIN}}-T_{\text{MAX}}$		2	6	mV
Input Offset Voltage Drift			10		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	+Input or -Input		5	15	$\mu\text{A}$
Input Bias Current Drift			50		nA/ $^\circ\text{C}$
Input Offset Current			5		$\pm\mu\text{A}$
Open Loop Transresistance		800	1300		k $\Omega$
<b>INPUT CHARACTERISTICS</b>					
Input Resistance	+Input		450		k $\Omega$
Input Capacitance	+Input		2.3		pF
Input Common-Mode Voltage Range		$\pm 3.8$	$\pm 4.1$		V
Common-Mode Rejection Ratio	$V_{\text{CM}} = \pm 2.5\ \text{V}$	-52	-57		dB
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Swing	$R_L = 150\ \Omega$	$\pm 3.4$	$\pm 3.8$		V
	$R_L = 1\ \text{k}\Omega$	$\pm 3.6$	$\pm 4.0$		V
Output Current	$V_O = \pm 2.0\ \text{V}$	40	50		mA
Short Circuit Current			70		mA
Capacitive Load Drive for 30% Overshoot	2 V p-p, $R_L = 1\ \text{k}\Omega$ , $R_F = 500\ \Omega$		40		pF
<b>POWER SUPPLY</b>					
Operating Range		$\pm 2.25$	$\pm 5$	$\pm 6.0$	V
Quiescent Current			1.15	1.3	mA
Power Supply Rejection Ratio	$\pm 4\ \text{V}$ to $\pm 6\ \text{V}$	-55	-58		dB

Specifications subject to change without notice.

# SPECIFICATIONS

(@  $T_A = +25^\circ\text{C}$ ,  $V_S = +5\text{ V}$ ,  $R_L = 150\ \Omega$ ,  $R_F = 1\ \text{k}\Omega$ , Gain = +2, unless otherwise noted)

Parameter	Conditions	AD8014AR/RT			Units
		Min	Typ	Max	
<b>DYNAMIC PERFORMANCE</b>					
-3 dB Bandwidth Small Signal	$G = +1$ , $V_O = 0.2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$	345	430		MHz
	$G = -1$ , $V_O = 0.2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$	100	135		MHz
-3 dB Bandwidth Large Signal	$V_O = 2\ \text{V p-p}$	75	100		MHz
	$V_O = 2\ \text{V p-p}$ , $R_F = 500\ \Omega$	90	115		MHz
	$V_O = 2\ \text{V p-p}$ , $R_F = 500\ \Omega$ , $R_L = 75\ \Omega$		100		MHz
0.1 dB Small Signal Bandwidth	$V_O = 0.2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$		10		MHz
0.1 dB Large Signal Bandwidth	$V_O = 2\ \text{V p-p}$		20		MHz
Slew Rate, 25% to 75%, $V_O = 2\ \text{V Step}$	$R_L = 1\ \text{k}\Omega$ , $R_F = 500\ \Omega$		3900		V/ $\mu\text{s}$
	$R_L = 1\ \text{k}\Omega$		1100		V/ $\mu\text{s}$
	$G = -1$ , $R_L = 1\ \text{k}\Omega$ , $R_F = 500\ \Omega$		1800		V/ $\mu\text{s}$
	$G = -1$ , $R_L = 1\ \text{k}\Omega$		1100		V/ $\mu\text{s}$
Settling Time to 0.1%	$G = +1$ , $V_O = 2\ \text{V Step}$ , $R_F = 1\ \text{k}\Omega$		24		ns
Rise and Fall Time 10% to 90%	2 V Step		1.9		ns
	$G = -1$ , 2 V Step		2.8		ns
Overload Recovery to Within 100 mV	0 V to $\pm 2\ \text{V Step}$ at Input		60		ns
<b>NOISE/HARMONIC PERFORMANCE</b>					
Total Harmonic Distortion	$f_C = 5\ \text{MHz}$ , $V_O = 2\ \text{V p-p}$ , $R_L = 1\ \text{k}\Omega$		-70		dB
	$f_C = 5\ \text{MHz}$ , $V_O = 2\ \text{V p-p}$		-51		dB
	$f_C = 20\ \text{MHz}$ , $V_O = 2\ \text{V p-p}$		-45		dB
SFDR	$f_C = 20\ \text{MHz}$ , $V_O = 2\ \text{V p-p}$		-47		dB
Input Voltage Noise	$f = 10\ \text{kHz}$		3.5		nV/ $\sqrt{\text{Hz}}$
Input Current Noise	$f = 10\ \text{kHz}$		5		pA/ $\sqrt{\text{Hz}}$
Differential Gain Error	NTSC, $G = +2$ , $R_F = 500\ \Omega$		0.06		%
	NTSC, $G = +2$ , $R_F = 500\ \Omega$ , $R_L = 50\ \Omega$		0.05		%
Differential Phase Error	NTSC, $G = +2$ , $R_F = 500\ \Omega$		0.03		Degree
	NTSC, $G = +2$ , $R_F = 500\ \Omega$ , $R_L = 50\ \Omega$		0.30		Degree
Third Order Intercept	$f = 10\ \text{MHz}$		22		dBm
<b>DC PERFORMANCE</b>					
Input Offset Voltage			2	5	mV
	$T_{\text{MIN}} - T_{\text{MAX}}$		2	6	mV
Input Offset Voltage Drift			10		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	+Input or -Input		5	15	$\mu\text{A}$
Input Bias Current Drift			50		nA/ $^\circ\text{C}$
Input Offset Current			5		$\pm\mu\text{A}$
Open Loop Transresistance		750	1300		k $\Omega$
<b>INPUT CHARACTERISTICS</b>					
Input Resistance	+Input		450		k $\Omega$
Input Capacitance	+Input		2.3		pF
Input Common-Mode Voltage Range		1.2	1.1 to 3.9	3.8	V
Common-Mode Rejection Ratio	$V_{\text{CM}} = 1.5\ \text{V to } 3.5\ \text{V}$	-52	-57		dB
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Swing	$R_L = 150\ \Omega$ to 2.5 V	1.4	1.1 to 3.9	3.6	V
	$R_L = 1\ \text{k}\Omega$ to 2.5 V	1.2	0.9 to 4.1	3.8	V
Output Current	$V_O = 1.5\ \text{V to } 3.5\ \text{V}$	30	50		mA
Short Circuit Current			70		mA
Capacitive Load Drive for 30% Overshoot	2 V p-p, $R_L = 1\ \text{k}\Omega$ , $R_F = 500\ \Omega$		55		pF
<b>POWER SUPPLY</b>					
Operating Range		4.5	5	12	V
Quiescent Current			1.0	1.15	mA
Power Supply Rejection Ratio	4 V to 5.5 V	-55	-58		dB

Specifications subject to change without notice.

# AD8014

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup>

Supply Voltage	12.6 V
Internal Power Dissipation <sup>2</sup>	
Small Outline Package (R)	0.75 W
SOT-23-5 Package (RT)	0.5 W
Input Voltage Common Mode	$\pm V_S$
Differential Input Voltage	$\pm 2.5$ V
Output Short Circuit Duration	Observe Power Derating Curves
Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	-40°C to +85°C
Lead Temperature (Soldering 10 sec)	+300°C
ESD (Human Body Model)	+1500 V

## NOTES

<sup>1</sup> Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only, functional operation of the device at these or any other conditions above listed in the operational section of this specification is not implied. Exposure to Absolute Maximum Ratings for any extended periods may affect device reliability.

<sup>2</sup> Specification is for device in free air at 25°C.

8-Lead SOIC Package  $\theta_{JA} = 155^\circ\text{C/W}$ .

5-Lead SOT-23 Package  $\theta_{JA} = 240^\circ\text{C/W}$ .

## MAXIMUM POWER DISSIPATION

The maximum power that can be safely dissipated by the AD8014 is limited by the associated rise in junction temperature. The maximum safe junction temperature for plastic encapsulated devices is determined by the glass transition temperature of the

plastic. This is approximately +150°C. Even temporarily exceeding this limit may cause a shift in parametric performance due to a change in the stresses exerted on the die by the package. Exceeding a junction temperature of +175°C may result in device failure.

The output stage of the AD8014 is designed for large load current capability. As a result, shorting the output to ground or to power supply sources may result in a very large power dissipation. To ensure proper operation it is necessary to observe the maximum power derating tables.

**Table I. Maximum Power Dissipation vs. Temperature**

Ambient Temp °C	Power Watts SOT-23-5	Power Watts SOIC
-40	0.79	1.19
-20	0.71	1.06
0	0.63	0.94
+20	0.54	0.81
+40	0.46	0.69
+60	0.38	0.56
+80	0.29	0.44
+100	0.21	0.31

## CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the AD8014 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



# Typical Performance Characteristics—AD8014

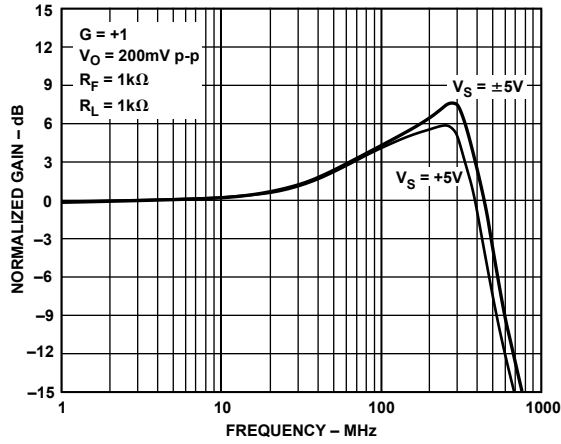


Figure 1. Frequency Response,  $G = +1$ ,  $V_S = \pm 5\text{ V}$  and  $+5\text{ V}$

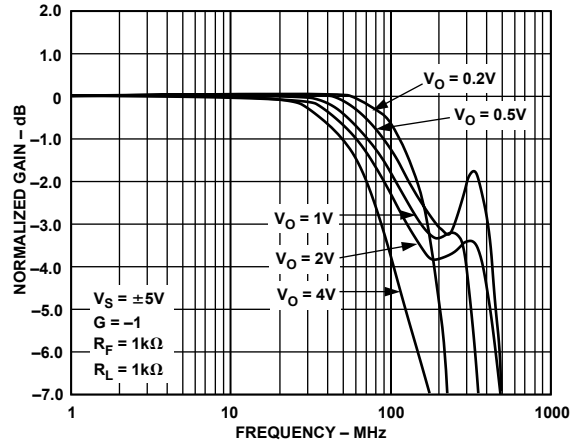


Figure 4. Bandwidth vs. Output Level—Gain of  $-1$ , Dual Supply

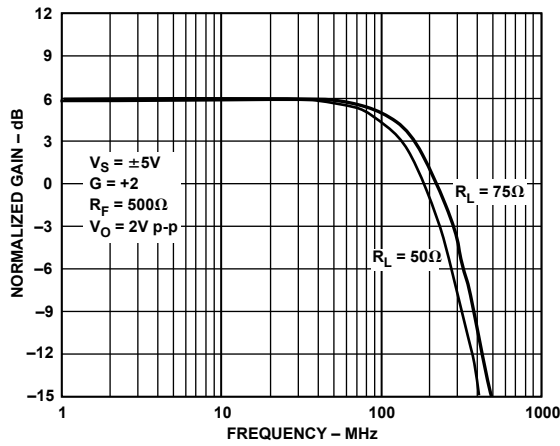


Figure 2. Frequency Response,  $G = +2$ ,  $V_O = 2\text{ V p-p}$

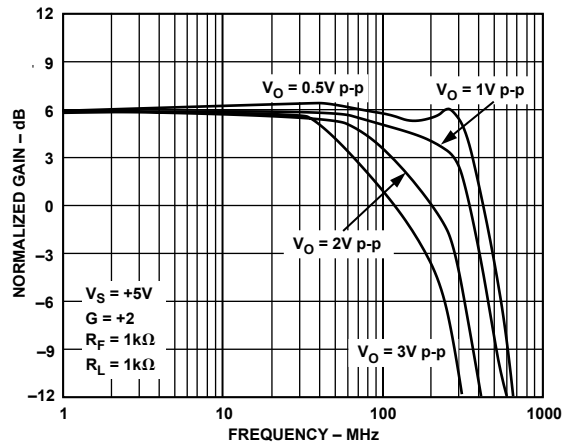


Figure 5. Bandwidth vs. Output Level—Single Supply,  $G = +2$

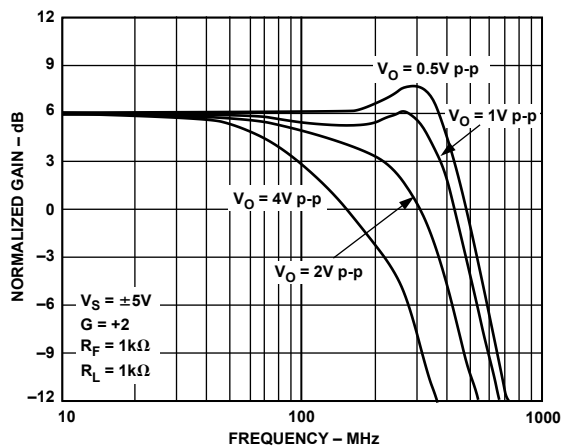


Figure 3. Bandwidth vs. Output Voltage Level—Dual Supply,  $G = +2$

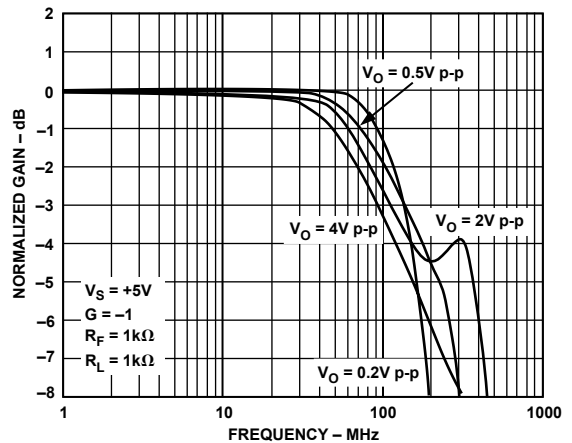


Figure 6. Bandwidth vs. Output Level—Single Supply, Gain of  $-1$

# AD8014

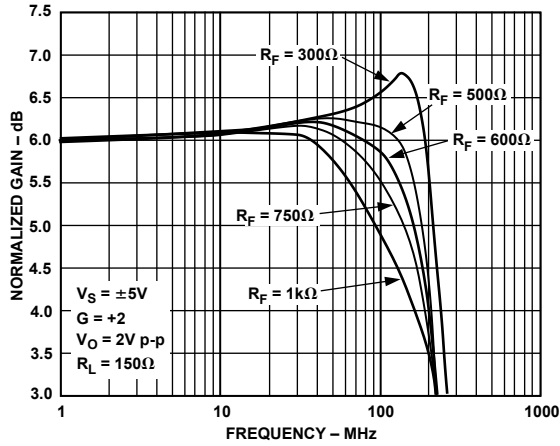


Figure 7. Bandwidth vs. Feedback Resistor—Dual Supply

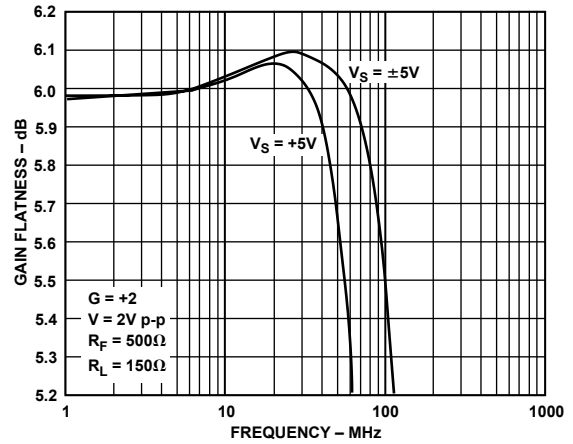


Figure 10. Gain Flatness—Large Signal

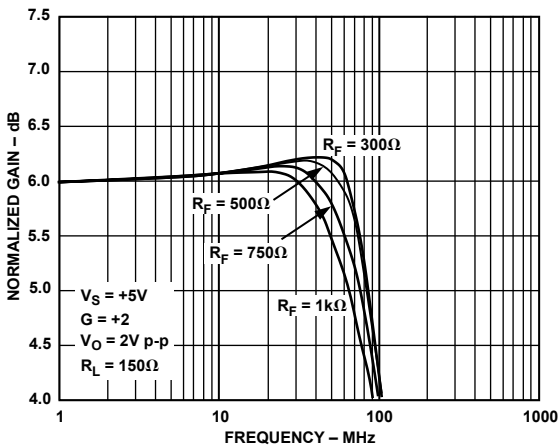


Figure 8. Bandwidth vs. Feedback Resistor—Single Supply

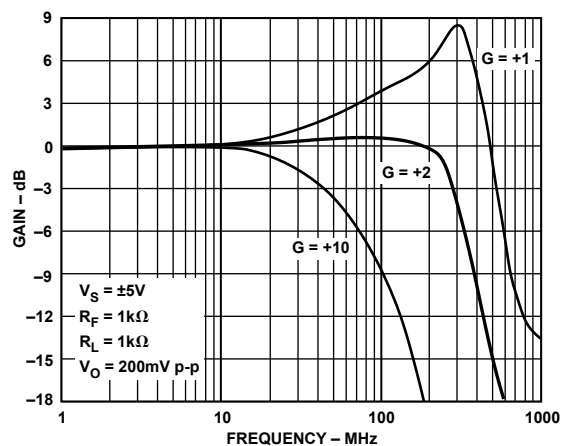


Figure 11. Bandwidth vs. Gain—Dual Supply,  $R_F = 1k\Omega$

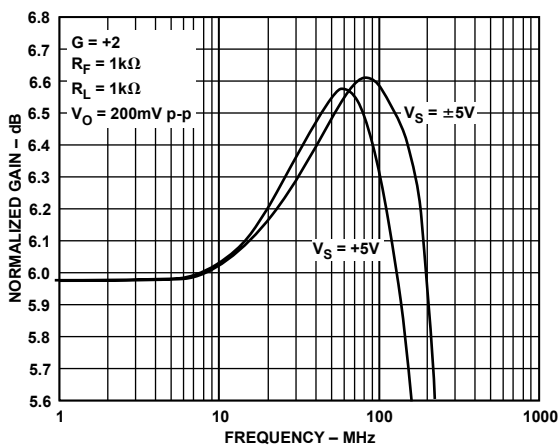


Figure 9. Gain Flatness—Small Signal

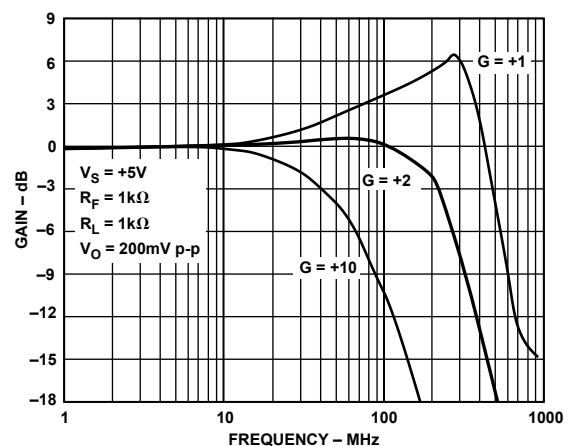


Figure 12. Bandwidth vs. Gain—Single Supply

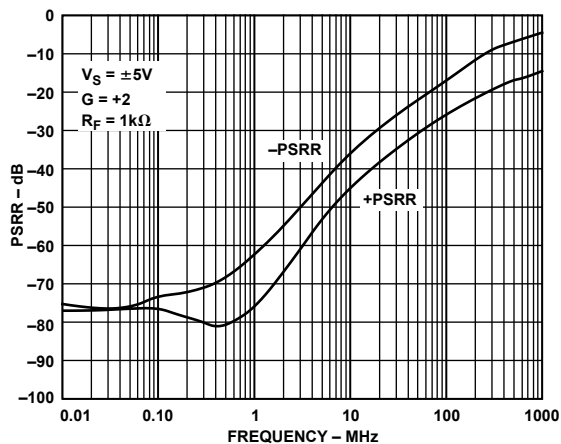


Figure 13. PSRR vs. Frequency

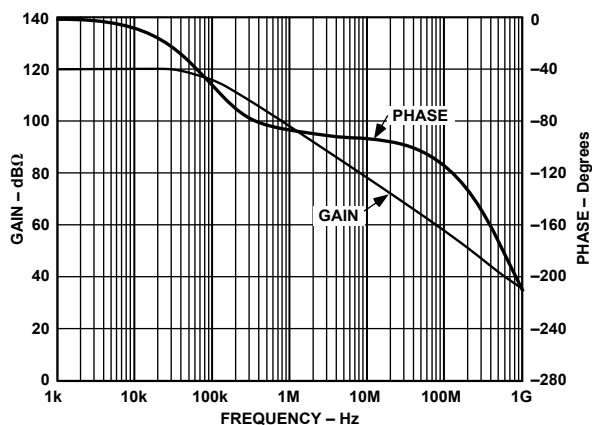


Figure 16. Transimpedance Gain and Phase vs. Frequency

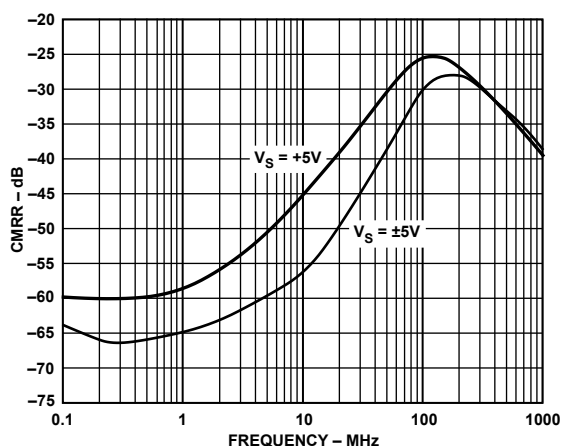


Figure 14. CMRR vs. Frequency

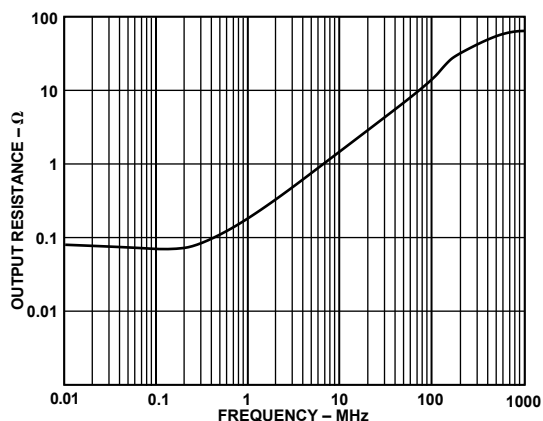


Figure 17. Output Resistance vs. Frequency,  $V_S = \pm 5 V$  and  $+5 V$

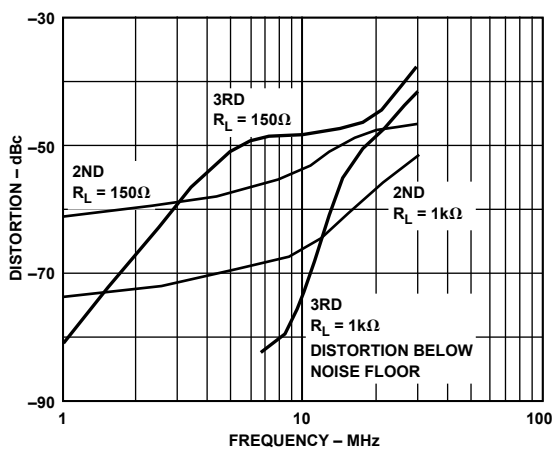


Figure 15. Distortion vs. Frequency;  $V_S = \pm 5 V$ ,  $G = +2$

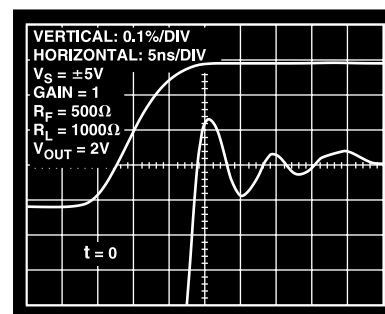


Figure 18. Settling Time



# AD8014

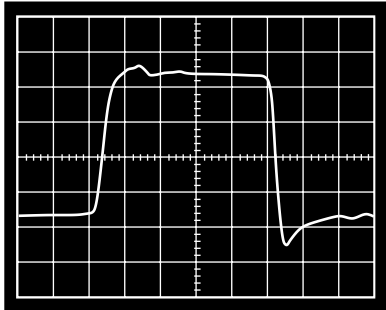


Figure 19. Large Signal Step Response;  $V_S = \pm 5 V$ ,  $V_O = 4 V$  Step

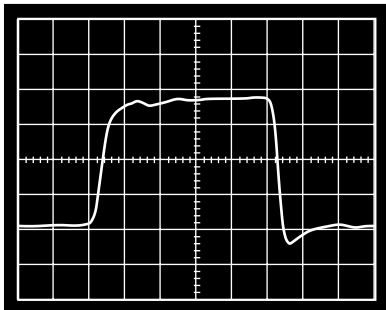


Figure 20. Large Signal Step Response;  $V_S = +5 V$ ,  $V_O = 2 V$  Step

Note: On Figures 19 and 20  $R_F = 500 \Omega$ ,  $R_S = 50 \Omega$  and  $C_L = 20 \text{ pF}$ .

## APPLICATIONS

### CD ROM and DVD Photodiode Preamp

High speed Multi-X CD ROM and DVD drives require high frequency photodiode preamps for their read channels. To minimize the effects of the photodiode capacitance, the low impedance of the inverting input of a current feedback amplifier is advantageous. Good group delay characteristics will preserve the pulse response of these pulses. The AD8014, having many advantages, can make an excellent low cost, low noise, low power, and high bandwidth photodiode preamp for these applications.

Figure 21 shows the circuit that was used to imitate a photodiode preamp. A photodiode for this application is basically a high impedance current source that is shunted by a small capacitance. In this case, a high voltage pulse from a Picosecond Pulse Labs Generator that is ac-coupled through a  $20 \text{ k}\Omega$  resistor is used to simulate the high impedance current source of a photodiode. This circuit will convert the input voltage pulse into a small charge package that is converted back to a voltage by the AD8014 and the feedback resistor.

In this case the feedback resistor chosen was  $1.74 \text{ k}\Omega$ , which is a compromise between maintaining bandwidth and providing sufficient gain in the preamp stage. The circuit preserves the pulse shape very well with very fast rise time and a minimum of overshoot as shown in Figure 22.

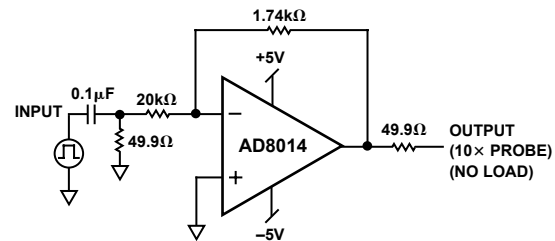


Figure 21. AD8014 as a Photodiode Preamp

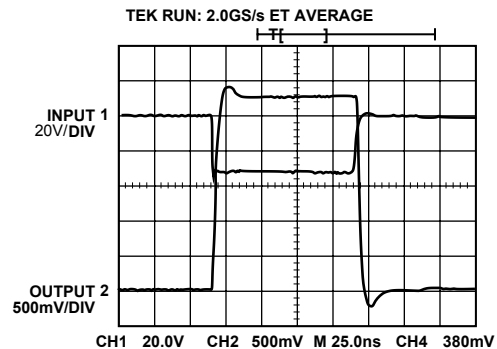


Figure 22. Pulse Response

## Video Drivers

The AD8014 easily drives series terminated cables with video signals. Because the AD8014 has such good output drive you can parallel two or three cables driven from the same AD8014. Figure 23 shows the differential gain and phase driving one video cable. Figure 24 shows the differential gain and phase driving two video cables. Figure 25 shows the differential gain and phase driving three video cables.

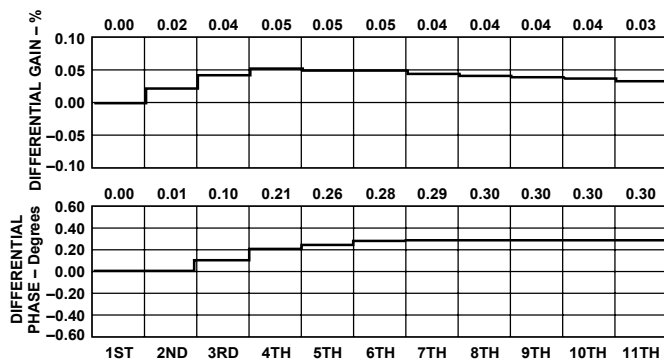


Figure 23. Differential Gain and Phase  $R_F = 500, \pm 5 V, R_L = 150 \Omega$ , Driving One Cable,  $G = +2$

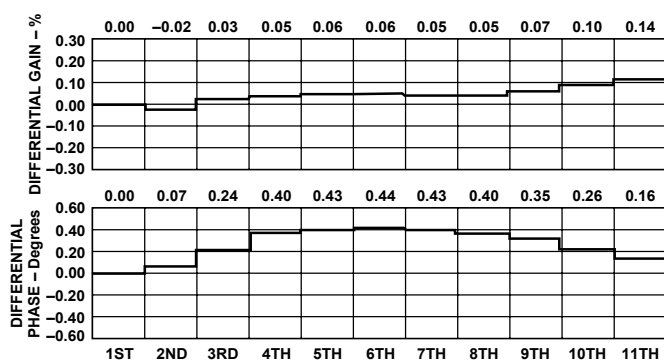


Figure 24. Differential Gain and Phase  $R_F = 500, \pm 5 V, R_L = 75 \Omega$ , Driving Two Cables,  $G = +2$

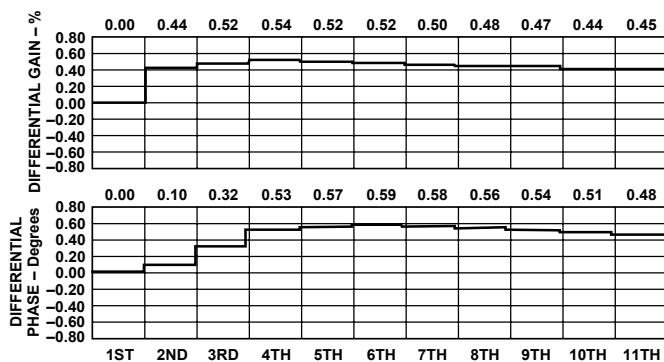


Figure 25. Differential Gain and Phase  $R_F = 500, \pm 5 V, R_L = 50 \Omega$ , Driving Three Cables,  $G = +2$

## DRIVING CAPACITIVE LOADS

The AD8014 was designed primarily to drive nonreactive loads. If driving loads with a capacitive component is desired, best settling response is obtained by the addition of a small series resistance as shown in Figure 26. The accompanying graph shows the optimum value for  $R_{SERIES}$  vs. Capacitive Load. It is worth noting that the frequency response of the circuit when driving large capacitive loads will be dominated by the passive roll-off of  $R_{SERIES}$  and  $C_L$ .

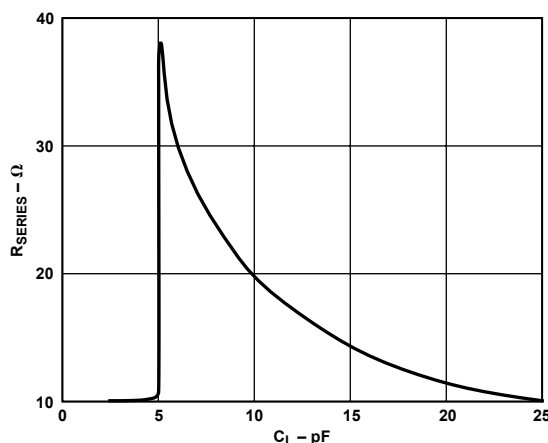


Figure 26. Driving Capacitive Load

## Choosing Feedback Resistors

Changing the feedback resistor can change the performance of the AD8014 like any current feedback op amp. The table below illustrates common values of the feedback resistor and the performance which results.


Table II.

Gain	$R_F$	$R_G$	-3 dB BW $V_O = \pm 0.2 V$ $R_L = 1 k\Omega$	-3 dB BW $V_O = \pm 0.2 V$ $R_L = 150 \Omega$
+1	1 k $\Omega$	Open	480	430
+2	1 k $\Omega$	1 k $\Omega$	280	260
+10	1 k $\Omega$	111 $\Omega$	50	45
-1	1 k $\Omega$	1 k $\Omega$	160	150
-2	1 k $\Omega$	499 $\Omega$	140	130
-10	1 k $\Omega$	100 $\Omega$	45	40
+2	2 k $\Omega$	2 k $\Omega$	200*	180*
+2	750 $\Omega$	750 $\Omega$	260*	210*
+2	499 $\Omega$	499 $\Omega$	280*	230*

\* $V_O = \pm 1 V$ .

# AD8014


## OUTLINE DIMENSIONS

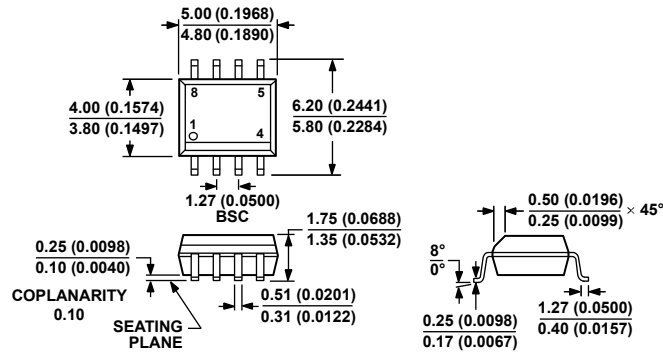

COMPLIANT TO JEDEC STANDARDS MS-012-AA  
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
 (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 27. 8-Lead Standard Small Outline Package [SOIC\_N]  
 Narrow Body (R-8)

012407-A

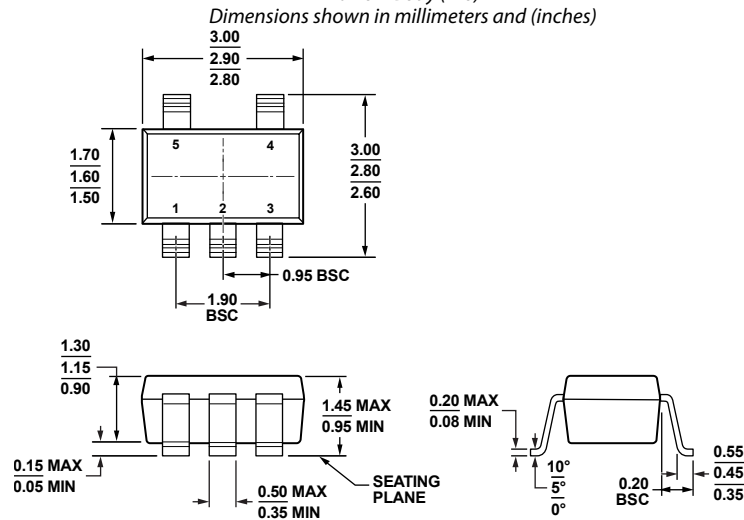

COMPLIANT TO JEDEC STANDARDS MO-178-AA  
 Figure 28. 5-Lead Small Outline Transistor Package [SOT-23]  
 (RJ-5)

Dimensions shown in millimeters

121608-A

## ORDERING GUIDE

Model <sup>1</sup>	Temperature Range	Package Description	Package Option	Branding
AD8014AR	-40°C to +85°C	8-Lead SOIC_N	R-8	
AD8014AR-REEL7	-40°C to +85°C	8-Lead SOIC_N	R-8	
AD8014ARZ	-40°C to +85°C	8-Lead SOIC_N	R-8	
AD8014ARZ-REEL	-40°C to +85°C	8-Lead SOIC_N	R-8	
AD8014ARZ-REEL7	-40°C to +85°C	8-Lead SOIC_N	R-8	
AD8014ART-R2	-40°C to +85°C	5-Lead SOT-23	RJ-5	HAA
AD8014ART-REEL7	-40°C to +85°C	5-Lead SOT-23	RJ-5	HAA
AD8014ARTZ-R2	-40°C to +85°C	5-Lead SOT-23	RJ-5	H09
AD8014ARTZ-REEL	-40°C to +85°C	5-Lead SOT-23	RJ-5	H09
AD8014ARTZ-REEL7	-40°C to +85°C	5-Lead SOT-23	RJ-5	H09

<sup>1</sup> Z = RoHS Compliant Part.

**REVISION HISTORY**

Changes to Figure 22 .....8  
Updated Outline Dimensions.....10  
Changes to Ordering Guide.....10

