SHEET 1 OF 1

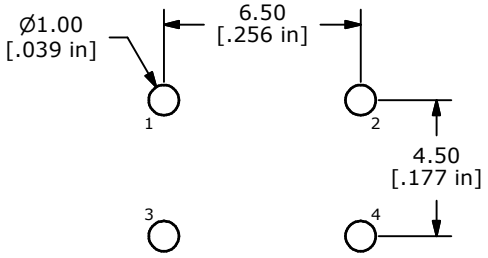

P.C.B. LAYOUT

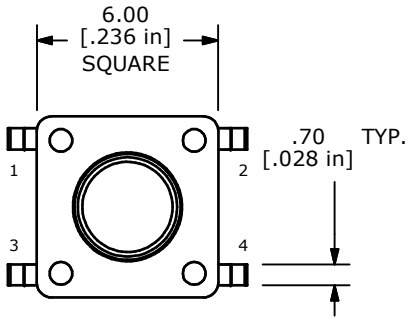

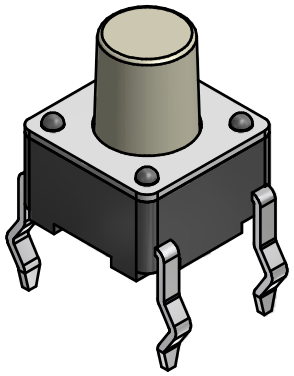



CIRCUIT: SPST

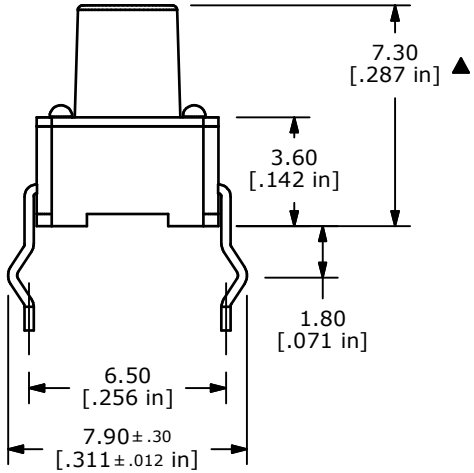

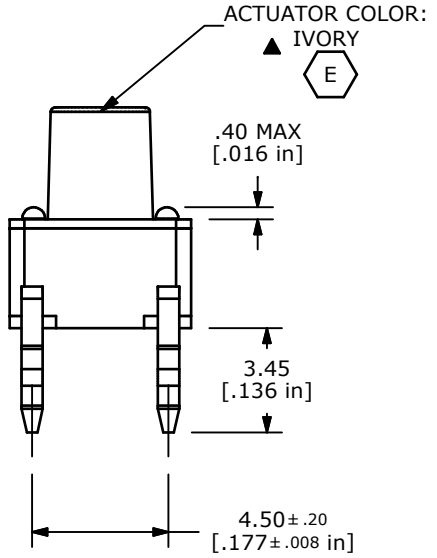

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
▲ 5. OPERATING FORCE: 160 ± 50 gms
6. TRAVEL: 0.25mm +0.20/-0.10MM
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
▲ 9. SILVER CONTACTS
10. ▲DENOTES CRITICAL PARAMETER

REV	PCR NO	DESCRIPTION	DATE	BY
E	21238	ACTUATOR COLOR WAS BLACK	9/16/13	EBP
D	20848	REDRAWN	10/25/12	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE TL1105EF160Q

SCALE	DATE	DR	DWG	REV
4:1	9/16/2013		P010006	E