




NOTES:

- SCHEMATIC SHOWN REPRESENTS CURRENT TRIP CIRCUITS.
- MULTI-POLE UNITS ARE ASSEMBLED AT FACTORY WITH **COMMON HANDLE TIE.**
- PANEL THICKNESS SHOULD BE 0.04 TO 0.10 INCHES

TIGHTENING TORQUE SPECIFICATION	
AD SIZE	TORQUE
#6-32[M3] MOUNTING	7-9-IN-LBS
NSERT	[0.8-1.0 NM]
2 & M5 STUDS	15-20 IN-LBS [1.7-2.3 NM]
2 THD REW	15-20 IN-LBS [1.7-2.3 NM]
0 & M6 STUDS	30-35 IN-LBS [3.4-4.0]
S	

	TERMINAL DESCRIPTION	CODE	AGENCY APPROVAL	AMPERE RATING	HARDWARE SUPLIED	
	#10-32 STUD	1	ALL	.02-50	LOCK WASHER - FLAT WASHER - NUT	
	M5 STUD	4	ALL	.02-50	LOCK WASHER - FLAT WASHER - NUT	PROPRIETARY NOTICE
S.	#1/4-20 STUD 3		.02-80	LOCK WASHER - FLAT WASHER - NUT	NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF	
		3	3 ALL	81-100 LOCK WASHER - NUT - (2) FLAT WASHER - N	CARLING TECHNOLOGIES, INC. AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES	
				.02-80	LOCK WASHER - FLAT WASHER - NUT	BY ANYONE WITHOUT THE CONSENT OF CARLING TECHNOLOGIES, INC.
	M6 STUD	6	ALL	81-100	LOCK WASHER - NUT - (2) FLAT WASHER - NUT	·
			UL RECOGNIZED	.02-50	SADDLE CLAMP- FLAT WASHER - SCREW	DISCLAIMER
	#10-32 SCREW 2 8	SCREW 2 & 5 UL-489 LISTED TUV & VDE CERTIFIED	.02-50	LOCK WASHER - FLAT WASHER - SCREW	MANUFACTURER RESERVES THE RIGHT TO CHANGE PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.	
			TUV & VDE CERTIFIED	.02-16	SADDLE CLAMP- FLAT WASHER - SCREW	
			TUV & VDE CERTIFIED	16.1-50	LOCK WASHER - FLAT WASHER -SCREW	
	1			1		I and the second

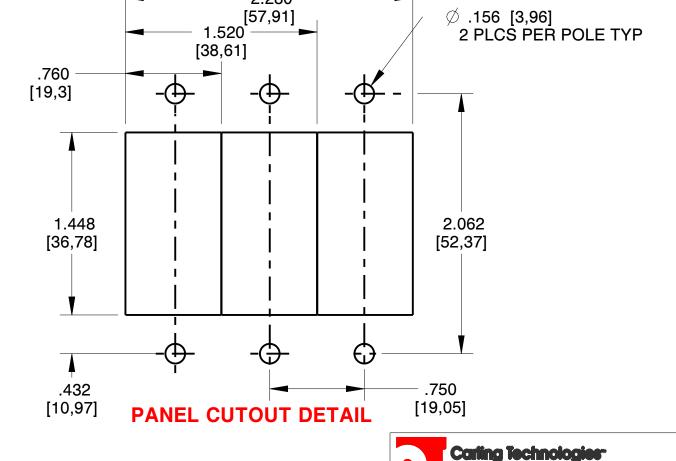

DRAWING FILE NO.

REV

Innovative Designs. Powerful Solutions.

60 JOHNSON AVE PLAINVILLE, CT 06062, USA PHONE: (860) 793-9281 SALES: SALES@CARLINGTECH.COM APPLICATION SUPPORT: TEAM2@CARLINGTECH.COM

C-SERIES **CIRCUIT BREAKER**

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS: IN [MM] TOLERANCES: ± .020 [0.51] DRAWING FILE NO. SIZE

CA3-B0-34-620-121-C

PRODUCT SERIES: C-SERIES C.B. | SHEET 1 OF 1