THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity ALL RIGHTS RESERVED.

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | H | REVISED PER OG3B-0188-05 | 4/22/05 | SS | GS |
| | H1 | REVISED PER ECO-09-020935 | 11SEP09 | KK | AEG |
| | J | REVISED PER ECO-17-011181 | 03AUG2017 | RS | MZ |
| | K | REVISED PER ECO-18-000439 | 19JAN2018 | RS | MZ |

NOTES:

1 MATES WITH PLUG 207019-1.

2 CIRCUITS 1 THUR 8 COMMONED, 9 THRU 16 COMMONED, 17 THRU 24 COMMONED, 25 THRU 32 COMMONED AND 33 THRU 36 COMMONED TOGETHER.

3 ALL CURCUITS COMMONED TOGETHER.

4 TIN-LEAD OVER NICKEL PER QQ-N-290 OR COPPER PER MIL-C-14550.

5 0.76 µm (.000030) MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 5.08 (.200) FROM MATING END, 3.81 µm (.000150) MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 4.83 (.190) MIN. FROM OPPOSITE END, BOTH OVER 1.27 µm (.000050) MIN NICKEL PER QQ-N-290.

6 TIN OVER NICKEL PER QQ-N-290 OR COPPER PER MIL-C-14550.

7 0.76 µm (.000030) MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 5.08 (.200) FROM MATING END, 3.81 µm (.000150) MIN TIN PER MIL-T-10727 FOR A LENGTH OF 4.83 (.190) MIN. FROM OPPOSITE END, BOTH OVER 1.27 µm (.000050) MIN NICKEL PER QQ-N-290.

8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

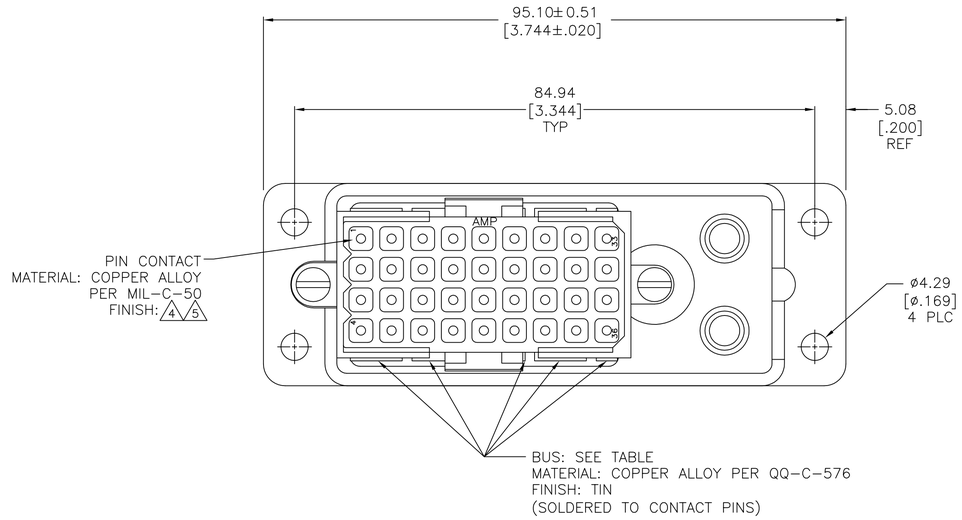


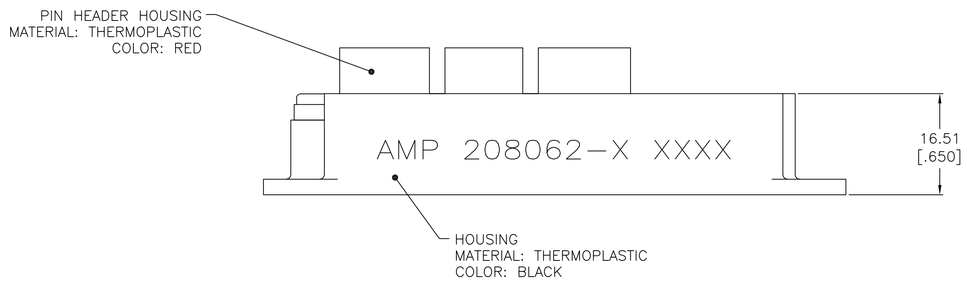




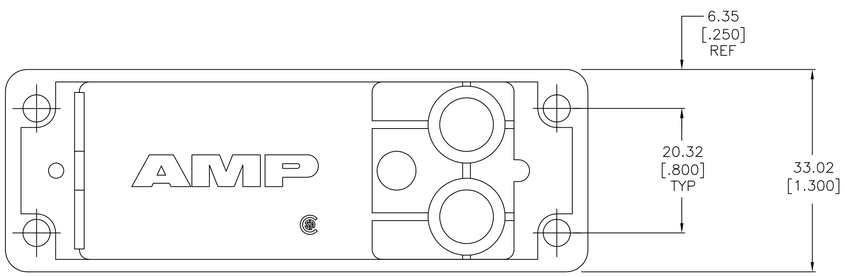


| | FINISH | BUS TYPE | PART NO. |
|---|---|---|---|
| 8 OBSOLETE | 7 | (1) 36 POSITION 3 | 1-208062-1 |
| | 7 | (1) 4 POSN AND (4) 8 POSN 2 | 1-208062-0 |
| | 6 | (1) 36 POSITION 3 | 208062-9 |
| | 6 | (1) 4 POSN AND (4) 8 POSN 2 | 208062-8 |
| OBSOLETE | 5 | (1) 36 POSITION 3 | 208062-7 |
| | 5 | (1) 4 POSN AND (4) 8 POSN 2 | 208062-6 |
| | 4 | (1) 36 POSITION 3 | 208062-3 |
| OBSOLETE | 4 | (1) 4 POSN AND (4) 8 POSN 2 | 208062-1 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.25[.010]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE CALLOUTS
FINISH: SEE CALLOUTS

DWN D.GELTZ 08/13/92
CHK R.STONE 9-21-92
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity Ltd.

NAME: COMMONING DEVICE ASSEMBLY, 36 POSITION, METRIMATE

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-208062 | – |

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV K

4805 (1/15)