

USER MANUAL

HDMI Audio Extractor

Model #: 33-12740

INTRODUCTION

Thank you for purchasing this Stellar Labs product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Our selection of HDMI Converter, switches, extenders, matrices and splitters are designed to make your AV device use more convenient, comfortable, productive and cost-efficient.

This unit is an HDMI audio extractor, and is capable of extracting the audio from an HDMI source and providing both a digital coaxial and a Toslink audio output.



Our devices offer solutions for noise, space, security concerns, data center control, information distribution, conference room presentations, schools, and corporate training environments.

FEATURES

- Digital audio output format support : LPCM2.0/DTS/Dolby-AC3
- 192 KHz sampling rate.
- Utilizes optical fiber cable for loss less than 0.2db/m. Output distance is up to 100'.
- Utilizes standard coaxial cable output can be up to 10m.
- Installs in minutes.

Contents:

1. HDMI Audio Extractor 1 piece
2. SV power adapter 1 piece
3. User manual 1 piece

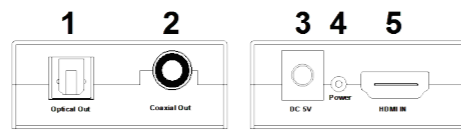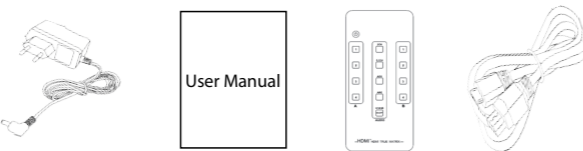

1. Toslink output port
2. Coaxial output port
3. DC Power port
4. Power indication LED
5. HDMI input ports

SPECIFICATIONS

HDMI input audio format.....	LPCM2.0/DTS/Dolby-AC3
Digital audio output format.....	LPCM2.0/DTS/Dolby-AC3
Optical fiber cable output distance.....	30m(Use the optical fiber cable loss less the 0.2Db/m)
Coaxial cable output distance.....	≤10m(Use the standard coaxial cable)
Max working current.....	300mA/5V
DC Operating Temperature range.....	(0 to +40 °C)
Operating Humidity range.....	5 to 85%RH (No Condensation)
Storage Temperature range.....	(-10 to +55 °C)
Storage Humidity range.....	0 to 90%RH (No Condensation)
Dimension (L x W x H).....	2.1" x 1.9" x .8"
Weight.....	3 oz

IR Remote Functions



- Pull out the plastic film that is inserted into the rear of remote board
- The A and B buttons represent the A and B outputs
- ARC/ARC Function On/Off Key(only the HDMI output A port supports ARC function).
- SPDIF: SPDIF and headphone audio ON/OFF switch
- 2CH: 2 channel stereo mode.
- 5.1CH: 5.1 channel mode.
- ADV: Advance Audio model

Notes:

- Please use this device as the instructions have described to improve the longevity and safety of the unit.
- 1.The unit should be placed in a location away from damp, high-temperature, dusty, erosive, and oxidative conditions.
 - 2.Please hold the power adapter head and do not pull the power cord when disconnecting from the socket.
 - 3.Please turn the power off when the unit is not being used for long time.
 - 4.Please use the original factory power adapter.

Troubleshooting

Issue	Cause and Ways to deal with
No Power	<ol style="list-style-type: none"> 1. Make sure the power plug is inserted securely into the unit. 2. Check the power source to make sure it is connected to an outlet.
No Picture	<ol style="list-style-type: none"> 1. Make sure the monitor is on and connected to the unit. 2. Make sure the source is on and connected to the unit. 3. Check all connections to make sure they are secure. 4. Connect the source to the monitor to see if the issue with your other components. 5. Inspect your HDMI cable for damage.
Obscure Picture	<ol style="list-style-type: none"> 1. Connect the source to the monitor to see if the issue with your other components. 2. Inspect your HDMI cable for damage.
Remote Not Working	<ol style="list-style-type: none"> 1. Make sure the plastic tab is removed from the battery compartment. 2. Make sure the battery has a charge.

Warranty

This device is warranted against manufactures defects for a period of one year from the date of purchase from the dealer. This warranty extends solely to the repair or replacement of this product and does not cover additional costs, including but not limited to installation or removal of the product or any incidental or consequential damages. Nor does it cover damage due to improper use, storage or application of this device. Should a service issue arise within the one year period, please contact the dealer in which this device was purchased. It will be the sole decision of Stellar Labs to repair or replace any device found to be defective during this period.