

3 In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
△	△						△					
△	△						△					
△	△						△					

Fig.1 : RECOMMENDED PATTERN

Fig.2 : PLATING SPECIFICATION (40:1)




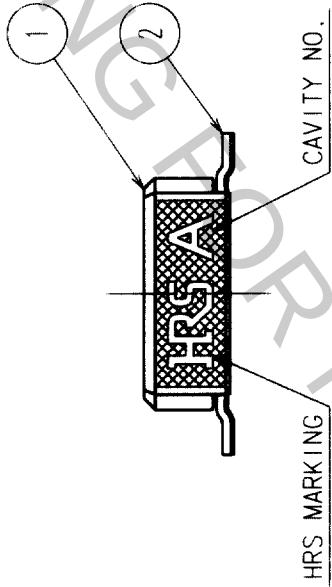


Fig.3 : A-A CROSS SECTION VIEW

Fig.4 : MATING VIEW

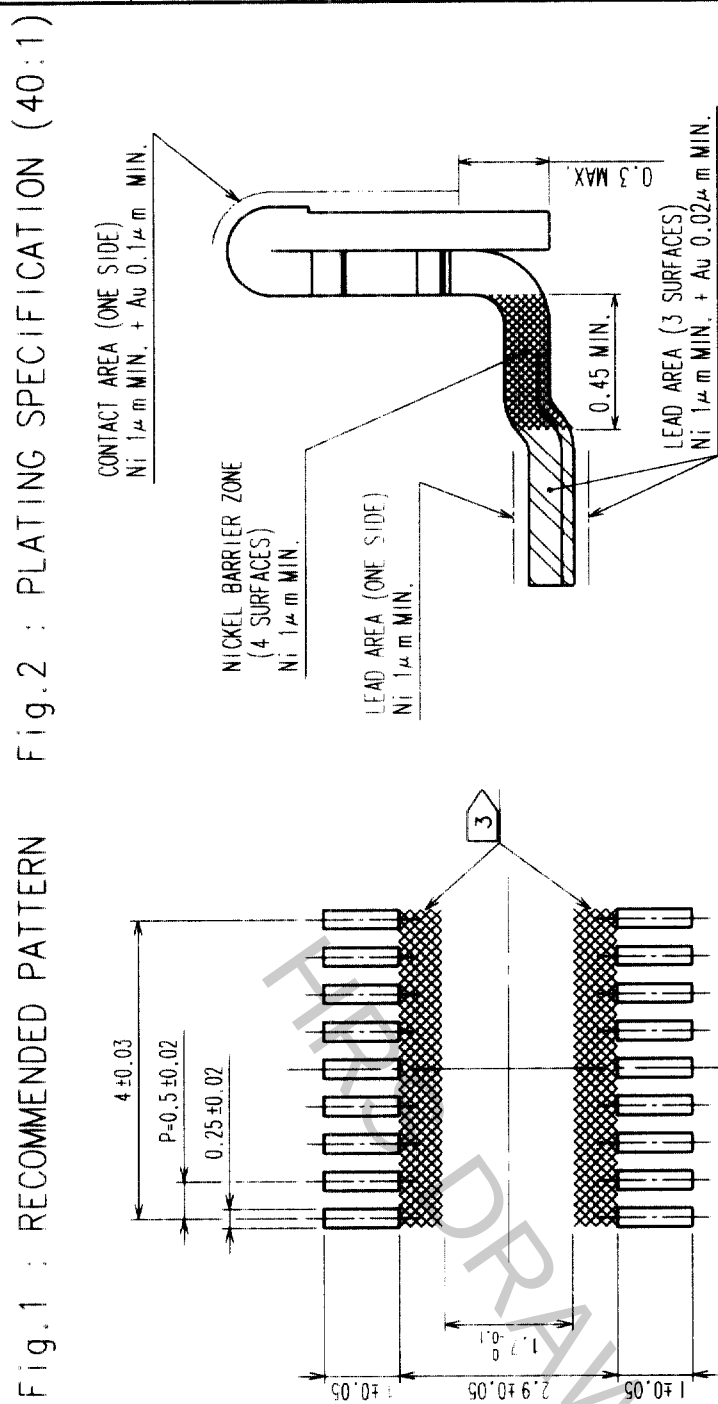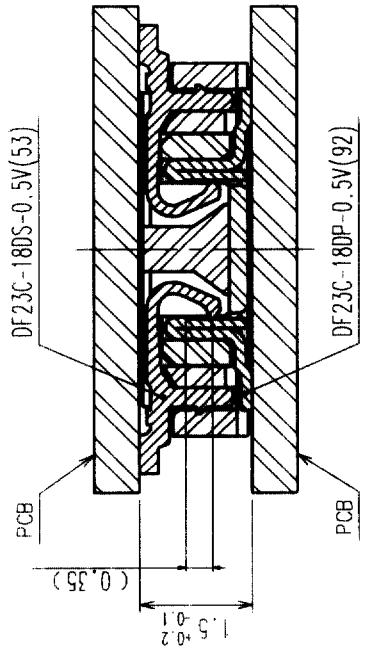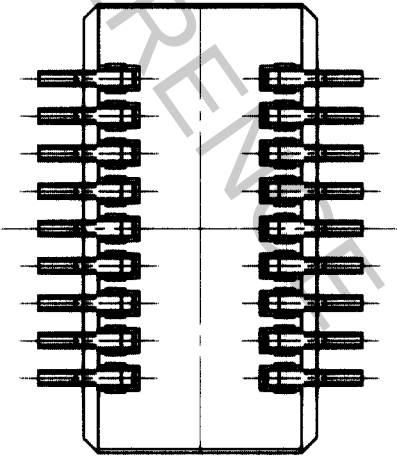

NOTES 1 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

2 REFER TO Fig.2

3 WHEN A PART MARKED WITH HAS A PATTERN BUT NO RESIST ON IT, TAKE CARE TO PREVENT THE CONNECTOR FROM TOUCHING IT.

2	PHOSPHOR BRONZE	2	4	POLYESTER	CLEAR
1	LOP	3	3	PS	CLEAR
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		T. Yamamoto	T. Yamamoto	K. Hayama	K. Hayama
		'03.10.1	'03.10.2	'03.10.2	'03.10.2
DRAWING NO.		PART NO.		FINISH, REMARKS	
EDC3-164161-04		DF23C-18DP-0.5V(92)			
SCALE		CODE NO.			
10 : 1		CL688-0808-7-92			
UNITS					
mm					

5	6	7	8
5	6	7	8
5	6	7	8
5	6	7	8

