


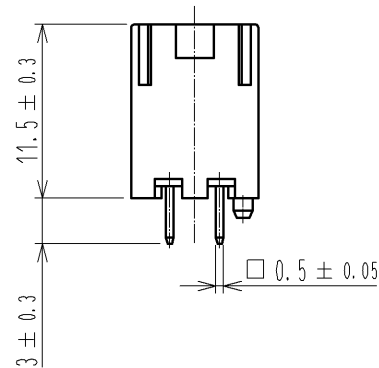



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

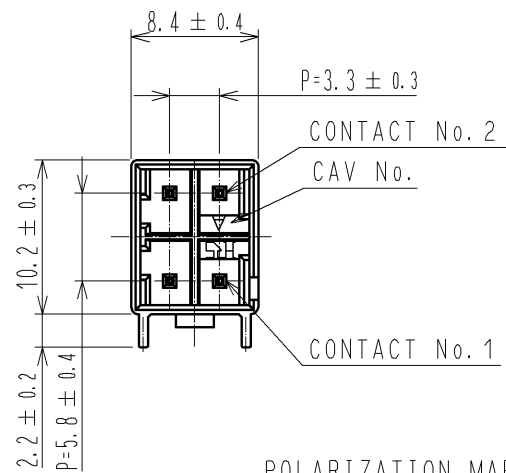


POLARIZATION MARK

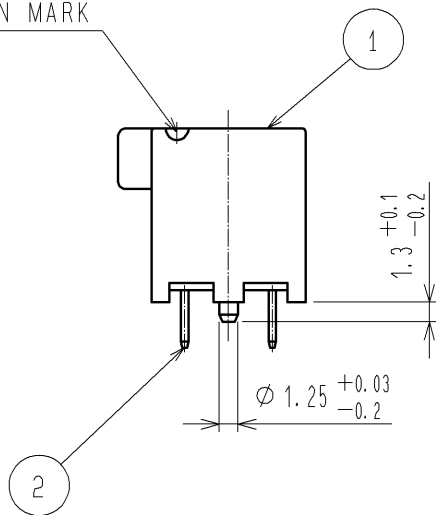

APPLICATION DIAGRAM

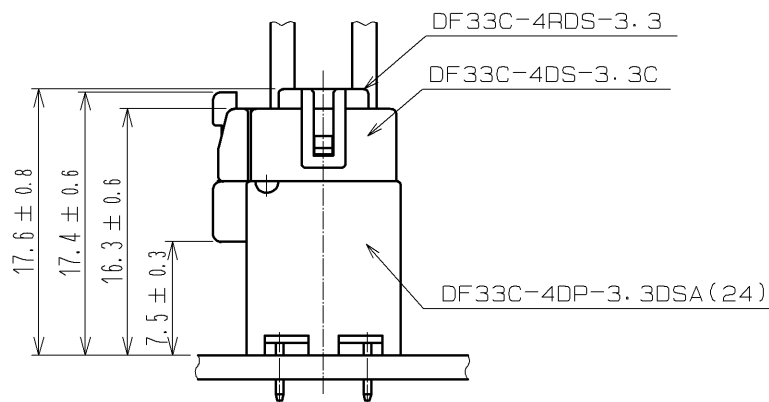


RECOMMENDED PATTERN(5:1)
(RECOMMENDED BOARD THICKNESS t=1.6mm)

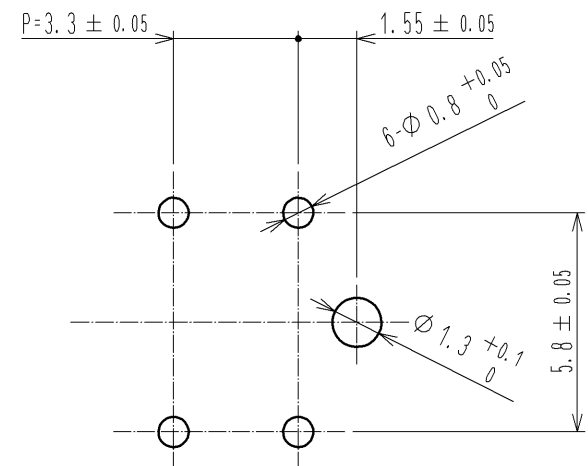

NOTES 1 :IMMERSION DEPTH INTO POTTING SOLUTION:6.5mm

		3	HIPS	TRAY
		2	BRASS	SURFACE:TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min
1	PBT	WHITE, UL94V-0		
NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS
		DESIGNED	CHECKED	DATE
		APPROVED : KI. AKIYAMA	12. 07. 26	DRAWING NO. EDC3-338387-01
		CHECKED : HK. UMEHARA	12. 07. 26	PART NO. DF33C-4DP-3. 3DSA(24)
		DESIGNED : HT. SATO	12. 07. 26	CODE NO. CL676-1113-0-24
		DRAWN : MI. SAKIMURA	12. 07. 26	1/2

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

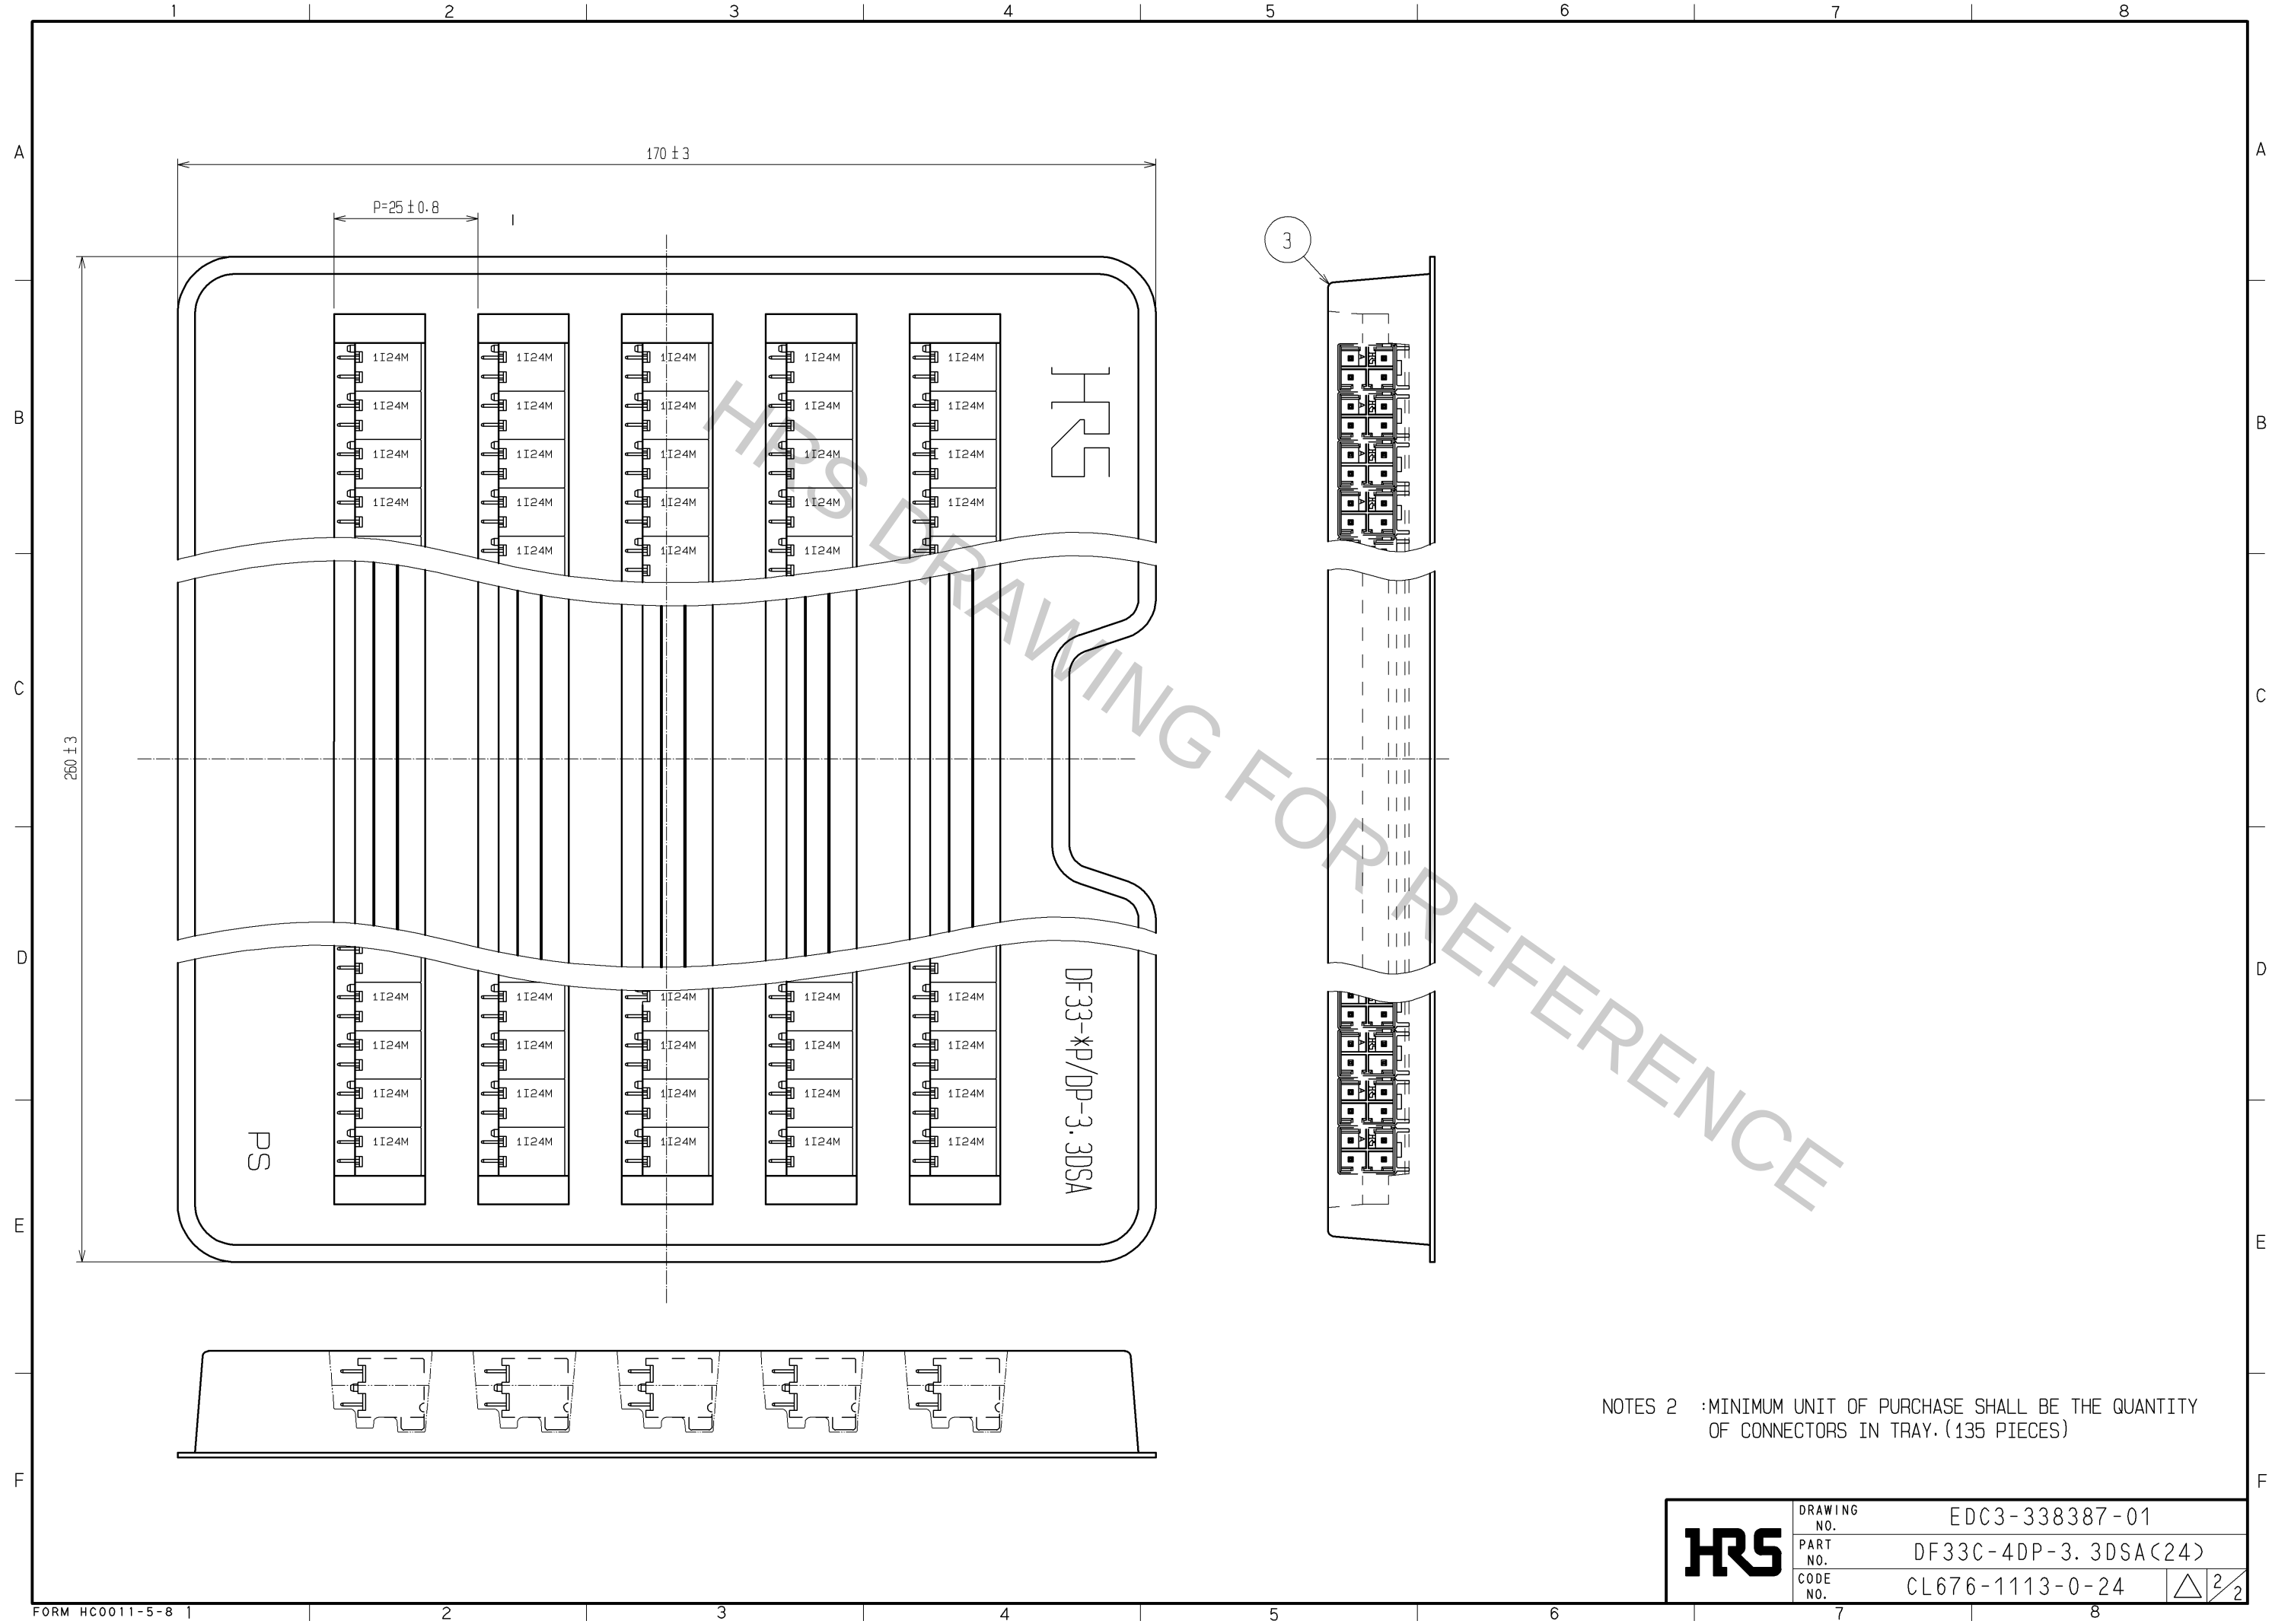

NOTES 2 :MINIMUM UNIT OF PURCHASE SHALL BE THE QUANTITY
OF CONNECTORS IN TRAY.(135 PIECES)

HRS	DRAWING NO.	EDC3-338387-01	
	PART NO.	DF33C-4DP-3. 3DSA(24)	
	CODE NO.	CL676-1113-0-24	△2/2