

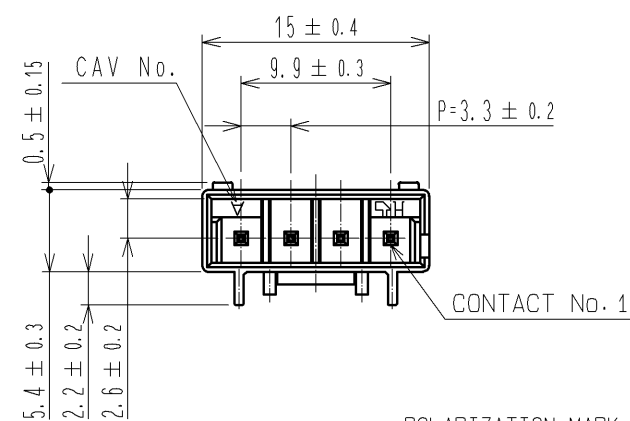
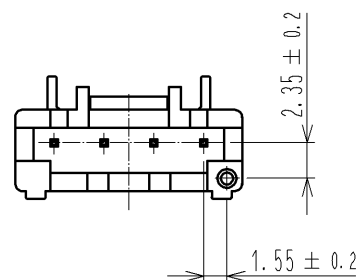




Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

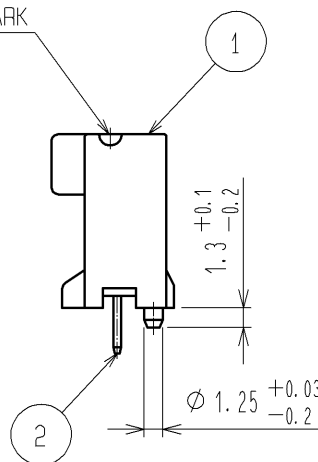


POLARIZATION MARK

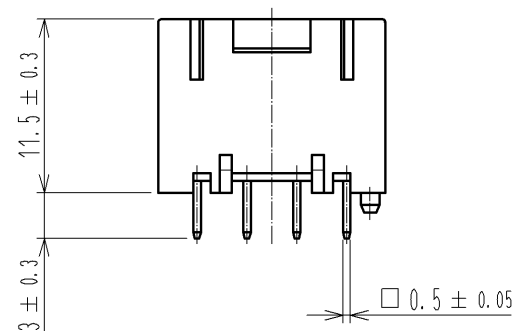

APPLICATION DIAGRAM

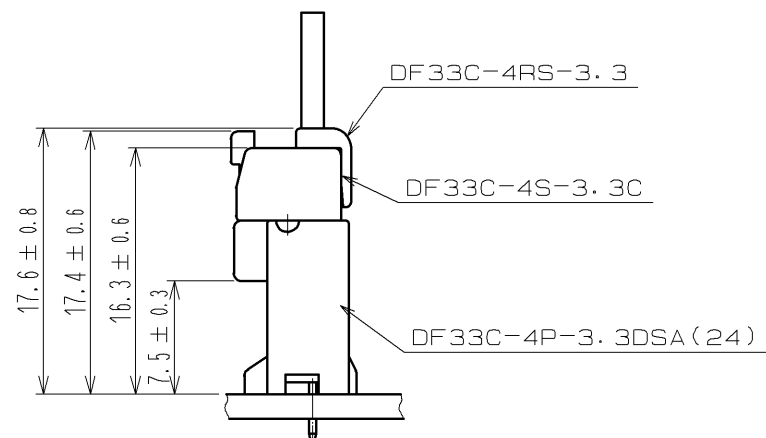


RECOMMENDED PATTERN(5:1)
(RECOMMENDED BOARD THICKNESS t=1.6mm)

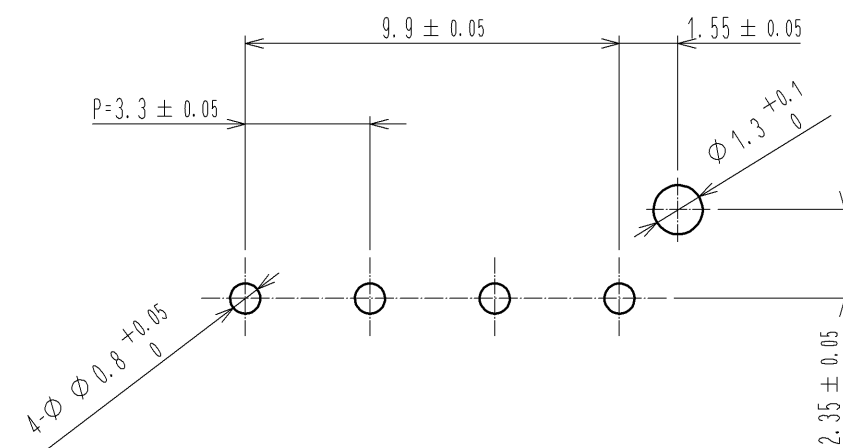

NOTES 1 :IMMERSION DEPTH INTO POTTING SOLUTION:6.5mm

1			3		
PBT			HIPS		
WHITE, UL94V-0			TRAY		
2			BRASS		
SURFACE:TIN PLATED 1µm min			UNDER PLATING:NICKEL PLATED 0.5µm min		
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS	mm	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED
2 : 1	△	APPROVED : KI. AKIYAMA	13. 08. 23	DRAWING NO.	EDC3-338422-01
HIROSE ELECTRIC CO., LTD.			13. 08. 23	PART NO.	DF33C-4P-3.3DSA(24)
DESIGNED : HT. SATO			13. 08. 23	CODE NO.	CL676-1133-8-24
DRAWN : MI. SAKIMURA			13. 08. 23	1/2	

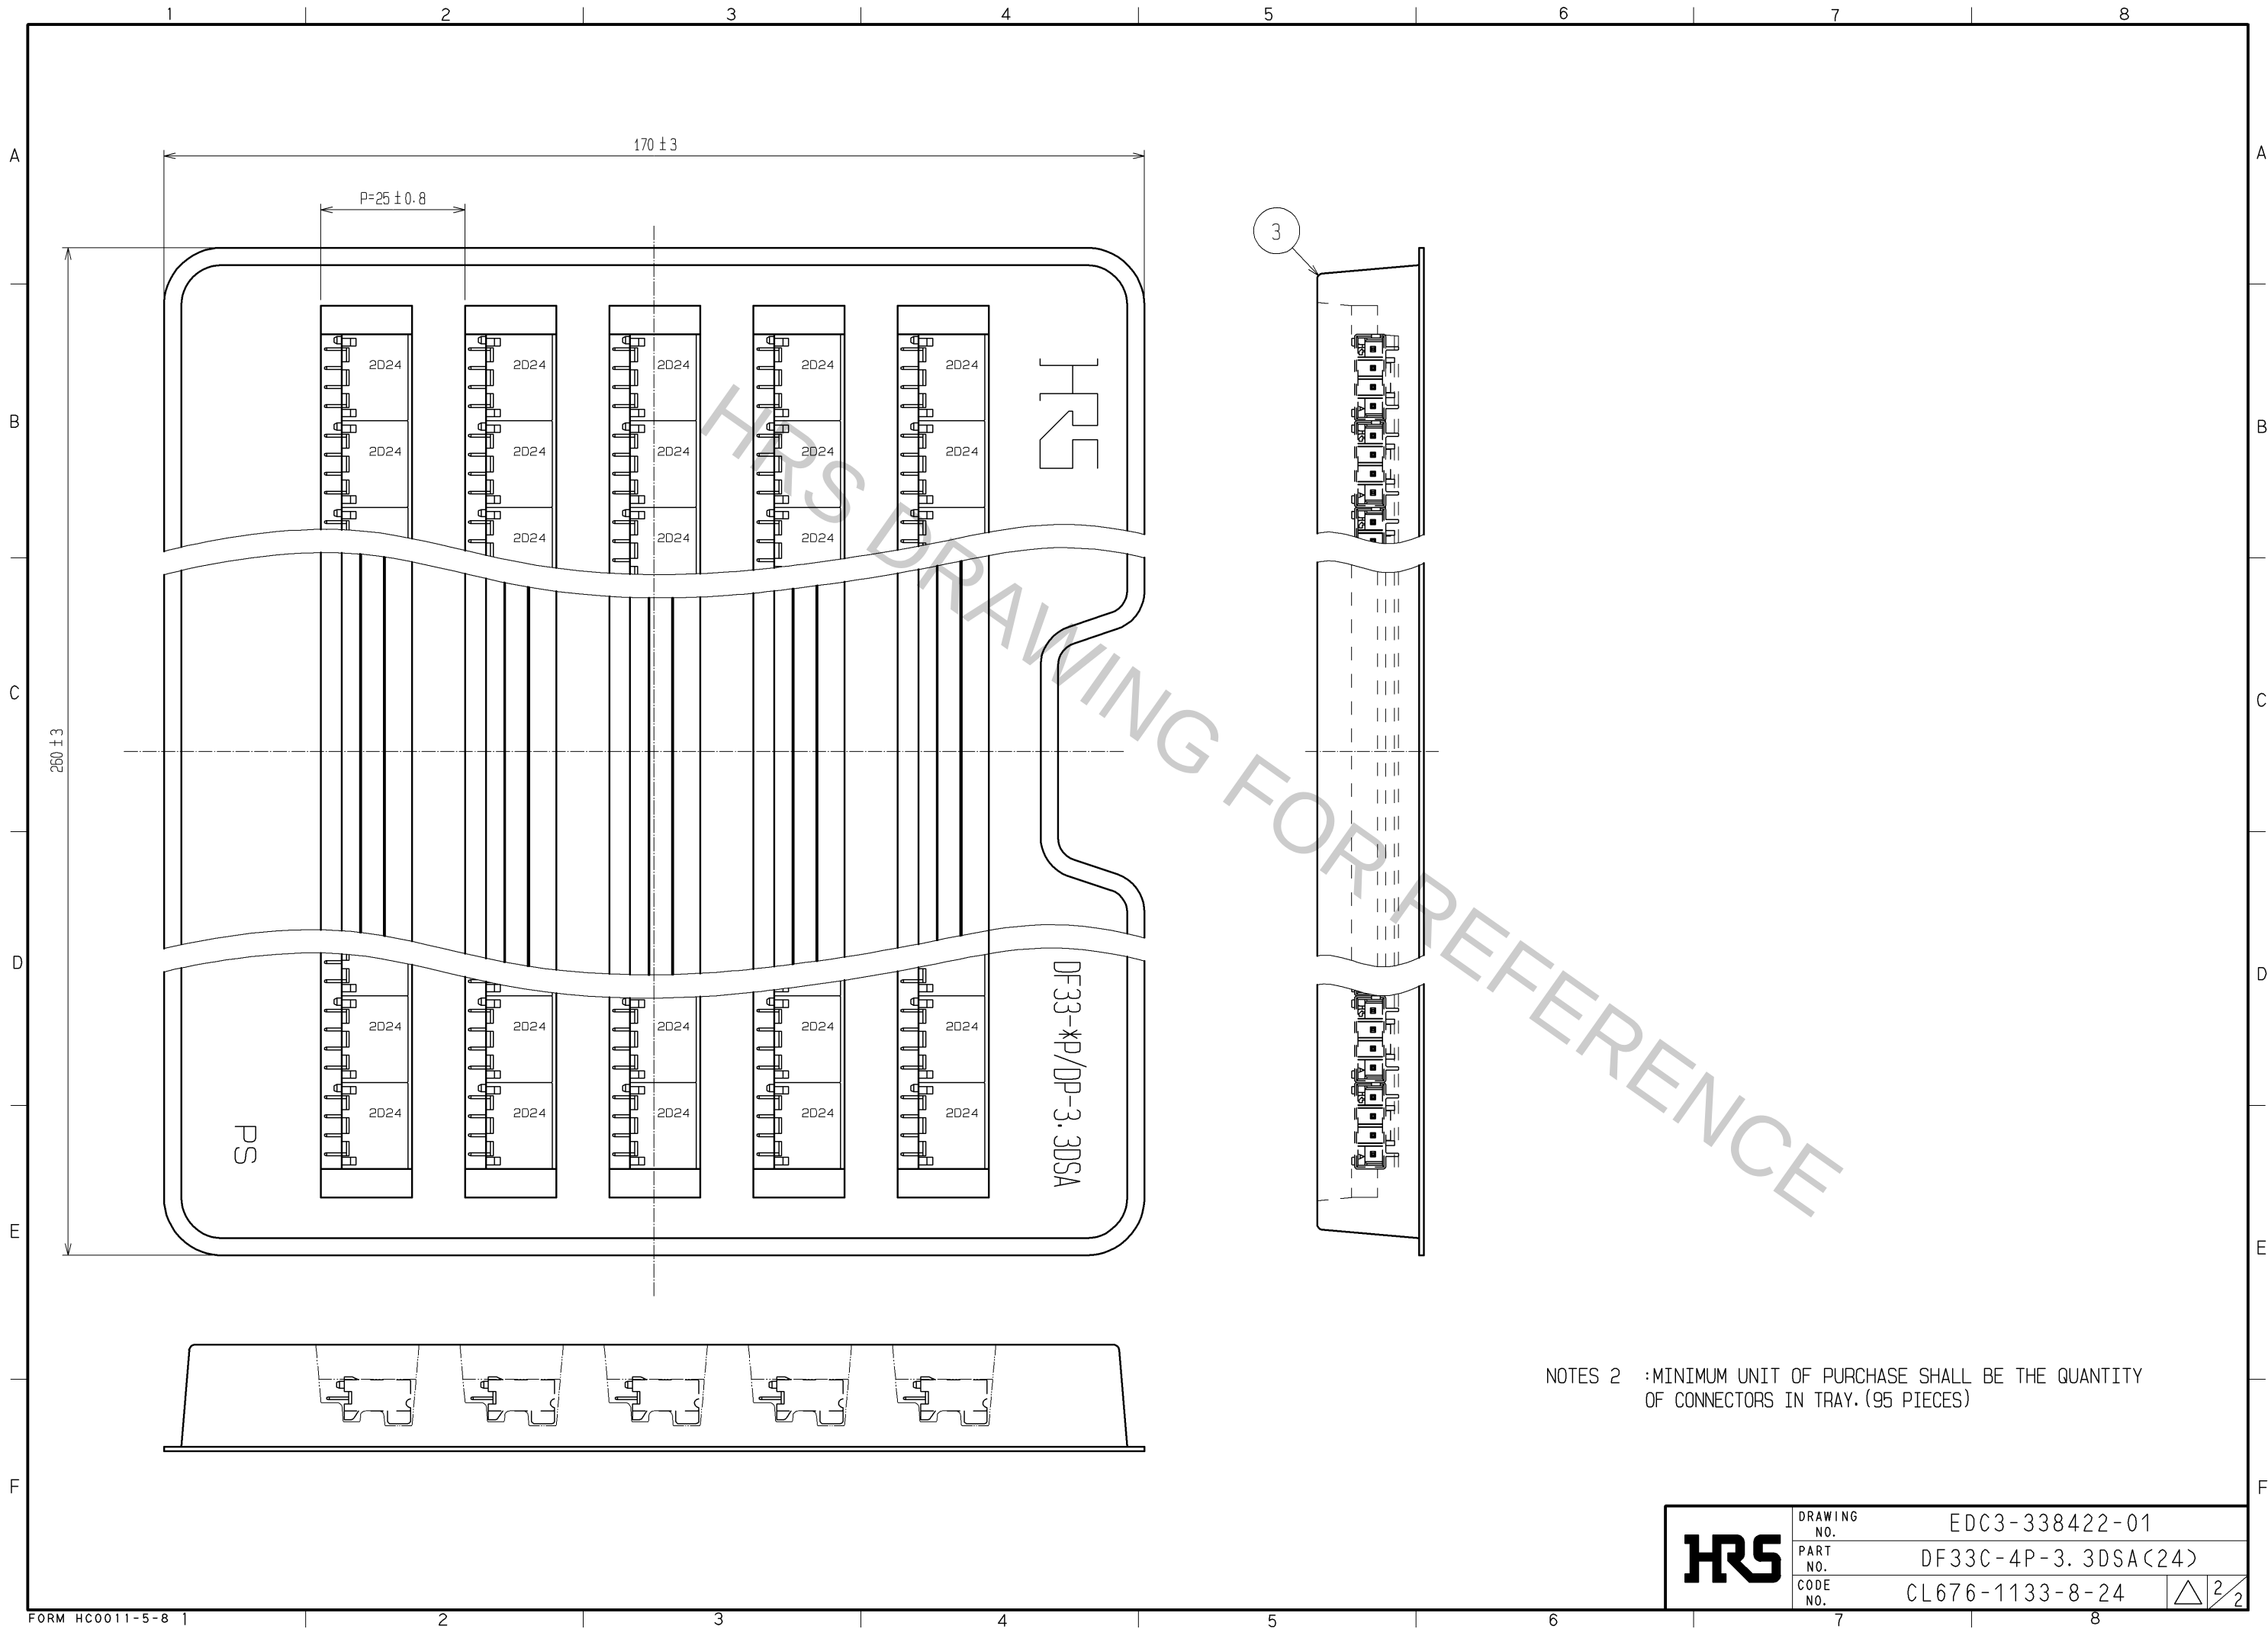

HRS	DRAWING NO.	EDC3-338422-01	
	PART NO.	DF33C-4P-3, 3DSA(24)	
	CODE NO.	CL676-1133-8-24	2/2