

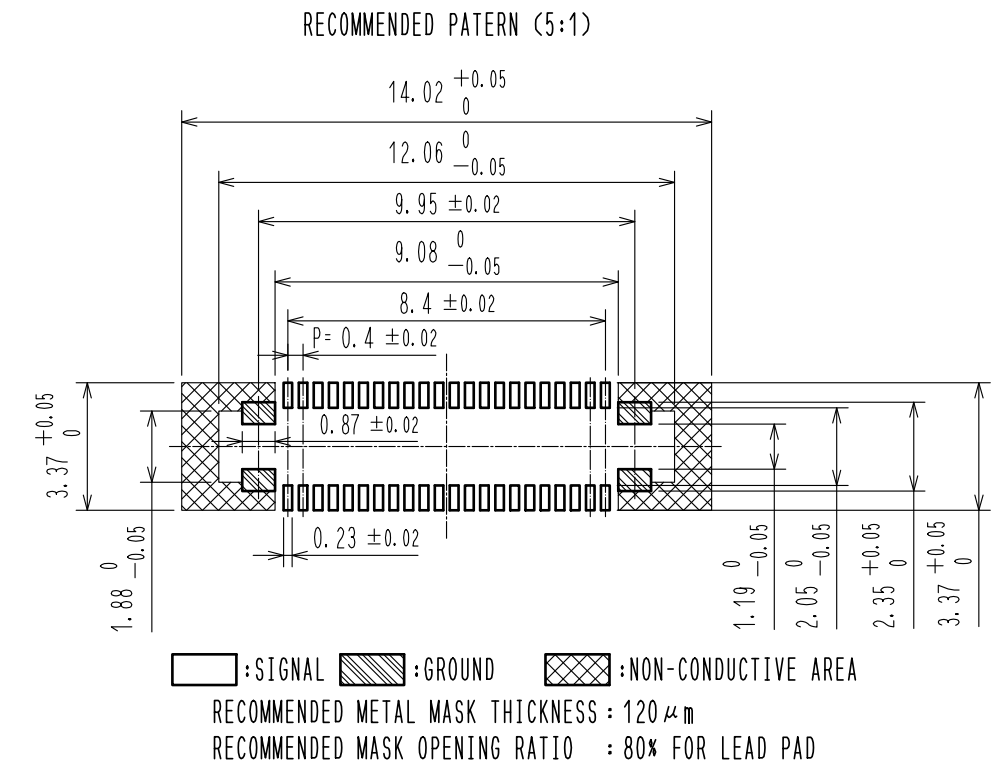



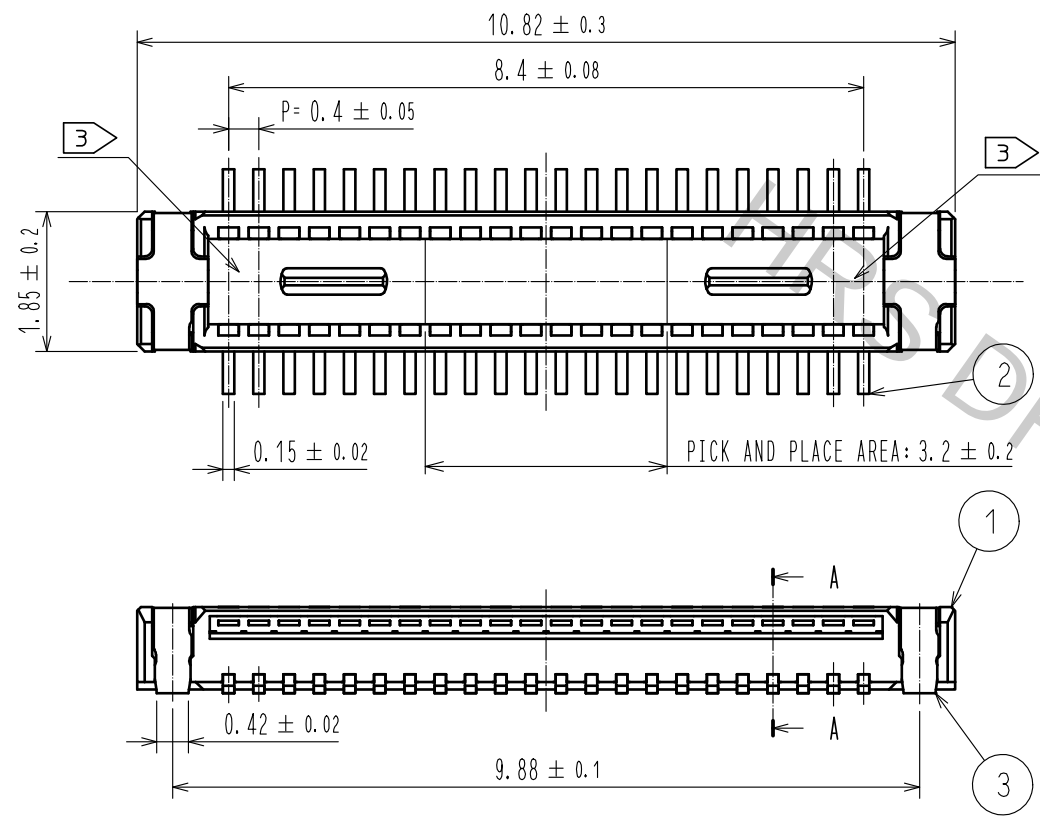

- NOTES
1. ALL LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 2. PLATING SPECIFICATIONS
CONTACT AREA : GOLD $0.05 \mu\text{m}$ MIN
SMT LEAD : GOLD $0.05 \mu\text{m}$ MIN
UNDER PLATING : NICKEL $1 \mu\text{m}$ MIN
(SURFACE : SEALING)
 3. HRS MARK AND CAV No. ARE INDICATED IN APPROX POSITION SHOWN.

3	STAINLESS STEEL		7	PS	CLEAR(REINFORCEMENT COLLAR)			
2	PHOSPHOR BRONZE		6	PS	BLACK(PLASTIC REEL)			
1	LCP	BLACK , UL94 V-0	5	POLYESTER	CLEAR(COVER TAPE)			
			4	PS	CLEAR(EMBOSSED CARRIER TAPE)			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 10 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. ISHIDA	15.07.28	DRAWING NO. EDC-355294-58-01				
		CHECKED : WR. FUKUCHI	15.07.28	PART NO. DF40GL-44DP-0.4V(58)				
		DESIGNED : SJ. WADA	15.07.27	CODE NO. CL684-4412-2-58				
		DRAWN : KR. AJITO	15.07.27	1/2				

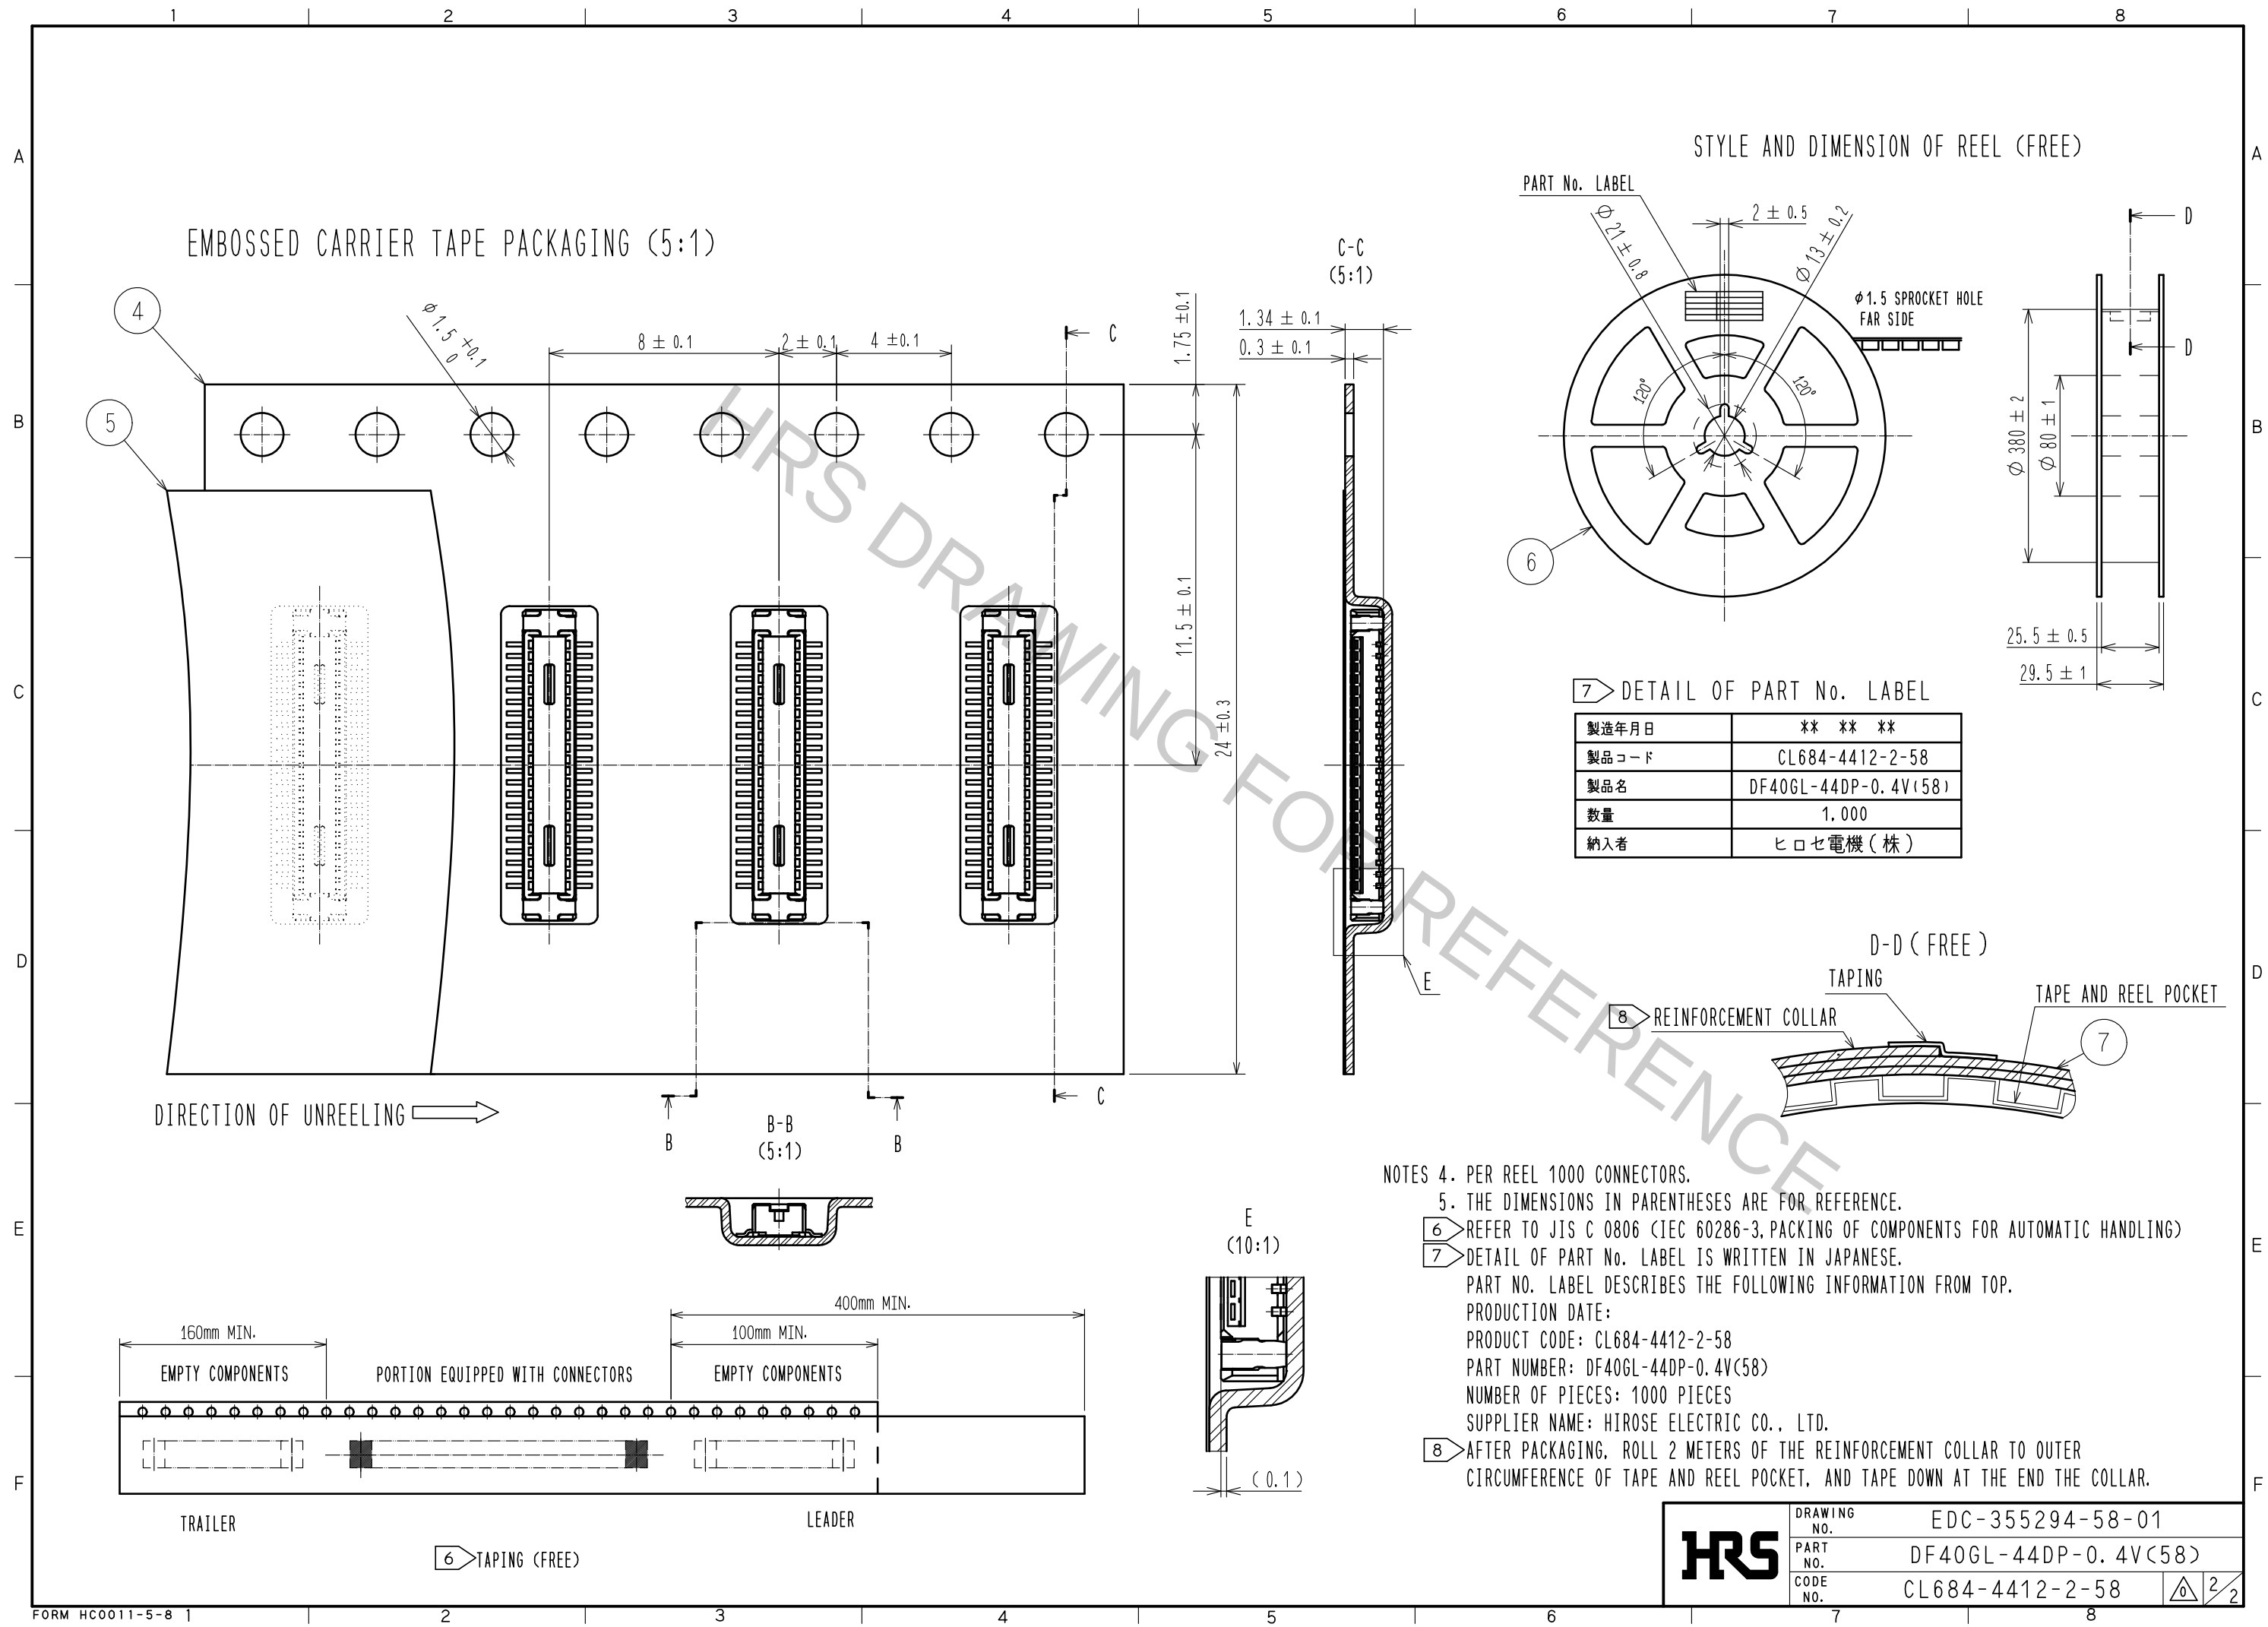

HRS

DRAWING NO.	EDC-355294-58-01
PART NO.	DF40GL-44DP-0.4V(58)
CODE NO.	CL684-4412-2-58

2/2