

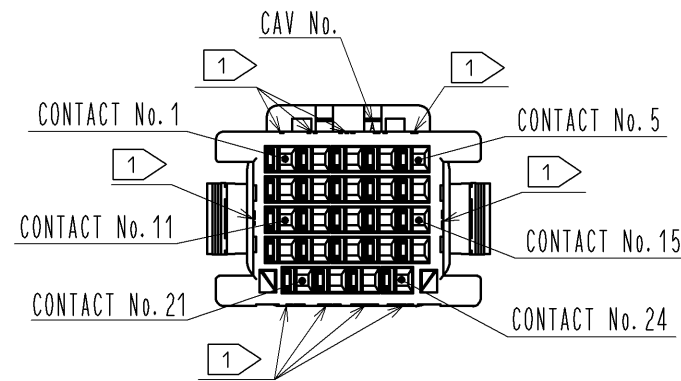
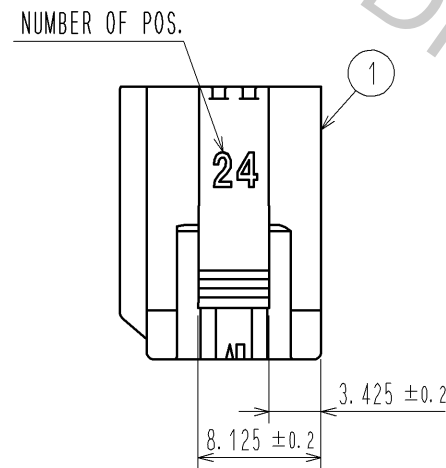
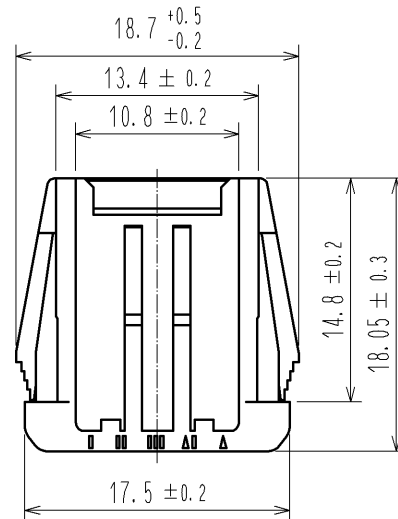



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

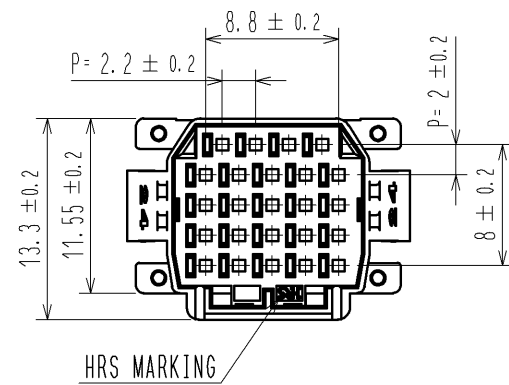


1> FIGURE-1 CONTACT No. MARKING (10:1)

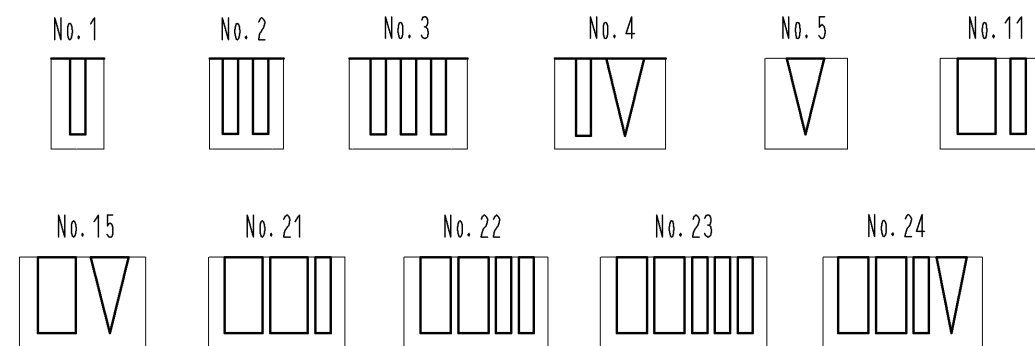


7> MATING FIGURE (PANEL MOUNTED)

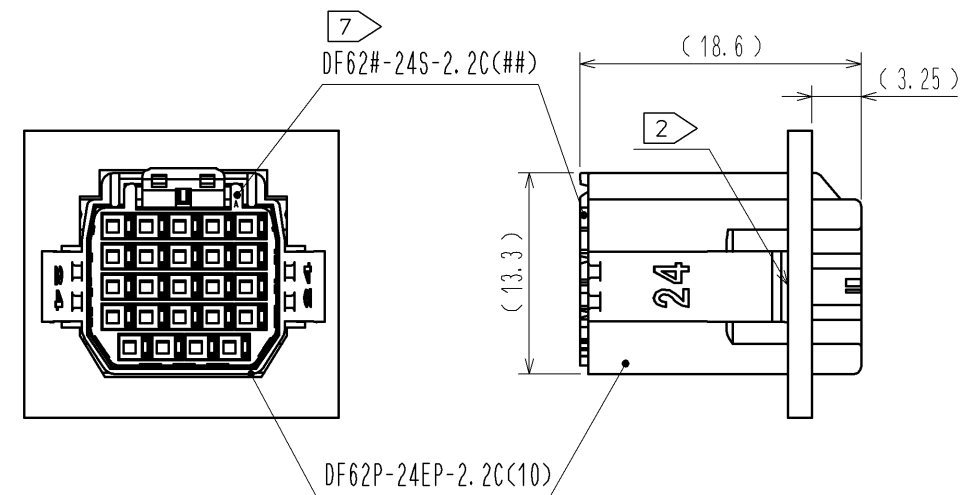

3> RECOMMENDED PANEL CUTOUT DIMENSION

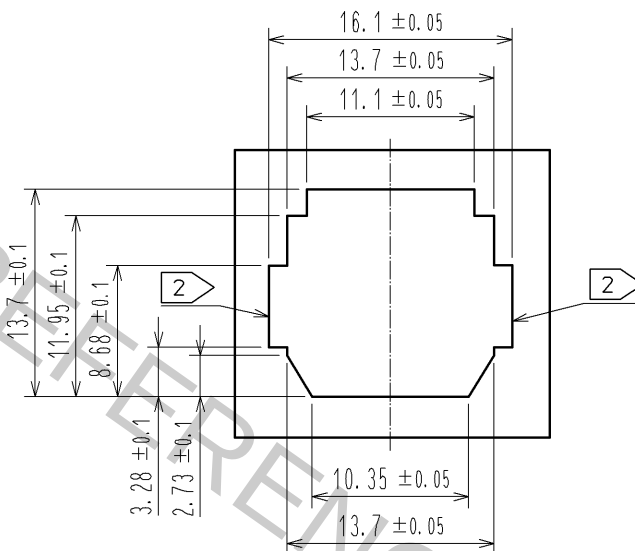

- NOTE. 1> MARKINGS AT THE INDICATED POSITIONS ARE CONTACT NO. MARKING. AND SHAPES ARE SHOWN IN FIGURE-1.
2> PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
3> APPLICABLE PANEL THICKENING IS 2.3 TO 0.5mm.
4> CONSULT HIROSE FOR THE OTHER PANEL CUTOUT DESIGNS THAN THE RECOMMENDED ONE.
5. PER PACK : 100 PIECES.
6. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
7> THIS FIGURE SHOWS THE MATED CONDITION WITH DF62B-24S-2.2C.

				1		PBT		UL94V-0<WHITE>										
NO.		MATERIAL		FINISH . REMARKS				NO.		MATERIAL		FINISH . REMARKS						
UNITS mm				SCALE 2 : 1				COUNT		DESCRIPTION OF REVISIONS			DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.				APPROVED : KI. AKIYAMA				14. 03. 10		DRAWING NO.		EDC3-349142-01						
				CHECED : HK. UMEHARA				14. 03. 10		PART NO.		DF62P-24EP-2. 2C<10>						
				DESIGNED : TS. KUMAZAWA				14. 03. 07		CODE NO.		CL544-0550-7-10						
				DRAWN : TS. KUMAZAWA				14. 03. 07				 1/1						