

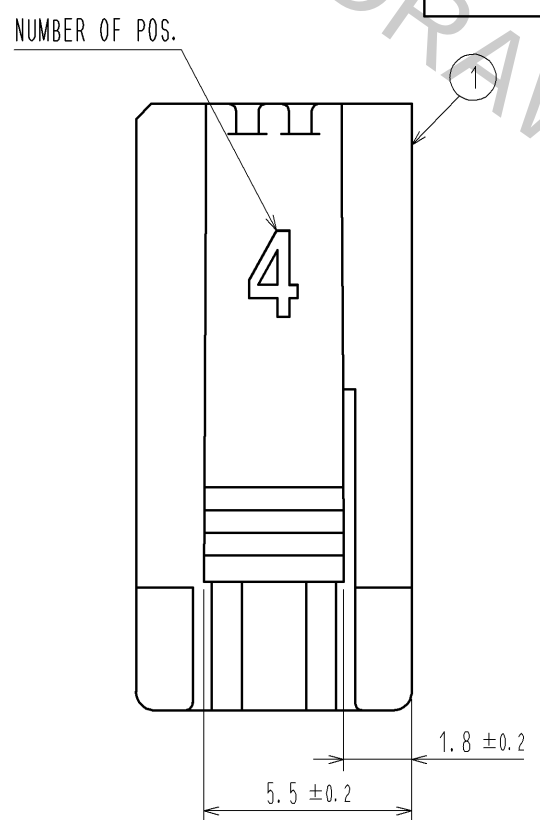
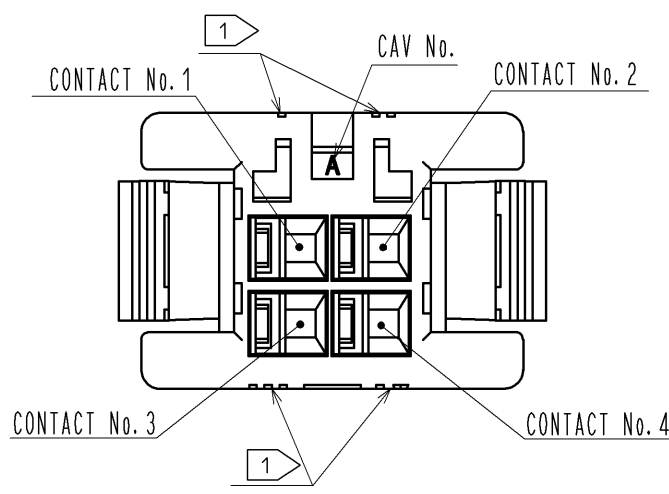
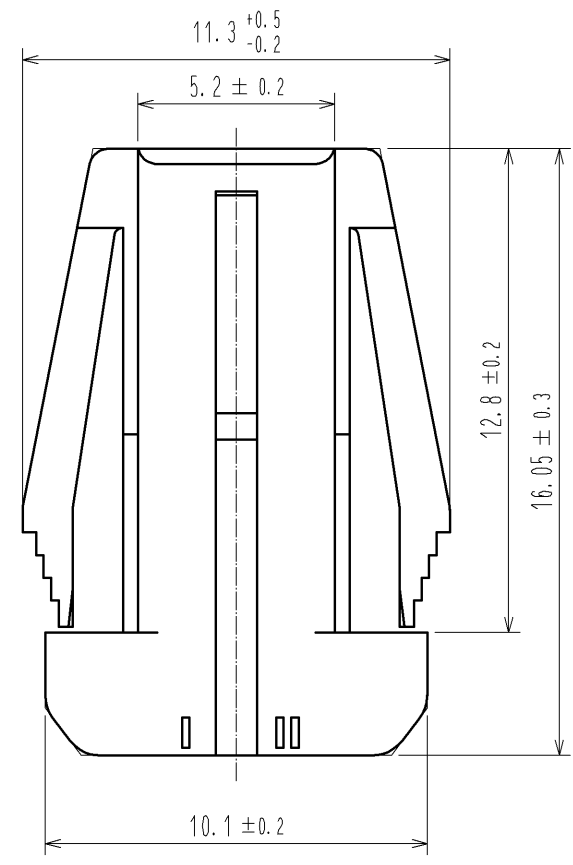



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

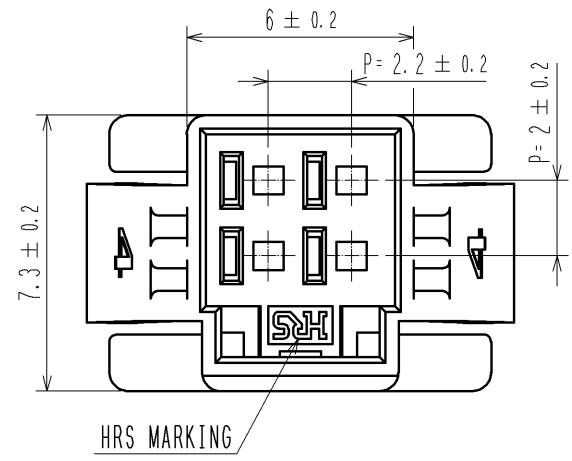


1 FIGURE-1 CONTACT No. MARKING (10:1)

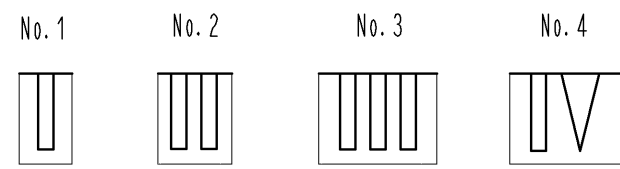


7 MATING FIGURE (PANEL MOUNTED)

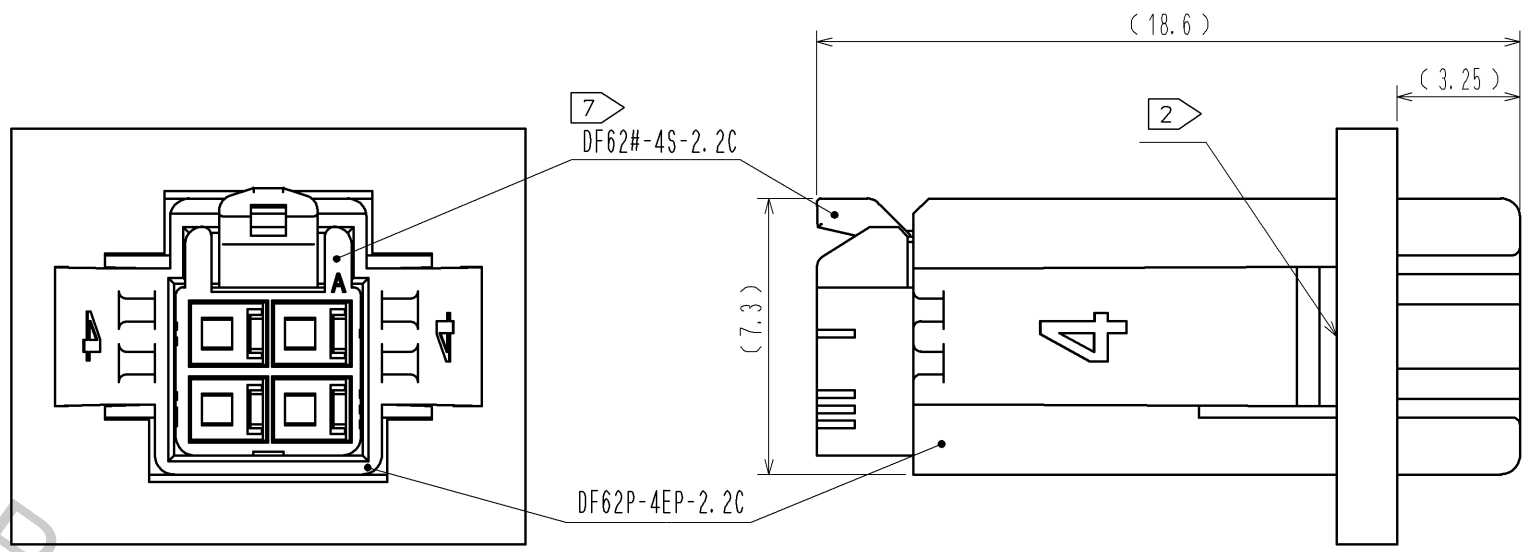

3 4 RECOMMENDED PANEL CUTOUT DIMENSION

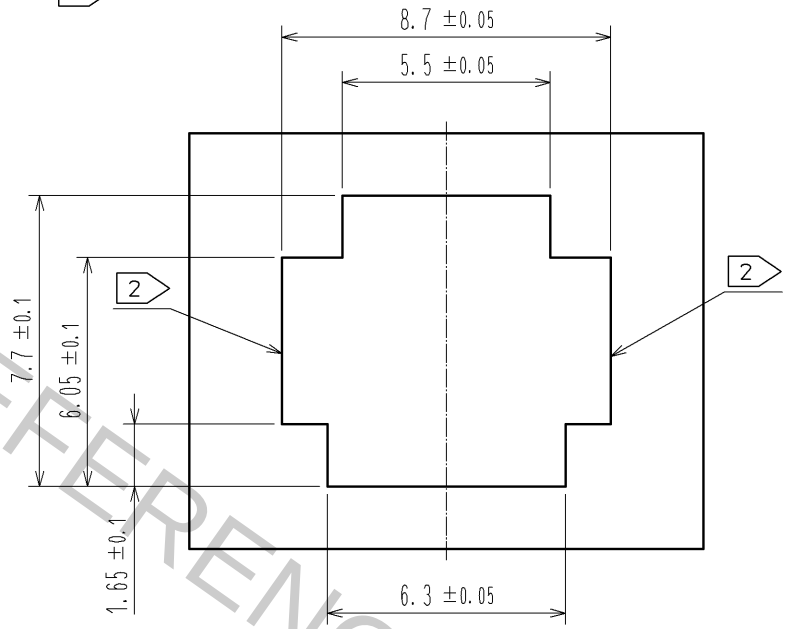

- NOTE. 1 MARKINGS AT THE INDICATED POSITIONS ARE CONTACT NO. MARKING, AND SHAPES ARE SHOWN IN FIGURE-1.
2 PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
3 APPLICABLE PANEL THICKNESSING IS 2.3 TO 0.5mm.
4 CONSULT HIROSE FOR THE OTHER PANEL CUTOUT DESIGNS THAN THE RECOMMENDED ONE.
5. PER PACK : 100 PIECES.
6. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
7 THIS FIGURE SHOWS THE MATED CONDITION WITH DF62B-4S-2.2C.

NO.		MATERIAL	FINISH . REMARKS		1	PBT	UL94V-0(BLACK)			
UNITS mm			SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO. , LTD.		APPROVED : KI. AKIYAMA		13. 12. 26		DRAWING NO.		EDC3-349137-00		
		CHECED : OM. MIYAMOTO		13. 12. 26		PART NO.		DF62P-4EP-2. 2C		
		DESIGNED : TH. YOSHIZAWA		13. 12. 26		CODE NO.		CL544-0545-7-00		
		DRAWN : MI. SAKIMURA		13. 12. 25				 1 1		
5		6		7		8				