



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

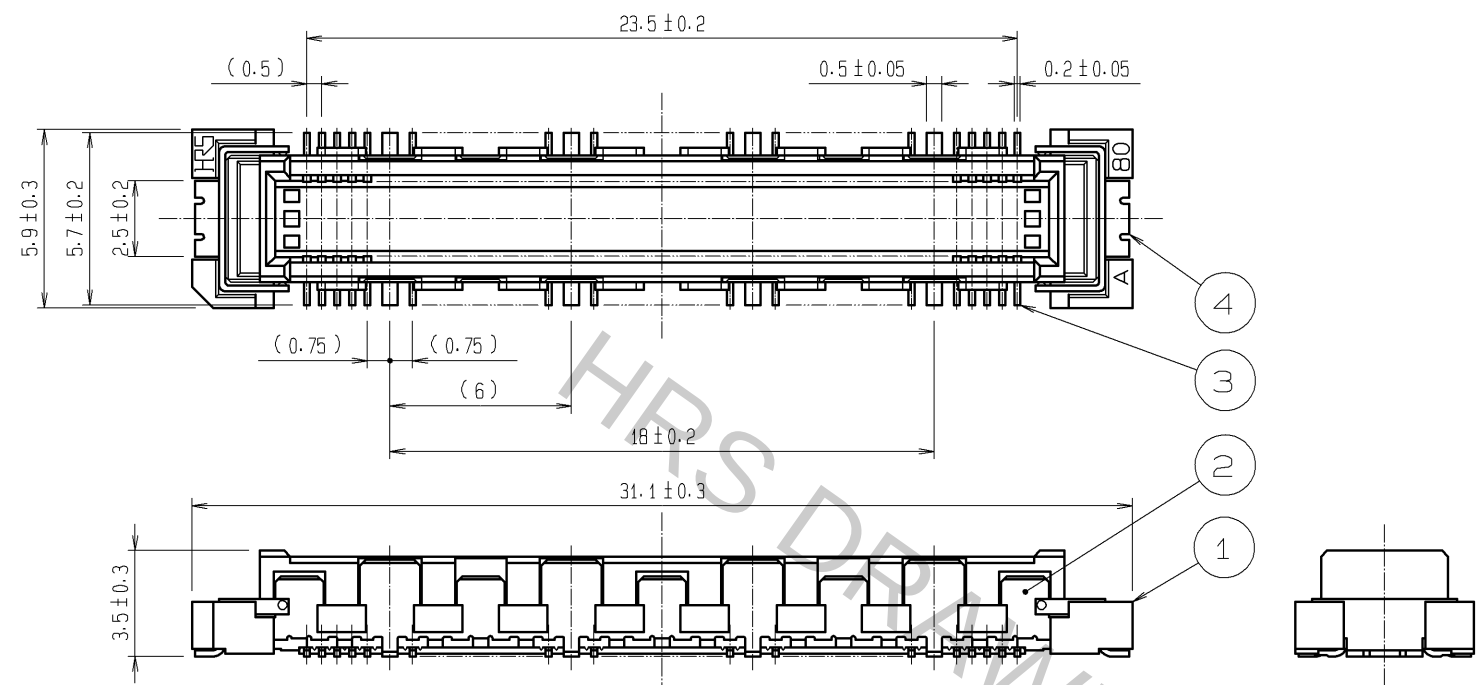


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)


CROSS CUT SECTION - SIGNAL (5:1)

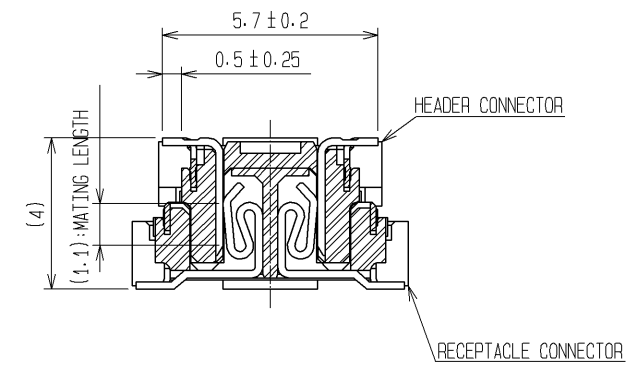

CROSS CUT SECTION - GROUND (5:1)

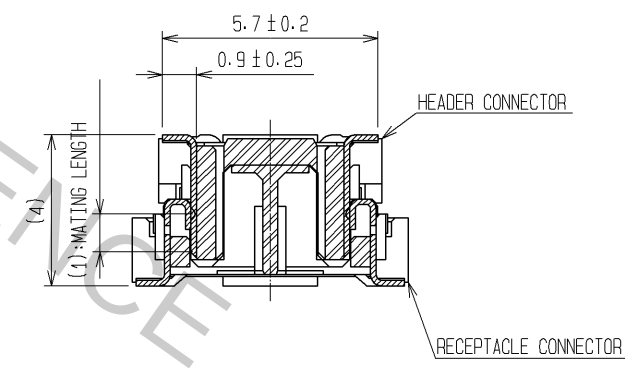

- NOTES
- 1 8 HATCHED PARTS: GROUND CIRCUIT.
 - 2 2 HATCHED PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

			4	PHOSPHOR BRONZE	TIN-PLATING												
2			3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.												
1					LEAD AREA :TIN-PLATING 1μm min.												
LCP					UNDER PLATING : NICKEL 1μm min.												
1			BEIGE UL94V-0														
NO.		MATERIAL		FINISH		REMARKS		NO.		MATERIAL		FINISH		REMARKS			
UNITS mm				SCALE 4 : 1				COUNT	DESCRIPTION OF REVISIONS			DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.				APPROVED :HS. OKAWA				08.06.26		DRAWING NO. EDC3-151948-25							
				CHECED :HT. YAMAGUCHI				08.06.25		PART NO. FX10B-80P/8-SV(71)							
				DESIGNED :SY. KAMIGA				08.06.23		CODE NO. CL570-0021-2-71							
				DRAWN :HK. SUNADORI				08.06.17									
 1/1																	