


Current Transducer LA 55-P

$$I_{PN} = 50 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Electrical data

I_{PN}	Primary nominal r.m.s. current	50				A
I_P	Primary current, measuring range	0 .. ± 70				A
R_M	Measuring resistance @	T_A = 70°C		T_A = 85°C		
		R_{M min}	R_{M max}	R_{M min}	R_{M max}	
	with ± 12 V	@ ± 50 A _{max}	10	100	60	95 Ω
		@ ± 70 A _{max}	10	50	60 ¹⁾	60 ¹⁾ Ω
	with ± 15 V	@ ± 50 A _{max}	50	160	135	155 Ω
		@ ± 70 A _{max}	50	90	135 ²⁾	135 ²⁾ Ω
I_{SN}	Secondary nominal r.m.s. current	50				mA
K_N	Conversion ratio	1 : 1000				
V_C	Supply voltage (± 5 %)	± 12 .. 15				V
I_C	Current consumption	10 (@ ±15 V) + I _S				mA
V_d	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	2.5				kV

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$	@ $\pm 15 \text{ V} (\pm 5 \%)$	± 0.65	%
		@ $\pm 12 \dots 15 \text{ V} (\pm 5 \%)$	± 0.90	%
e_L	Linearity		< 0.15	%
I_O	Offset current @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Typ	Max	
I_{OM}	Residual current ³⁾ @ $I_P = 0$, after an overload of $3 \times I_{PN}$		± 0.2	mA
I_{OT}	Thermal drift of I_O		± 0.3	mA
	0°C .. + 70°C	± 0.1	± 0.5	mA
	- 25°C .. + 85°C	± 0.1	± 0.6	mA
t_{ra}	Reaction time @ 10 % of I_{PN}	< 500	ns	
t_r	Response time @ 90 % of I_{PN}	< 1	μs	
di/dt	di/dt accurately followed	> 200	A/ μs	
f	Frequency bandwidth (- 1 dB)	DC .. 200	kHz	

General data

T_A	Ambient operating temperature	- 25 .. + 85	$^\circ\text{C}$
T_S	Ambient storage temperature	- 40 .. + 90	$^\circ\text{C}$
R_S	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	80 Ω
		$T_A = 85^\circ\text{C}$	85 Ω
m	Mass	18	g
	Standards ⁴⁾	EN 50178(97.10.01)	

Features

- Closed loop (compensated) current transducer using the Hall effect
- Printed circuit board mounting
- Insulated plastic case recognized according to UL 94-V0.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.


Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

- Notes :**
- ¹⁾ Measuring range limited to $\pm 60 \text{ A}_{\max}$
 - ²⁾ Measuring range limited to $\pm 55 \text{ A}_{\max}$
 - ³⁾ Result of the coercive field of the magnetic circuit
 - ⁴⁾ A list of corresponding tests is available

030709/9

Dimensions LA 55-P (in mm. 1 mm = 0.0394 inch)

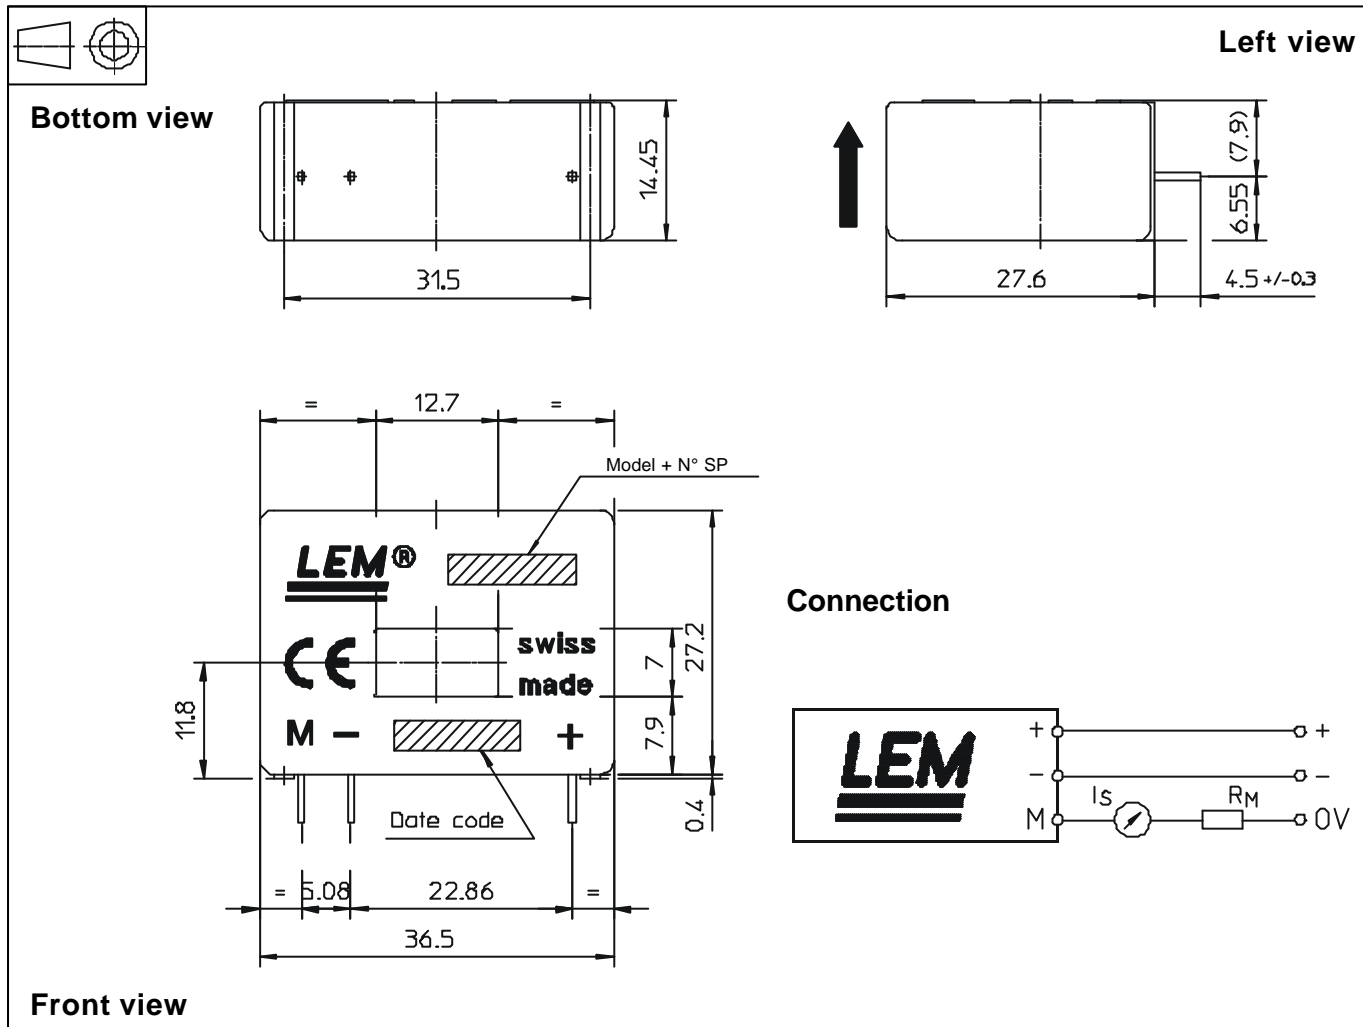

Mechanical characteristics

• General tolerance	± 0.2 mm
• Primary through-hole	12.7 x 7 mm
• Fastening & connection of secondary	3 pins
	0.63 x 0.56 mm
Recommended PCB hole	0.9 mm

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 90°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.
- In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.